

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P921293

Luminaire Tested: DFN2DIP-4P3F0-030D020US940-RLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P921293
REPORT IS A COMBINATION OF REPORTS P900552 AND P897473
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P3F0-030D020US940-RLLONL
Description: 3 foot, 90deg - 4way Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4039.4 lumens
Efficiency: N/A
Efficacy: 97.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.07' x L: 3.07' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 41.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P921293

CATALOG NUMBER: DFN2DIP-4P3F0-030D020US940-RLLONL

Luminous Intensity Polar Plot

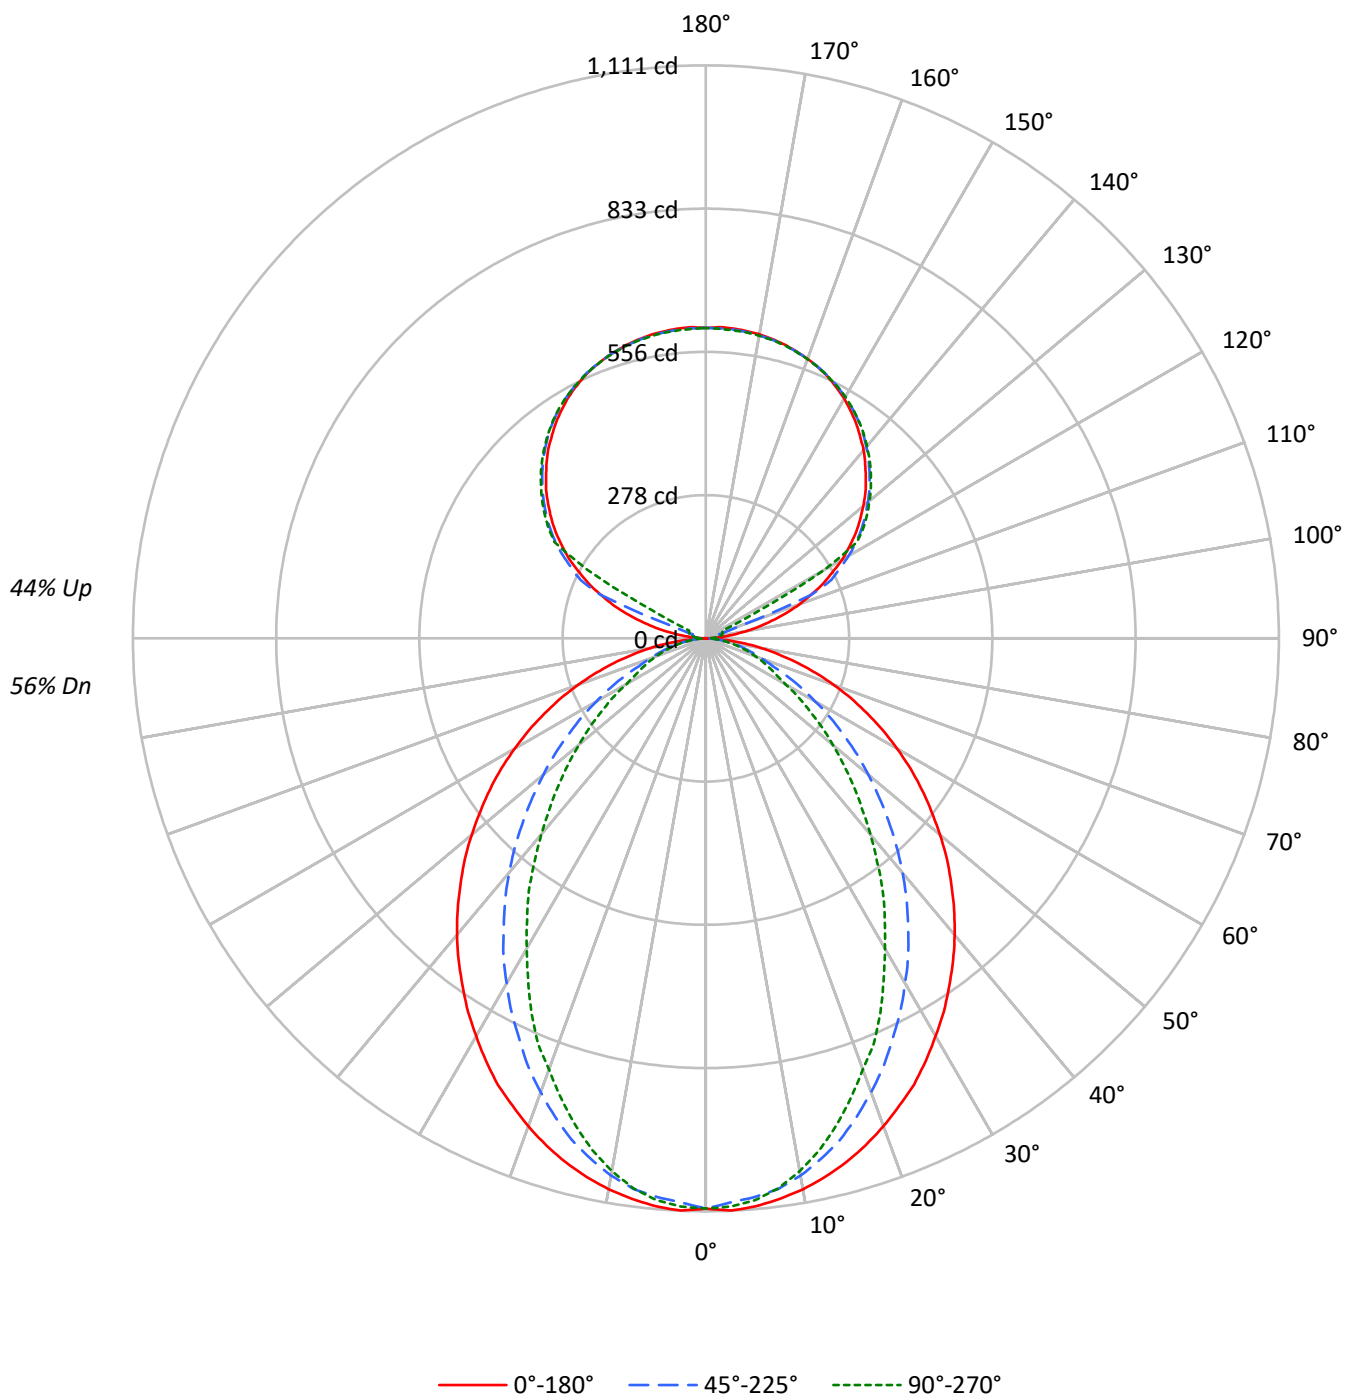

TEST NUMBER: P921293

CATALOG NUMBER: DFN2DIP-4P3F0-030D020US940-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	109	109	109	109	101	101	101	101	87	87	87	74	74	74	62	62	62
1	100	96	92	88	93	89	86	83	77	75	72	66	64	63	56	54	53
2	91	84	78	73	85	79	73	69	68	64	61	58	56	53	50	48	46
3	84	74	67	62	78	70	63	58	61	56	52	52	49	46	44	42	40
4	77	66	59	53	71	62	55	50	54	49	45	47	43	40	40	37	35
5	71	59	51	46	66	56	49	43	49	43	39	42	38	35	36	33	31
6	65	54	46	40	61	50	43	38	44	39	34	39	34	31	33	30	27
7	61	49	41	35	56	46	39	34	40	35	30	35	31	27	30	27	24
8	56	44	37	31	52	42	35	30	37	31	27	32	28	25	28	25	22
9	53	41	33	28	49	38	32	27	34	28	25	30	25	22	26	23	20
10	49	37	30	25	46	35	29	24	31	26	22	28	23	20	24	21	18

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1260	1260	1260
5°	1261	1239	1247
10°	1248	1214	1207
15°	1230	1173	1143
20°	1206	1117	1066
25°	1182	1054	991
30°	1150	990	897
35°	1119	921	814
40°	1087	850	719
45°	1050	771	632
50°	1011	691	548
55°	971	606	467
60°	924	517	384
65°	870	427	346
70°	805	343	312
75°	722	301	283
80°	604	250	244
85°	410	163	181

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1050 cd/sqm

TEST NUMBER: P921293

CATALOG NUMBER: DFN2DIP-4P3F0-030D020US940-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	103.6	2.6
10°-20°	284.5	7.0
20°-30°	399.4	9.9
30°-40°	435.3	10.8
40°-50°	400.1	9.9
50°-60°	314.2	7.8
60°-70°	204.5	5.1
70°-80°	105.3	2.6
80°-90°	27.9	0.7
90°-100°	19.8	0.5
100°-110°	74.0	1.8
110°-120°	196.2	4.9
120°-130°	325.4	8.1
130°-140°	345.7	8.6
140°-150°	321.3	8.0
150°-160°	258.3	6.4
160°-170°	166.4	4.1
170°-180°	57.3	1.4
0°-30°	787.5	19.5
0°-40°	1222.8	30.3
0°-60°	1937.2	48.0
0°-90°	2274.9	56.3
90°-120°	290.0	7.2
90°-150°	1282.5	31.7
90°-180°	1765.0	43.7
0°-180°	4039.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1106	1106	1106	1106	1106	
5°	1106	1101	1088	1097	1094	105
15°	1052	1040	1007	988	978	296
25°	955	922	856	816	800	439
35°	822	771	683	620	598	515
45°	672	605	500	429	405	519
55°	511	433	325	265	246	457
65°	345	264	174	140	137	342
75°	184	114	80	73	72	195
85°	43	22	19	19	19	49
90°	0	5	9	11	12	4
95°	28	14	17	19	19	33
105°	132	145	27	31	33	141
115°	250	258	269	67	36	247
125°	354	360	368	371	372	316
135°	438	445	449	453	452	338
145°	508	508	515	518	516	318
155°	560	556	561	564	560	258
165°	590	587	588	592	588	167
175°	603	600	601	604	600	57
180°	602	602	602	602	602	

TEST NUMBER: P921293

CATALOG NUMBER: DFN2DIP-4P3F0-030D020US940-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1105.6	1105.6	1105.6	1105.6	1105.6
2.5°	1110.6	1105.6	1094.6	1104.7	1102.7
5°	1105.6	1100.6	1087.6	1096.6	1093.6
7.5°	1096.6	1090.7	1076.7	1080.6	1075.6
10°	1084.6	1077.6	1057.7	1054.5	1048.7
12.5°	1069.6	1060.6	1033.6	1027.6	1016.5
15°	1051.6	1040.5	1006.6	987.6	977.6
17.5°	1030.5	1014.6	972.5	950.6	934.5
20°	1006.6	986.5	936.5	911.6	889.5
22.5°	980.6	957.5	899.5	865.5	850.5
25°	954.6	922.5	856.5	815.5	800.4
27.5°	923.5	889.5	816.5	769.5	746.4
30°	890.6	852.5	772.4	721.5	694.4
32.5°	858.4	812.4	730.5	670.4	645.3
35°	822.5	771.4	683.4	620.4	598.3
37.5°	787.5	732.4	639.4	570.2	545.4
40°	750.5	690.5	593.3	522.3	496.3
42.5°	712.4	648.5	547.3	473.2	448.3
45°	672.4	605.3	500.3	429.2	405.2
47.5°	634.4	563.4	455.3	384.1	362.2
50°	592.4	521.3	411.3	342.1	321.2
52.5°	551.3	476.3	369.3	303.2	284.2
55°	511.2	433.2	325.1	265.2	246.2
57.5°	470.3	390.2	286.2	230.2	214.1
60°	428.2	348.2	245.1	194.1	178.2
62.5°	387.3	307.2	210.1	162.1	154.2
65°	345.2	264.1	174.1	140.1	137.1
67.5°	305.2	224.1	140.1	123.1	120.0
70°	263.1	185.1	116.0	106.0	102.0
72.5°	223.1	149.0	97.0	89.1	87.0
75°	184.0	114.0	80.1	73.0	72.1
77.5°	145.1	81.0	63.0	59.0	57.0
80°	109.1	58.1	48.0	44.1	44.1
82.5°	76.0	39.1	33.0	31.0	31.0
85°	43.0	21.9	19.0	19.0	19.0
87.5°	16.1	7.9	7.9	7.0	7.0
90°	0.4	5.3	8.6	10.9	11.8
92.5°	10.9	9.2	10.4	11.3	11.8
95°	28.3	13.9	16.9	19.2	18.7
97.5°	50.9	15.2	22.2	23.5	24.0
100°	77.1	17.4	24.8	28.3	29.2
102.5°	105.8	105.0	25.7	30.5	31.8
105°	132.4	145.4	26.6	31.3	33.1
107.5°	163.4	174.2	27.5	32.2	34.0
110°	193.0	202.1	76.2	32.7	34.4

TEST NUMBER: P921293

CATALOG NUMBER: DFN2DIP-4P3F0-030D020US940-RLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	220.8	228.6	221.2	33.5	34.9
115°	250.4	257.8	268.8	67.1	35.8
117.5°	276.1	284.8	292.2	230.0	115.8
120°	304.9	311.4	319.2	324.5	265.6
122.5°	329.2	336.2	344.9	347.5	348.0
125°	354.1	359.7	368.0	371.0	372.4
127.5°	376.7	382.8	389.4	393.7	394.1
130°	398.1	405.0	409.8	414.6	414.2
132.5°	419.8	425.5	430.3	434.2	433.8
135°	438.2	445.1	449.0	453.4	452.5
137.5°	457.3	462.5	466.9	471.3	469.9
140°	476.0	479.6	484.3	488.2	486.1
142.5°	491.7	494.8	500.4	503.9	501.7
145°	508.3	507.8	515.2	518.3	516.1
147.5°	522.6	521.3	528.7	530.8	529.1
150°	536.5	533.5	540.5	543.1	540.9
152.5°	548.3	544.8	551.3	554.0	550.9
155°	559.6	555.7	561.0	563.6	560.1
157.5°	568.8	565.3	569.3	572.3	568.8
160°	576.7	574.0	576.7	579.3	576.2
162.5°	583.5	580.9	583.2	586.2	582.3
165°	589.7	587.1	588.4	591.5	588.4
167.5°	594.5	591.8	593.2	596.3	592.3
170°	598.4	595.8	596.6	599.7	595.8
172.5°	601.0	598.4	599.3	602.4	598.4
175°	603.2	600.1	601.0	604.0	599.7
177.5°	604.0	601.0	601.5	604.5	600.6
180°	601.9	601.9	601.9	601.9	601.9

TEST NUMBER: P921293

CATALOG NUMBER: DFN2DIP-4P3F0-030D020US940-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.49	9.37	9.39	10.29	11.47	4.45	5.33	5.36	6.26	7.44
	3H	10.16	10.96	11.08	11.89	13.09	5.63	6.43	6.55	7.36	8.56
	4H	10.77	11.52	11.71	12.46	13.67	6.08	6.83	7.02	7.77	8.98
	6H	11.19	11.88	12.14	12.82	14.05	6.40	7.09	7.35	8.03	9.26
	8H	11.32	11.97	12.27	12.93	14.16	6.49	7.14	7.44	8.10	9.33
	12H	11.38	12.00	12.34	12.96	14.21	6.53	7.15	7.49	8.11	9.36
4H	2H	8.51	9.26	9.45	10.19	11.41	5.05	5.80	5.99	6.73	7.95
	3H	10.34	10.96	11.29	11.93	13.16	6.40	7.02	7.35	7.98	9.21
	4H	11.03	11.59	11.99	12.56	13.81	6.94	7.51	7.90	8.47	9.72
	6H	11.54	12.03	12.52	13.02	14.27	7.36	7.84	8.33	8.83	10.08
	8H	11.72	12.17	12.69	13.15	14.42	7.48	7.94	8.46	8.92	10.18
	12H	11.81	12.22	12.80	13.22	14.49	7.55	7.96	8.54	8.95	10.22
8H	4H	11.00	11.45	11.97	12.43	13.70	7.22	7.68	8.20	8.65	9.92
	6H	11.56	11.94	12.56	12.96	14.22	7.73	8.11	8.73	9.13	10.40
	8H	11.78	12.11	12.78	13.12	14.40	7.92	8.25	8.93	9.26	10.54
	12H	11.91	12.21	12.92	13.21	14.54	8.04	8.33	9.05	9.33	10.66
12H	4H	10.95	11.36	11.95	12.36	13.63	7.23	7.64	8.22	8.63	9.91
	6H	11.54	11.87	12.55	12.88	14.16	7.78	8.11	8.79	9.12	10.41
	8H	11.76	12.05	12.77	13.05	14.38	7.99	8.28	9.00	9.28	10.61