

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P921326

Luminaire Tested: DFN2DIP-4P3F0-040D060US940-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P921326
REPORT IS A COMBINATION OF REPORTS P899073 AND P895917
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P3F0-040D060US940-FLLFLL
Description: 3 foot, 90deg - 4way Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8266.2 lumens
Efficiency: N/A
Efficacy: 97.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.07' x L: 3.07' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 84.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P921326

CATALOG NUMBER: DFN2DIP-4P3F0-040D060US940-FLLFLL

Luminous Intensity Polar Plot

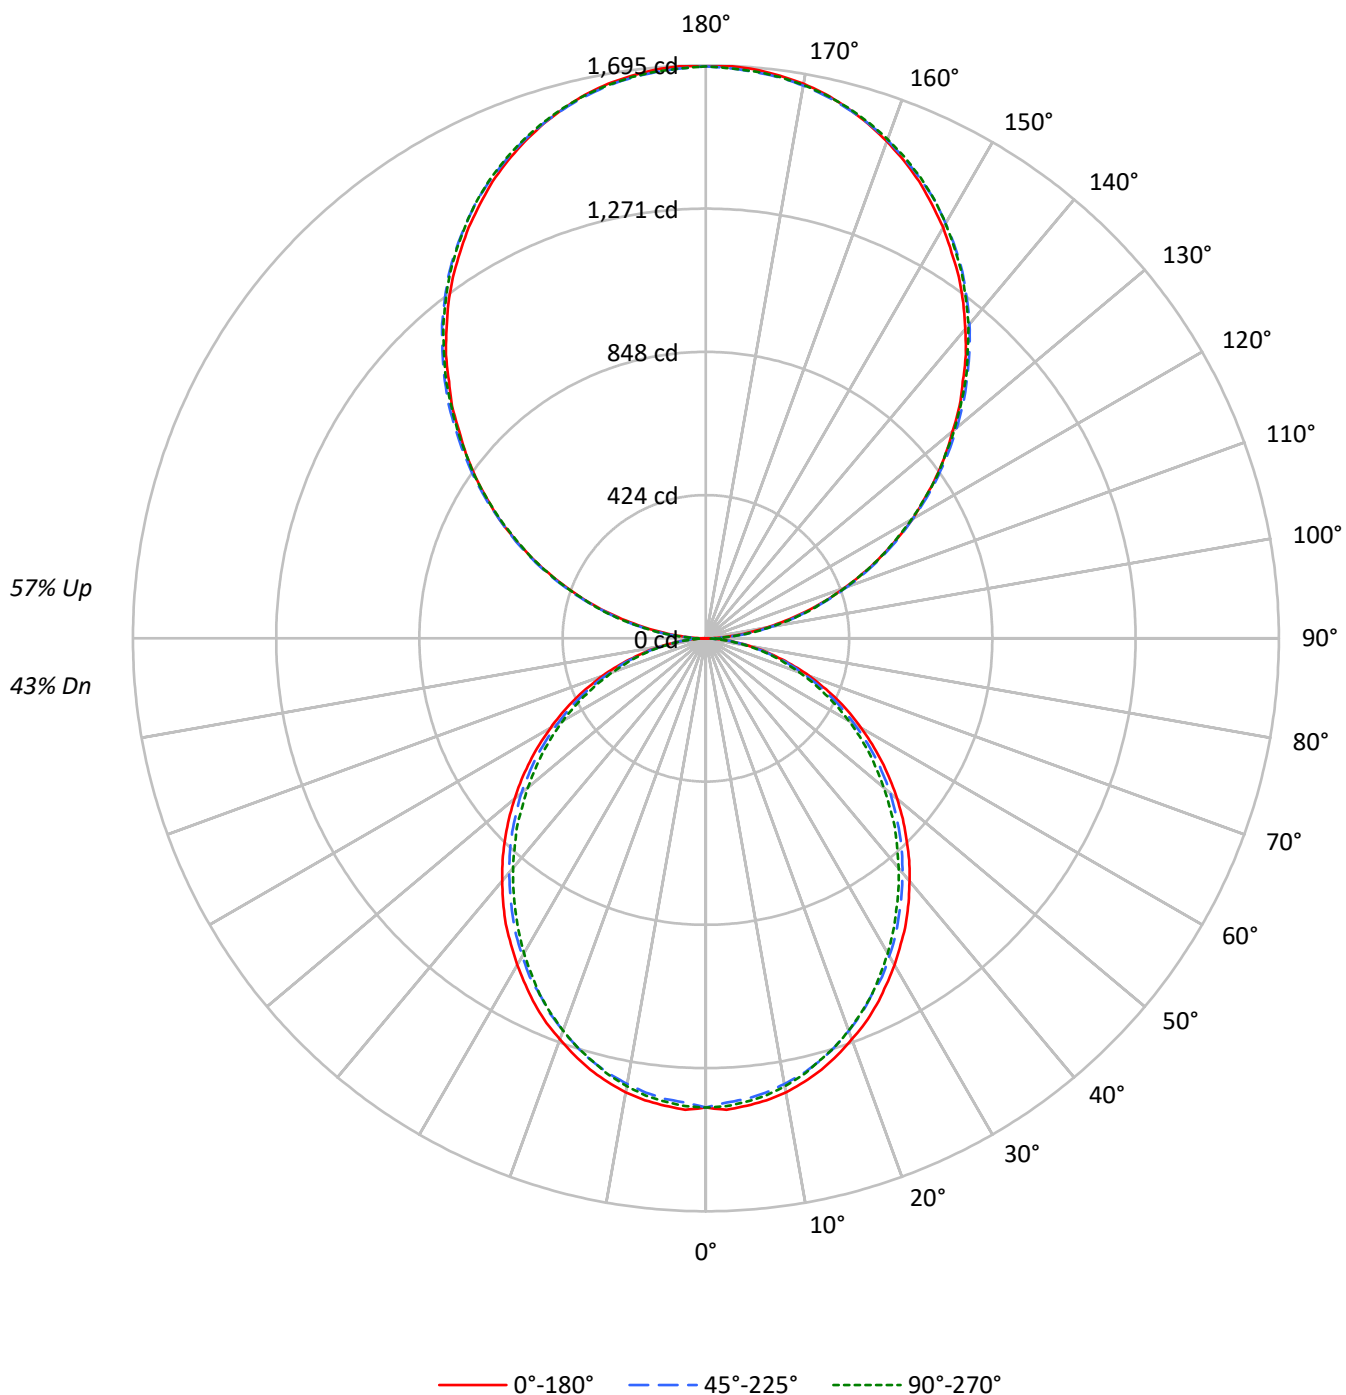

TEST NUMBER: P921326

CATALOG NUMBER: DFN2DIP-4P3F0-040D060US940-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	96	96	96	96	79	79	79	64	64	64	49	49	49
1	96	92	88	85	88	84	81	78	69	67	65	56	54	53	44	43	42
2	88	80	74	69	80	73	68	64	61	57	54	49	47	44	38	37	35
3	80	70	63	57	73	65	58	53	54	49	45	44	40	37	34	32	30
4	73	62	55	49	66	57	50	45	48	43	39	39	35	32	30	28	26
5	67	56	47	42	61	51	44	39	43	37	33	35	31	28	27	25	22
6	62	50	42	36	56	46	39	34	38	33	29	31	27	24	25	22	20
7	57	45	37	31	52	41	34	29	35	29	25	29	24	21	23	20	18
8	53	41	33	28	48	38	31	26	32	26	23	26	22	19	21	18	16
9	49	37	30	25	45	34	28	23	29	24	20	24	20	17	19	16	14
10	46	34	27	22	42	31	25	21	27	22	18	22	18	15	18	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1582	1582	1582
5°	1583	1559	1570
10°	1569	1537	1548
15°	1545	1510	1514
20°	1513	1474	1480
25°	1481	1431	1440
30°	1441	1391	1389
35°	1403	1344	1336
40°	1357	1296	1285
45°	1310	1248	1233
50°	1260	1198	1173
55°	1206	1140	1118
60°	1146	1071	1054
65°	1080	999	979
70°	996	912	898
75°	880	807	823
80°	740	673	680
85°	521	446	445

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1695 cd/sqm

TEST NUMBER: P921326

CATALOG NUMBER: DFN2DIP-4P3F0-040D060US940-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	130.6	1.6
10°-20°	367.5	4.4
20°-30°	540.1	6.5
30°-40°	627.3	7.6
40°-50°	626.6	7.6
50°-60°	546.3	6.6
60°-70°	403.9	4.9
70°-80°	228.5	2.8
80°-90°	65.1	0.8
90°-100°	104.7	1.3
100°-110°	332.7	4.0
110°-120°	569.3	6.9
120°-130°	748.8	9.1
130°-140°	840.5	10.2
140°-150°	824.2	10.0
150°-160°	691.4	8.4
160°-170°	458.5	5.5
170°-180°	160.3	1.9
0°-30°	1038.3	12.6
0°-40°	1665.6	20.1
0°-60°	2838.5	34.3
0°-90°	3536.0	42.8
90°-120°	1006.7	12.2
90°-150°	3420.1	41.4
90°-180°	4730.0	57.2
0°-180°	8266.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1388	1388	1388	1388	1388	
5°	1388	1383	1368	1378	1376	132
15°	1321	1313	1296	1301	1295	372
25°	1196	1185	1162	1165	1162	550
35°	1032	1018	997	989	982	644
45°	840	830	810	796	790	648
55°	635	627	611	595	589	568
65°	428	420	407	395	388	424
75°	224	222	215	207	210	239
85°	55	53	52	48	47	61
90°	2	18	50	47	48	8
95°	74	89	91	91	89	83
105°	307	311	314	317	317	324
115°	571	580	577	575	571	565
125°	831	844	840	835	834	743
135°	1075	1091	1094	1092	1088	831
145°	1305	1315	1323	1325	1319	815
155°	1492	1496	1501	1508	1503	687
165°	1623	1622	1622	1632	1625	458
175°	1689	1685	1682	1692	1683	160
180°	1692	1692	1692	1692	1692	

TEST NUMBER: P921326

CATALOG NUMBER: DFN2DIP-4P3F0-040D060US940-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1387.9	1387.9	1387.9	1387.9	1387.9
2.5°	1396.0	1389.3	1374.6	1387.9	1385.4
5°	1387.9	1382.6	1367.9	1378.5	1376.0
7.5°	1378.5	1370.6	1355.8	1366.6	1364.0
10°	1364.0	1354.6	1338.6	1349.2	1345.2
12.5°	1343.8	1335.9	1319.9	1326.6	1323.8
15°	1321.2	1313.2	1295.8	1301.2	1294.6
17.5°	1293.2	1285.2	1267.8	1274.4	1267.8
20°	1262.4	1254.5	1235.8	1239.7	1234.6
22.5°	1231.8	1219.8	1202.4	1202.4	1199.7
25°	1195.7	1185.1	1162.4	1165.0	1162.4
27.5°	1155.7	1146.3	1129.1	1125.1	1118.5
30°	1115.7	1105.0	1085.0	1081.0	1075.7
32.5°	1073.0	1065.1	1043.7	1035.6	1030.2
35°	1031.6	1018.3	996.9	988.9	982.2
37.5°	984.9	972.9	951.5	942.2	935.5
40°	936.9	926.1	904.7	892.9	887.5
42.5°	890.2	879.4	858.2	844.7	836.8
45°	839.5	830.2	810.0	795.5	790.1
47.5°	790.1	780.7	759.4	744.7	736.7
50°	738.0	731.3	712.7	693.9	687.2
52.5°	687.2	678.0	660.7	646.0	636.6
55°	635.3	627.2	611.3	595.2	588.6
57.5°	583.2	576.6	559.1	543.1	537.8
60°	531.1	525.8	507.2	492.5	488.5
62.5°	480.5	471.1	457.8	444.4	439.1
65°	428.5	420.4	407.1	395.0	388.4
67.5°	375.1	368.3	356.4	347.1	341.7
70°	325.7	320.3	308.3	298.9	293.6
72.5°	275.0	269.6	263.0	253.6	249.6
75°	224.2	221.6	214.8	206.9	209.6
77.5°	178.8	173.4	170.8	166.7	162.8
80°	133.5	132.1	129.4	125.5	122.8
82.5°	90.8	90.8	89.5	84.1	84.1
85°	54.7	53.4	52.1	48.0	46.7
87.5°	24.1	21.4	18.7	14.7	13.3
90°	1.5	18.4	50.0	46.9	48.4
92.5°	31.7	42.9	44.4	45.9	45.9
95°	74.5	88.7	91.3	91.3	88.7
97.5°	123.9	137.2	142.9	142.9	142.9
100°	181.1	192.8	196.9	196.9	195.4
102.5°	241.3	249.9	255.6	257.1	255.6
105°	307.1	311.2	314.2	316.8	316.8
107.5°	372.4	378.5	378.5	379.5	372.4
110°	435.7	443.8	443.8	443.8	439.7

TEST NUMBER: P921326

CATALOG NUMBER: DFN2DIP-4P3F0-040D060US940-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	504.0	512.6	511.1	507.0	504.0
115°	571.3	579.5	576.9	575.4	571.3
117.5°	638.2	649.4	642.2	638.2	634.1
120°	705.5	716.8	705.5	705.5	700.9
122.5°	766.7	781.0	773.8	769.8	766.7
125°	831.0	843.7	839.6	835.1	833.6
127.5°	893.8	909.5	903.9	897.9	893.8
130°	952.4	970.8	968.2	965.2	959.6
132.5°	1018.2	1032.5	1033.5	1026.4	1022.3
135°	1074.9	1090.7	1093.7	1092.2	1088.1
137.5°	1138.1	1150.8	1153.4	1152.4	1146.3
140°	1193.7	1206.5	1213.6	1213.6	1208.0
142.5°	1250.8	1263.6	1267.7	1269.2	1263.6
145°	1304.9	1315.1	1323.3	1324.8	1319.2
147.5°	1353.3	1366.1	1372.3	1374.7	1369.1
150°	1403.4	1412.0	1417.6	1422.2	1417.6
152.5°	1447.7	1456.4	1463.6	1469.2	1463.6
155°	1492.1	1496.2	1500.7	1508.0	1503.3
157.5°	1530.4	1533.5	1536.0	1546.2	1539.1
160°	1564.6	1567.6	1569.1	1577.8	1571.7
162.5°	1596.2	1596.2	1597.7	1607.4	1600.3
165°	1623.2	1621.7	1621.7	1631.9	1624.8
167.5°	1647.7	1643.2	1643.2	1653.3	1646.2
170°	1666.1	1662.0	1660.5	1670.6	1662.0
172.5°	1678.8	1674.7	1673.2	1683.4	1674.7
175°	1689.0	1685.0	1681.9	1692.1	1683.4
177.5°	1694.6	1690.6	1687.5	1696.1	1687.5
180°	1692.1	1692.1	1692.1	1692.1	1692.1

TEST NUMBER: P921326

CATALOG NUMBER: DFN2DIP-4P3F0-040D060US940-FLLFL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.12	8.92	9.14	9.95	11.32	7.68	8.48	8.69	9.50	10.87
	3H	9.77	10.49	10.80	11.53	12.92	9.28	10.00	10.31	11.04	12.43
	4H	10.36	11.04	11.40	12.07	13.47	9.86	10.54	10.90	11.58	12.98
	6H	10.75	11.38	11.80	12.42	13.83	10.25	10.87	11.30	11.92	13.33
	8H	10.85	11.45	11.90	12.50	13.91	10.35	10.94	11.40	12.00	13.41
	12H	10.90	11.46	11.95	12.51	13.94	10.39	10.95	11.44	12.00	13.43
4H	2H	8.57	9.25	9.62	10.29	11.69	8.22	8.90	9.26	9.93	11.33
	3H	10.43	10.99	11.48	12.06	13.47	10.02	10.59	11.07	11.65	13.06
	4H	11.14	11.66	12.20	12.71	14.15	10.71	11.23	11.77	12.29	13.72
	6H	11.64	12.09	12.71	13.17	14.60	11.21	11.66	12.28	12.74	14.16
	8H	11.79	12.21	12.86	13.28	14.72	11.35	11.77	12.42	12.84	14.28
	12H	11.86	12.23	12.94	13.32	14.77	11.41	11.79	12.50	12.87	14.32
8H	4H	11.32	11.74	12.39	12.81	14.26	10.95	11.36	12.02	12.44	13.88
	6H	11.95	12.29	13.04	13.40	14.85	11.56	11.91	12.65	13.02	14.46
	8H	12.16	12.47	13.26	13.56	15.02	11.77	12.07	12.87	13.17	14.63
	12H	12.29	12.55	13.39	13.65	15.15	11.88	12.14	12.98	13.24	14.74
12H	4H	11.31	11.68	12.39	12.77	14.22	10.94	11.31	12.02	12.40	13.85
	6H	11.97	12.28	13.07	13.37	14.83	11.60	11.90	12.70	13.00	14.46
	8H	12.21	12.47	13.31	13.57	15.07	11.83	12.09	12.93	13.19	14.69