

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P924053

Luminaire Tested: DFN2DIP-4P3F0-040D050US950-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P924053
REPORT IS A COMBINATION OF REPORTS P900584 AND P897473
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P3F0-040D050US950-RLLONL
Description: 3 foot, 90deg - 4way Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7965.9 lumens
Efficiency: N/A
Efficacy: 105.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.07' x L: 3.07' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 75.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P924053

CATALOG NUMBER: DFN2DIP-4P3F0-040D050US950-RLLONL

Luminous Intensity Polar Plot

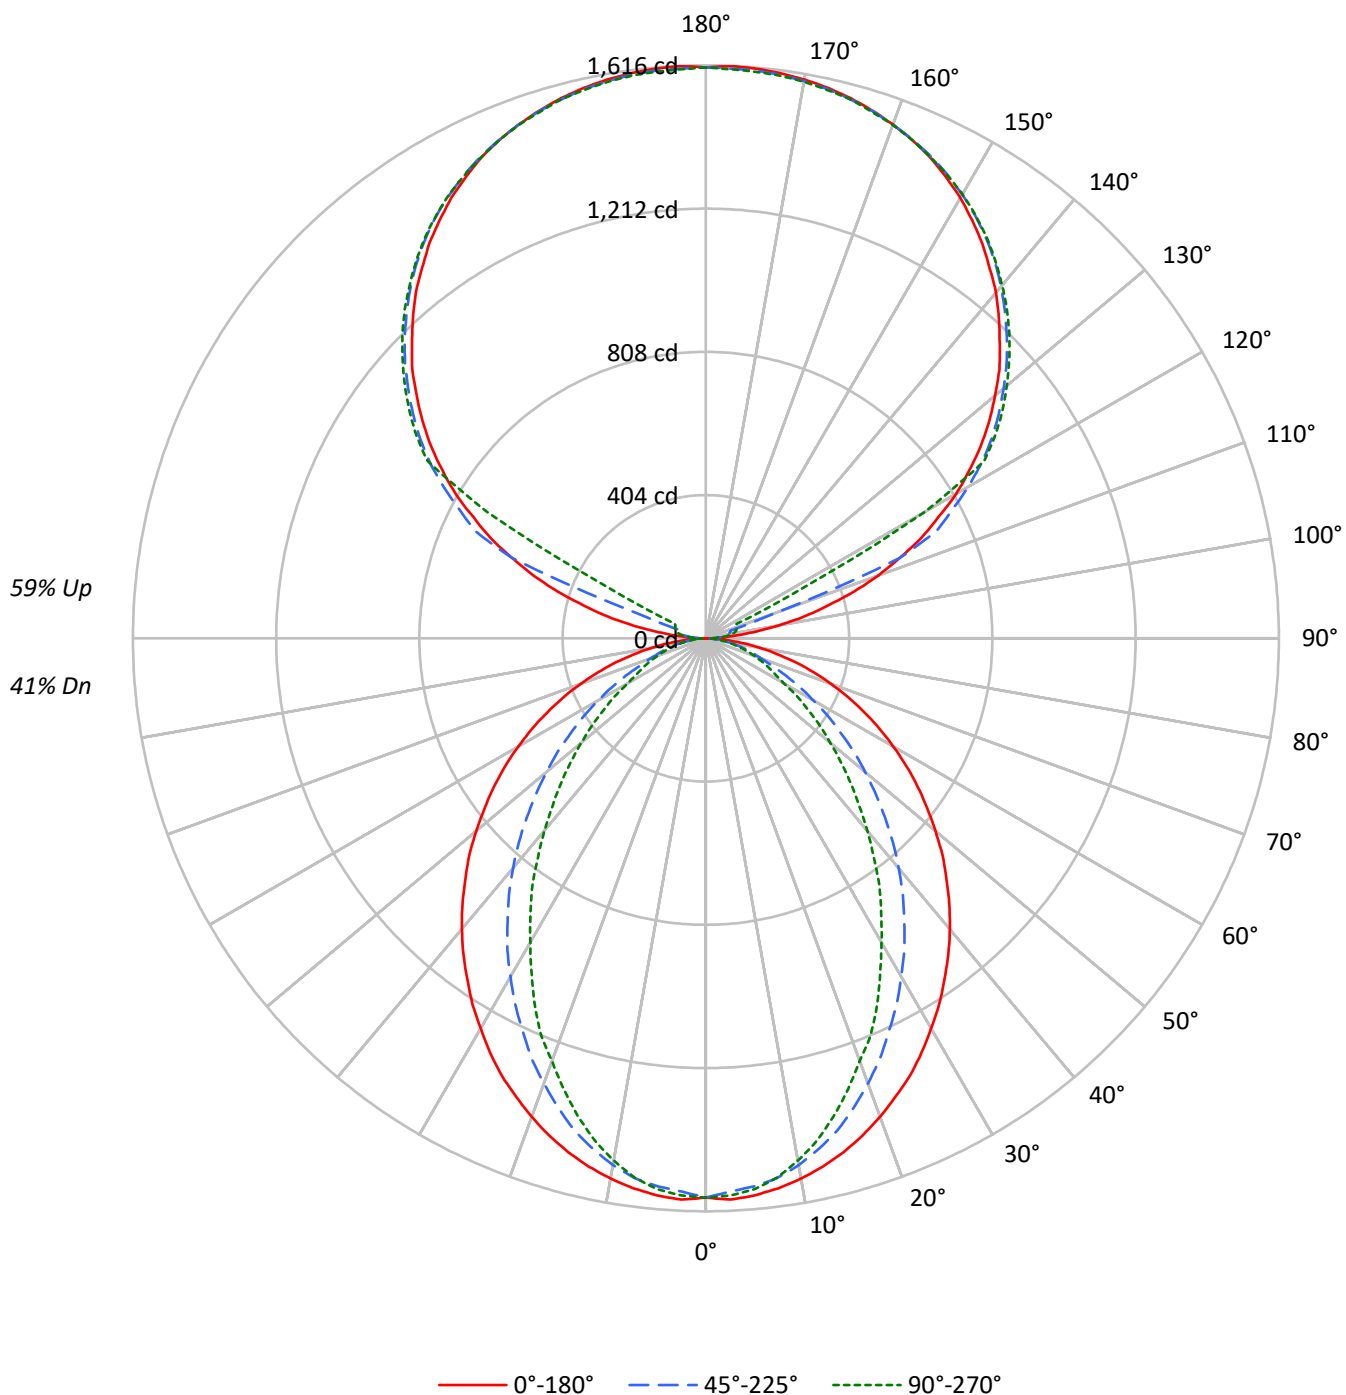

TEST NUMBER: P924053

CATALOG NUMBER: DFN2DIP-4P3F0-040D050US950-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	96	96	96	96	78	78	78	62	62	62	48	48	48
1	96	92	88	85	87	84	81	78	69	67	65	55	54	53	43	42	41
2	88	81	75	70	80	74	69	65	61	57	54	49	47	44	38	36	35
3	80	71	64	59	73	65	59	54	54	50	46	44	41	38	34	32	30
4	74	63	56	50	67	58	52	46	48	43	40	39	36	33	31	28	26
5	68	57	49	43	62	52	45	40	43	38	34	35	32	29	28	25	23
6	62	51	43	37	57	47	40	35	39	34	30	32	28	25	25	23	21
7	58	46	38	33	53	42	36	31	36	30	27	29	25	23	23	21	19
8	54	42	34	29	49	39	32	27	33	27	24	27	23	20	21	19	17
9	50	38	31	26	46	35	29	24	30	25	21	25	21	18	20	17	15
10	47	35	28	23	43	32	26	22	28	23	19	23	19	17	18	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1797	1797	1797
5°	1799	1768	1780
10°	1780	1732	1721
15°	1755	1673	1631
20°	1721	1593	1521
25°	1686	1504	1414
30°	1641	1412	1279
35°	1596	1314	1161
40°	1550	1212	1025
45°	1497	1100	902
50°	1442	986	782
55°	1385	865	667
60°	1318	738	548
65°	1241	609	493
70°	1148	490	445
75°	1031	429	404
80°	862	356	348
85°	584	232	258

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 1497 cd/sqm

TEST NUMBER: P924053

CATALOG NUMBER: DFN2DIP-4P3F0-040D050US950-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	147.8	1.9
10°-20°	405.8	5.1
20°-30°	569.7	7.2
30°-40°	621.0	7.8
40°-50°	570.8	7.2
50°-60°	448.2	5.6
60°-70°	291.8	3.7
70°-80°	150.2	1.9
80°-90°	41.2	0.5
90°-100°	53.1	0.7
100°-110°	197.9	2.5
110°-120°	524.8	6.6
120°-130°	870.4	10.9
130°-140°	924.6	11.6
140°-150°	859.3	10.8
150°-160°	690.9	8.7
160°-170°	445.2	5.6
170°-180°	153.2	1.9
0°-30°	1123.3	14.1
0°-40°	1744.3	21.9
0°-60°	2763.3	34.7
0°-90°	3246.4	40.8
90°-120°	775.8	9.7
90°-150°	3430.2	43.1
90°-180°	4719.0	59.2
0°-180°	7965.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1577	1577	1577	1577	1577	
5°	1577	1570	1551	1564	1560	150
15°	1500	1484	1436	1409	1395	423
25°	1362	1316	1222	1163	1142	626
35°	1173	1100	975	885	853	734
45°	959	864	714	612	578	741
55°	729	618	464	378	351	652
65°	492	377	248	200	196	488
75°	262	163	114	104	103	278
85°	61	31	27	27	27	70
90°	1	14	23	29	31	7
95°	76	37	45	51	50	90
105°	354	389	71	84	88	378
115°	670	690	719	179	96	659
125°	947	962	984	992	996	845
135°	1172	1191	1201	1213	1210	905
145°	1359	1358	1378	1386	1380	850
155°	1497	1486	1500	1507	1498	690
165°	1577	1570	1574	1582	1574	446
175°	1613	1605	1608	1616	1604	154
180°	1610	1610	1610	1610	1610	

TEST NUMBER: P924053

CATALOG NUMBER: DFN2DIP-4P3F0-040D050US950-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1577.2	1577.2	1577.2	1577.2	1577.2
2.5°	1584.3	1577.2	1561.4	1575.8	1572.9
5°	1577.2	1570.0	1551.4	1564.3	1560.1
7.5°	1564.3	1555.8	1535.8	1541.4	1534.3
10°	1547.2	1537.2	1508.7	1504.3	1495.9
12.5°	1525.8	1512.9	1474.3	1465.8	1450.1
15°	1500.1	1484.3	1435.9	1408.8	1394.6
17.5°	1470.1	1447.2	1387.2	1355.9	1333.0
20°	1435.9	1407.2	1335.9	1300.3	1268.8
22.5°	1398.8	1365.9	1283.0	1234.6	1213.3
25°	1361.6	1315.9	1221.7	1163.3	1141.7
27.5°	1317.5	1268.8	1164.6	1097.6	1064.7
30°	1270.3	1216.0	1101.8	1029.1	990.5
32.5°	1224.6	1158.9	1042.0	956.3	920.5
35°	1173.3	1100.4	974.9	884.9	853.4
37.5°	1123.3	1044.7	912.0	813.5	777.9
40°	1070.5	984.9	846.4	745.1	708.0
42.5°	1016.2	924.9	780.8	675.1	639.5
45°	959.2	863.5	713.7	612.3	578.0
47.5°	905.0	803.6	649.5	548.1	516.7
50°	845.0	743.6	586.6	488.1	458.2
52.5°	786.4	679.3	526.7	432.4	405.4
55°	729.3	618.0	463.8	378.3	351.2
57.5°	670.9	556.7	408.2	328.3	305.5
60°	610.8	496.7	349.6	276.9	254.1
62.5°	552.5	438.3	299.7	231.2	219.9
65°	492.5	376.7	248.3	199.9	195.5
67.5°	435.4	319.7	199.9	175.5	171.2
70°	375.4	264.1	165.5	151.3	145.5
72.5°	318.3	212.6	138.4	127.1	124.2
75°	262.5	162.7	114.2	104.2	102.8
77.5°	207.0	115.5	90.0	84.2	81.3
80°	155.5	82.8	68.4	62.9	62.9
82.5°	108.5	55.7	47.1	44.2	44.2
85°	61.3	31.4	27.1	27.1	27.1
87.5°	22.9	11.4	11.4	10.0	10.0
90°	1.1	13.9	23.3	29.2	31.4
92.5°	29.2	24.5	28.0	30.3	31.4
95°	75.7	37.2	45.4	51.3	50.1
97.5°	136.2	40.8	59.3	63.0	64.0
100°	206.3	46.7	66.4	75.7	78.0
102.5°	283.1	280.8	68.8	81.5	85.1
105°	354.1	389.1	71.1	83.9	88.5
107.5°	436.8	465.8	73.5	86.1	90.9
110°	516.1	540.4	203.9	87.4	92.0



TEST NUMBER: P924053

CATALOG NUMBER: DFN2DIP-4P3F0-040D050US950-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	590.6	611.5	591.8	89.7	93.2
115°	669.8	689.6	718.7	179.4	95.6
117.5°	738.5	761.8	781.7	614.9	309.9
120°	815.4	832.8	853.8	867.9	710.5
122.5°	880.5	899.2	922.6	929.6	930.8
125°	946.9	962.2	984.3	992.4	996.0
127.5°	1007.5	1023.8	1041.5	1053.0	1054.2
130°	1064.7	1083.4	1096.1	1108.9	1107.9
132.5°	1123.0	1138.1	1150.8	1161.4	1160.3
135°	1171.9	1190.6	1200.9	1212.7	1210.3
137.5°	1223.0	1237.1	1248.8	1260.4	1257.0
140°	1273.1	1282.6	1295.2	1305.7	1300.0
142.5°	1315.2	1323.4	1338.5	1347.7	1341.9
145°	1359.4	1358.2	1378.0	1386.2	1380.3
147.5°	1397.8	1394.3	1414.1	1419.9	1415.4
150°	1435.1	1427.0	1445.6	1452.6	1446.7
152.5°	1466.5	1457.2	1474.7	1481.8	1473.5
155°	1496.8	1486.4	1500.4	1507.3	1498.1
157.5°	1521.2	1512.0	1522.5	1530.7	1521.2
160°	1542.3	1535.3	1542.3	1549.2	1541.1
162.5°	1560.8	1554.0	1559.7	1567.9	1557.4
165°	1577.2	1570.3	1573.7	1581.8	1573.7
167.5°	1590.0	1583.0	1586.6	1594.7	1584.2
170°	1600.5	1593.5	1595.9	1604.0	1593.5
172.5°	1607.5	1600.5	1602.9	1611.0	1600.5
175°	1613.3	1605.1	1607.5	1615.6	1604.0
177.5°	1615.6	1607.5	1608.7	1616.8	1606.3
180°	1609.8	1609.8	1609.8	1609.8	1609.8

TEST NUMBER: P924053

CATALOG NUMBER: DFN2DIP-4P3F0-040D050US950-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.22	8.98	9.26	10.02	11.42	4.18	4.94	5.22	5.98	7.38
	3H	9.89	10.57	10.94	11.62	13.04	5.36	6.04	6.41	7.09	8.51
	4H	10.49	11.14	11.55	12.19	13.61	5.80	6.45	6.86	7.50	8.92
	6H	10.91	11.50	11.98	12.55	13.99	6.11	6.71	7.18	7.76	9.20
	8H	11.03	11.59	12.10	12.66	14.10	6.20	6.76	7.27	7.83	9.27
	12H	11.09	11.62	12.17	12.69	14.14	6.24	6.77	7.32	7.84	9.29
4H	2H	8.23	8.87	9.30	9.93	11.35	4.77	5.41	5.83	6.46	7.89
	3H	10.05	10.58	11.12	11.66	13.10	6.10	6.64	7.18	7.72	9.16
	4H	10.73	11.22	11.81	12.29	13.75	6.64	7.13	7.72	8.20	9.66
	6H	11.24	11.66	12.33	12.75	14.21	7.05	7.47	8.14	8.57	10.02
	8H	11.41	11.80	12.50	12.89	14.36	7.18	7.57	8.26	8.65	10.12
	12H	11.50	11.86	12.61	12.95	14.43	7.23	7.59	8.34	8.69	10.16
8H	4H	10.69	11.09	11.78	12.17	13.64	6.92	7.31	8.00	8.39	9.86
	6H	11.25	11.58	12.36	12.70	14.17	7.42	7.75	8.53	8.87	10.34
	8H	11.47	11.75	12.58	12.86	14.35	7.61	7.89	8.73	9.00	10.49
	12H	11.60	11.85	12.72	12.95	14.48	7.72	7.97	8.84	9.07	10.60
12H	4H	10.64	11.00	11.75	12.10	13.57	6.92	7.27	8.02	8.37	9.85
	6H	11.23	11.51	12.34	12.62	14.11	7.47	7.75	8.59	8.86	10.35
	8H	11.44	11.69	12.56	12.80	14.32	7.67	7.92	8.79	9.03	10.55