

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P902289

Luminaire Tested: DFN2DIP-4P4F0-030D060US830-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P902289
REPORT IS A COMBINATION OF REPORTS P900636 AND P897523
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P4F0-030D060US830-RLLONL
Description: 4 foot, 90deg - 4way Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open
No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8002.2 lumens
Efficiency: N/A
Efficacy: 102.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 4.07' x L: 4.07' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 78
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.983
Total Harmonic Distortion (THDi): 0.073
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P902289

CATALOG NUMBER: DFN2DIP-4P4F0-030D060US830-RLLONL

Luminous Intensity Polar Plot

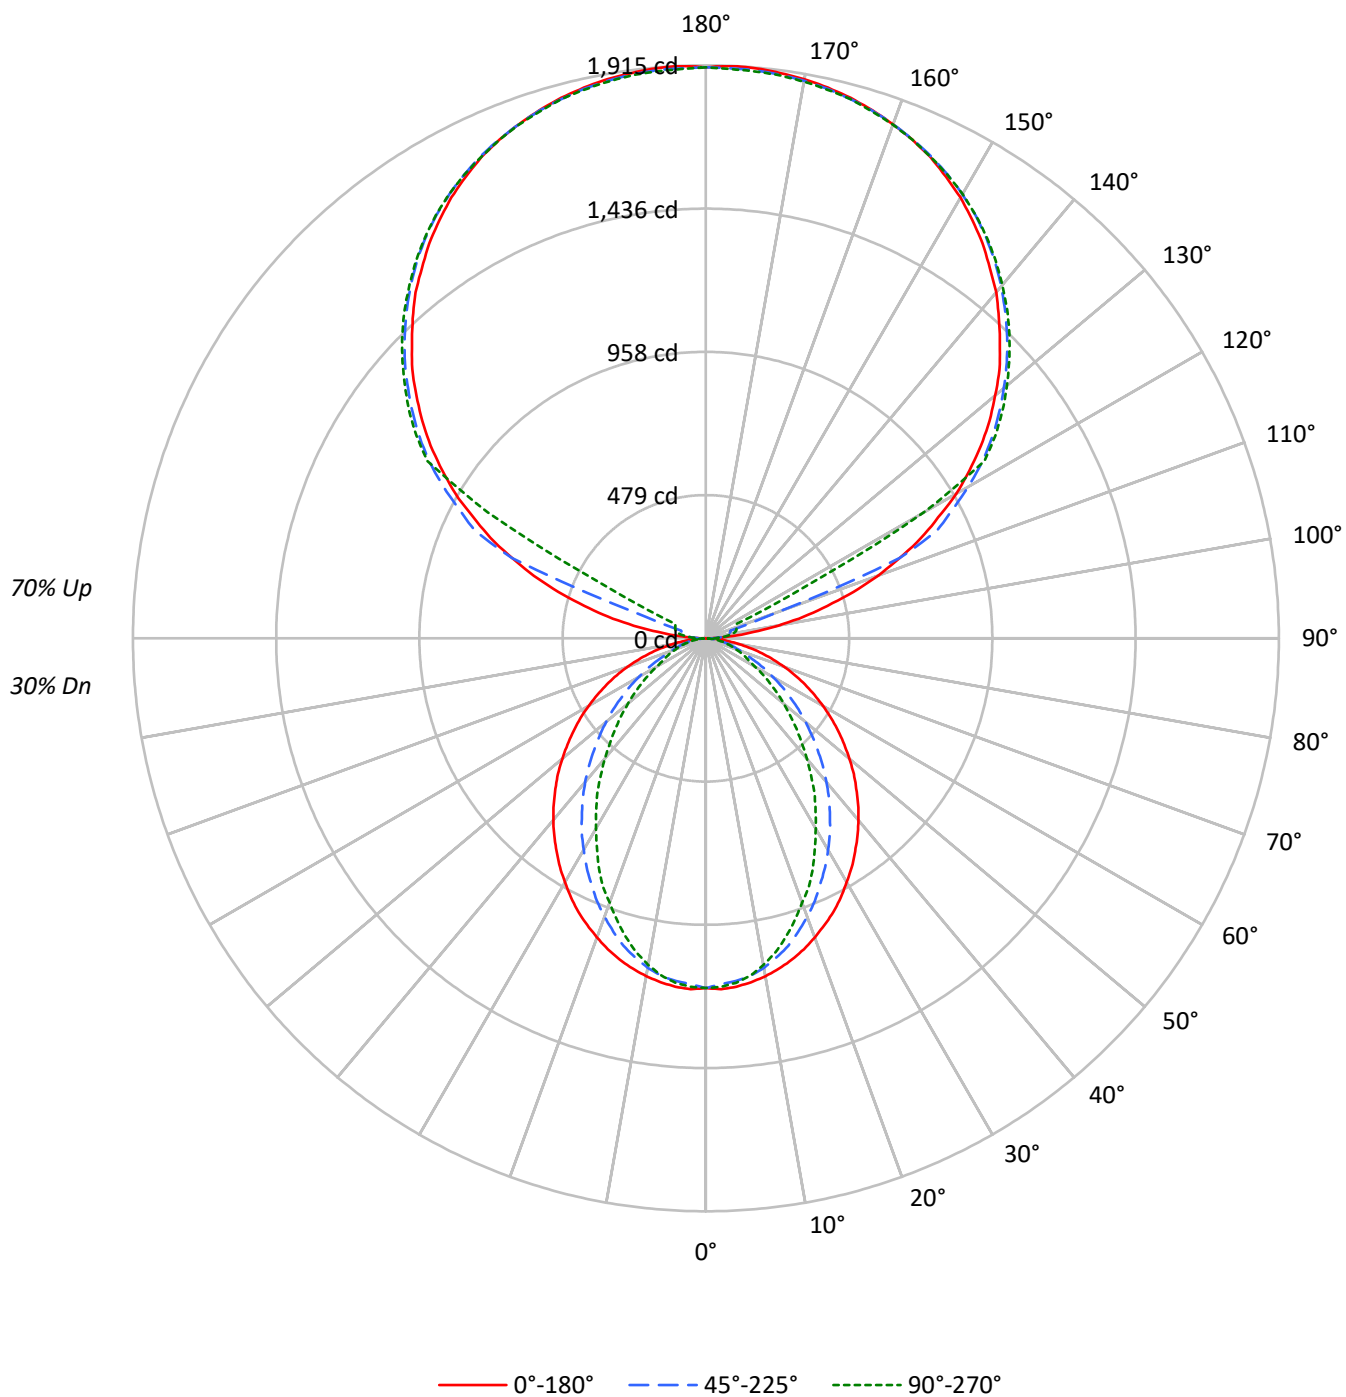

TEST NUMBER: P902289

CATALOG NUMBER: DFN2DIP-4P4F0-030D060US830-RLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	102	102	102	102	92	92	92	92	72	72	72	54	54	54	38	38	38
1	94	90	86	83	84	81	77	75	64	62	60	48	47	46	34	33	32
2	85	78	73	68	76	71	66	62	56	53	50	43	40	39	30	29	28
3	78	69	62	57	70	62	57	52	50	46	42	38	35	33	27	25	24
4	71	61	54	48	64	55	49	44	44	40	36	34	31	28	24	22	21
5	66	55	47	41	59	49	43	38	40	35	31	30	27	25	22	20	18
6	60	49	41	36	54	44	38	33	36	31	27	28	24	22	20	18	16
7	56	44	37	31	50	40	34	29	32	28	24	25	22	19	18	16	15
8	52	40	33	28	46	36	30	25	29	25	21	23	20	17	17	15	13
9	48	37	29	25	43	33	27	23	27	22	19	21	18	15	16	13	12
10	45	33	27	22	40	30	24	20	25	20	17	20	16	14	14	12	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	758	758	758
5°	759	746	751
10°	752	732	727
15°	742	708	689
20°	728	675	643
25°	714	638	599
30°	695	600	542
35°	677	559	492
40°	658	516	435
45°	637	469	384
50°	614	421	333
55°	591	370	284
60°	563	317	234
65°	532	263	211
70°	494	212	192
75°	447	188	175
80°	378	158	153
85°	264	107	117

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 983 cd/sqm

TEST NUMBER: P902289

CATALOG NUMBER: DFN2DIP-4P4F0-030D060US830-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	109.5	1.4
10°-20°	300.7	3.8
20°-30°	422.1	5.3
30°-40°	460.2	5.8
40°-50°	422.9	5.3
50°-60°	332.2	4.2
60°-70°	216.2	2.7
70°-80°	111.3	1.4
80°-90°	31.8	0.4
90°-100°	62.9	0.8
100°-110°	234.6	2.9
110°-120°	622.2	7.8
120°-130°	1032.0	12.9
130°-140°	1096.2	13.7
140°-150°	1018.8	12.7
150°-160°	819.1	10.2
160°-170°	527.8	6.6
170°-180°	181.7	2.3
0°-30°	832.3	10.4
0°-40°	1292.5	16.2
0°-60°	2047.6	25.6
0°-90°	2406.8	30.1
90°-120°	919.8	11.5
90°-150°	4066.8	50.8
90°-180°	5595.0	69.9
0°-180°	8002.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1169	1169	1169	1169	1169	
5°	1169	1163	1150	1159	1156	111
15°	1112	1100	1064	1044	1033	313
25°	1009	975	905	862	846	464
35°	869	815	722	656	632	544
45°	711	640	529	454	428	549
55°	540	458	344	280	260	483
65°	365	279	184	148	145	362
75°	194	121	85	77	76	206
85°	45	23	20	20	20	52
90°	1	17	28	35	37	7
95°	90	44	54	61	59	106
105°	420	461	84	99	105	449
115°	794	818	852	213	113	782
125°	1123	1141	1167	1177	1181	1001
135°	1389	1412	1424	1438	1435	1073
145°	1612	1610	1634	1643	1636	1008
155°	1775	1762	1779	1787	1776	818
165°	1870	1862	1866	1876	1866	528
175°	1913	1903	1906	1915	1902	182
180°	1909	1909	1909	1909	1909	

TEST NUMBER: P902289

CATALOG NUMBER: DFN2DIP-4P4F0-030D060US830-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1168.7	1168.7	1168.7	1168.7	1168.7
2.5°	1173.9	1168.7	1157.0	1167.6	1165.5
5°	1168.7	1163.4	1149.6	1159.1	1155.9
7.5°	1159.1	1152.8	1138.0	1142.2	1136.9
10°	1146.4	1139.1	1117.9	1114.7	1108.4
12.5°	1130.6	1121.1	1092.5	1086.2	1074.5
15°	1111.5	1099.9	1063.9	1043.9	1033.3
17.5°	1089.3	1072.4	1027.9	1004.8	987.8
20°	1063.9	1042.7	989.9	963.6	940.2
22.5°	1036.5	1012.1	950.7	914.8	899.0
25°	1009.0	975.1	905.3	862.0	846.0
27.5°	976.2	940.2	863.0	813.3	788.9
30°	941.3	901.1	816.4	762.6	734.0
32.5°	907.4	858.8	772.1	708.6	682.1
35°	869.4	815.4	722.4	655.7	632.4
37.5°	832.4	774.1	675.8	602.8	576.5
40°	793.2	729.8	627.2	552.0	524.6
42.5°	753.0	685.4	578.5	500.2	473.8
45°	710.8	639.8	528.9	453.6	428.3
47.5°	670.5	595.5	481.3	406.0	382.9
50°	626.1	551.0	434.7	361.7	339.5
52.5°	582.7	503.4	390.3	320.5	300.4
55°	540.4	457.9	343.7	280.3	260.2
57.5°	497.1	412.5	302.6	243.3	226.3
60°	452.6	368.1	259.1	205.2	188.3
62.5°	409.3	324.7	222.1	171.4	163.0
65°	364.9	279.2	184.0	148.1	144.9
67.5°	322.6	236.9	148.1	130.1	126.9
70°	278.1	195.7	122.6	112.1	107.8
72.5°	235.8	157.5	102.5	94.2	92.0
75°	194.5	120.6	84.6	77.2	76.2
77.5°	153.4	85.6	66.6	62.4	60.2
80°	115.3	61.4	50.7	46.6	46.6
82.5°	80.3	41.3	34.9	32.8	32.8
85°	45.4	23.2	20.1	20.1	20.1
87.5°	17.0	8.4	8.4	7.4	7.4
90°	1.3	16.6	27.5	34.6	37.2
92.5°	34.6	29.0	33.1	35.9	37.2
95°	89.7	44.1	53.8	60.9	59.4
97.5°	161.6	48.4	70.3	74.6	76.0
100°	244.5	55.2	78.7	89.7	92.5
102.5°	335.5	332.9	81.5	96.6	100.9
105°	419.8	461.3	84.3	99.3	105.0
107.5°	517.9	552.3	87.1	102.2	107.7
110°	611.9	640.7	241.8	103.7	109.1

TEST NUMBER: P902289

CATALOG NUMBER: DFN2DIP-4P4F0-030D060US830-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	700.2	725.0	701.5	106.2	110.6
115°	794.1	817.6	852.2	212.7	113.3
117.5°	875.5	903.1	926.7	729.2	367.3
120°	966.8	987.4	1012.4	1028.9	842.4
122.5°	1044.0	1066.1	1093.8	1102.0	1103.5
125°	1122.8	1140.8	1167.0	1176.7	1180.7
127.5°	1194.6	1213.9	1234.7	1248.5	1249.8
130°	1262.3	1284.4	1299.5	1314.8	1313.4
132.5°	1331.3	1349.3	1364.4	1376.9	1375.5
135°	1389.4	1411.6	1423.8	1437.8	1434.9
137.5°	1450.0	1466.6	1480.5	1494.3	1490.3
140°	1509.4	1520.6	1535.7	1548.1	1541.2
142.5°	1559.2	1569.0	1586.9	1597.8	1590.9
145°	1611.7	1610.2	1633.7	1643.4	1636.5
147.5°	1657.2	1653.0	1676.5	1683.4	1678.0
150°	1701.5	1691.8	1713.9	1722.1	1715.2
152.5°	1738.7	1727.7	1748.3	1756.7	1747.0
155°	1774.6	1762.3	1778.9	1787.1	1776.0
157.5°	1803.6	1792.6	1805.1	1814.8	1803.6
160°	1828.5	1820.1	1828.5	1836.7	1827.1
162.5°	1850.5	1842.3	1849.2	1858.9	1846.4
165°	1869.9	1861.7	1865.8	1875.5	1865.8
167.5°	1885.1	1876.8	1881.0	1890.7	1878.2
170°	1897.6	1889.2	1892.1	1901.7	1889.2
172.5°	1905.8	1897.6	1900.4	1910.1	1897.6
175°	1912.7	1903.0	1905.8	1915.4	1901.7
177.5°	1915.4	1905.8	1907.2	1916.9	1904.5
180°	1908.6	1908.6	1908.6	1908.6	1908.6

TEST NUMBER: P902289

CATALOG NUMBER: DFN2DIP-4P4F0-030D060US830-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	3.98	4.67	5.10	5.78	7.31	0.00	0.63	1.06	1.74	3.27
	3H	5.66	6.27	6.78	7.39	8.94	1.12	1.74	2.25	2.86	4.40
	4H	6.26	6.85	7.40	7.96	9.52	1.57	2.15	2.70	3.27	4.82
	6H	6.68	7.22	7.82	8.34	9.90	1.88	2.42	3.03	3.54	5.11
	8H	6.81	7.32	7.95	8.45	10.01	1.97	2.48	3.12	3.62	5.18
	12H	6.87	7.35	8.01	8.48	10.06	2.01	2.50	3.16	3.62	5.21
4H	2H	3.98	4.57	5.13	5.69	7.24	0.52	1.11	1.67	2.23	3.78
	3H	5.81	6.29	6.95	7.44	9.00	1.86	2.35	3.01	3.49	5.06
	4H	6.50	6.95	7.65	8.08	9.66	2.41	2.86	3.56	3.99	5.57
	6H	7.01	7.39	8.17	8.55	10.12	2.82	3.21	3.98	4.36	5.94
	8H	7.19	7.54	8.34	8.69	10.28	2.95	3.31	4.10	4.45	6.05
	12H	7.28	7.60	8.45	8.76	10.36	3.01	3.33	4.18	4.49	6.09
8H	4H	6.46	6.81	7.61	7.96	9.55	2.68	3.04	3.84	4.18	5.78
	6H	7.02	7.32	8.20	8.51	10.09	3.20	3.49	4.37	4.68	6.27
	8H	7.24	7.50	8.42	8.67	10.28	3.39	3.65	4.57	4.81	6.42
	12H	7.38	7.60	8.56	8.77	10.41	3.51	3.73	4.69	4.89	6.54
12H	4H	6.40	6.73	7.57	7.88	9.48	2.68	3.00	3.85	4.16	5.76
	6H	7.00	7.26	8.18	8.42	10.03	3.25	3.50	4.43	4.67	6.28
	8H	7.22	7.44	8.40	8.61	10.25	3.45	3.68	4.64	4.84	6.49

END OF REPORT