

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P902308

Luminaire Tested: DFN2DIP-4P4F0-040D050US830-RLLFLL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P902308  
REPORT IS A COMBINATION OF REPORTS P899106 AND P895967  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-4P4F0-040D050US830-RLLFLL  
Description: 4 foot, 90deg - 4way Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7375.4 lumens  
Efficiency: N/A  
Efficacy: 93.4 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular w/ Sides (W: 4.07' x L: 4.07' x H: 0.1')  
CIE Type: General Diffuse  
  
Input Watts (W): 79  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9968  
Total Harmonic Distortion (THDi): 0.064  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P902308  
CATALOG NUMBER: DFN2DIP-4P4F0-040D050US830-RLLFLL

### Luminous Intensity Polar Plot

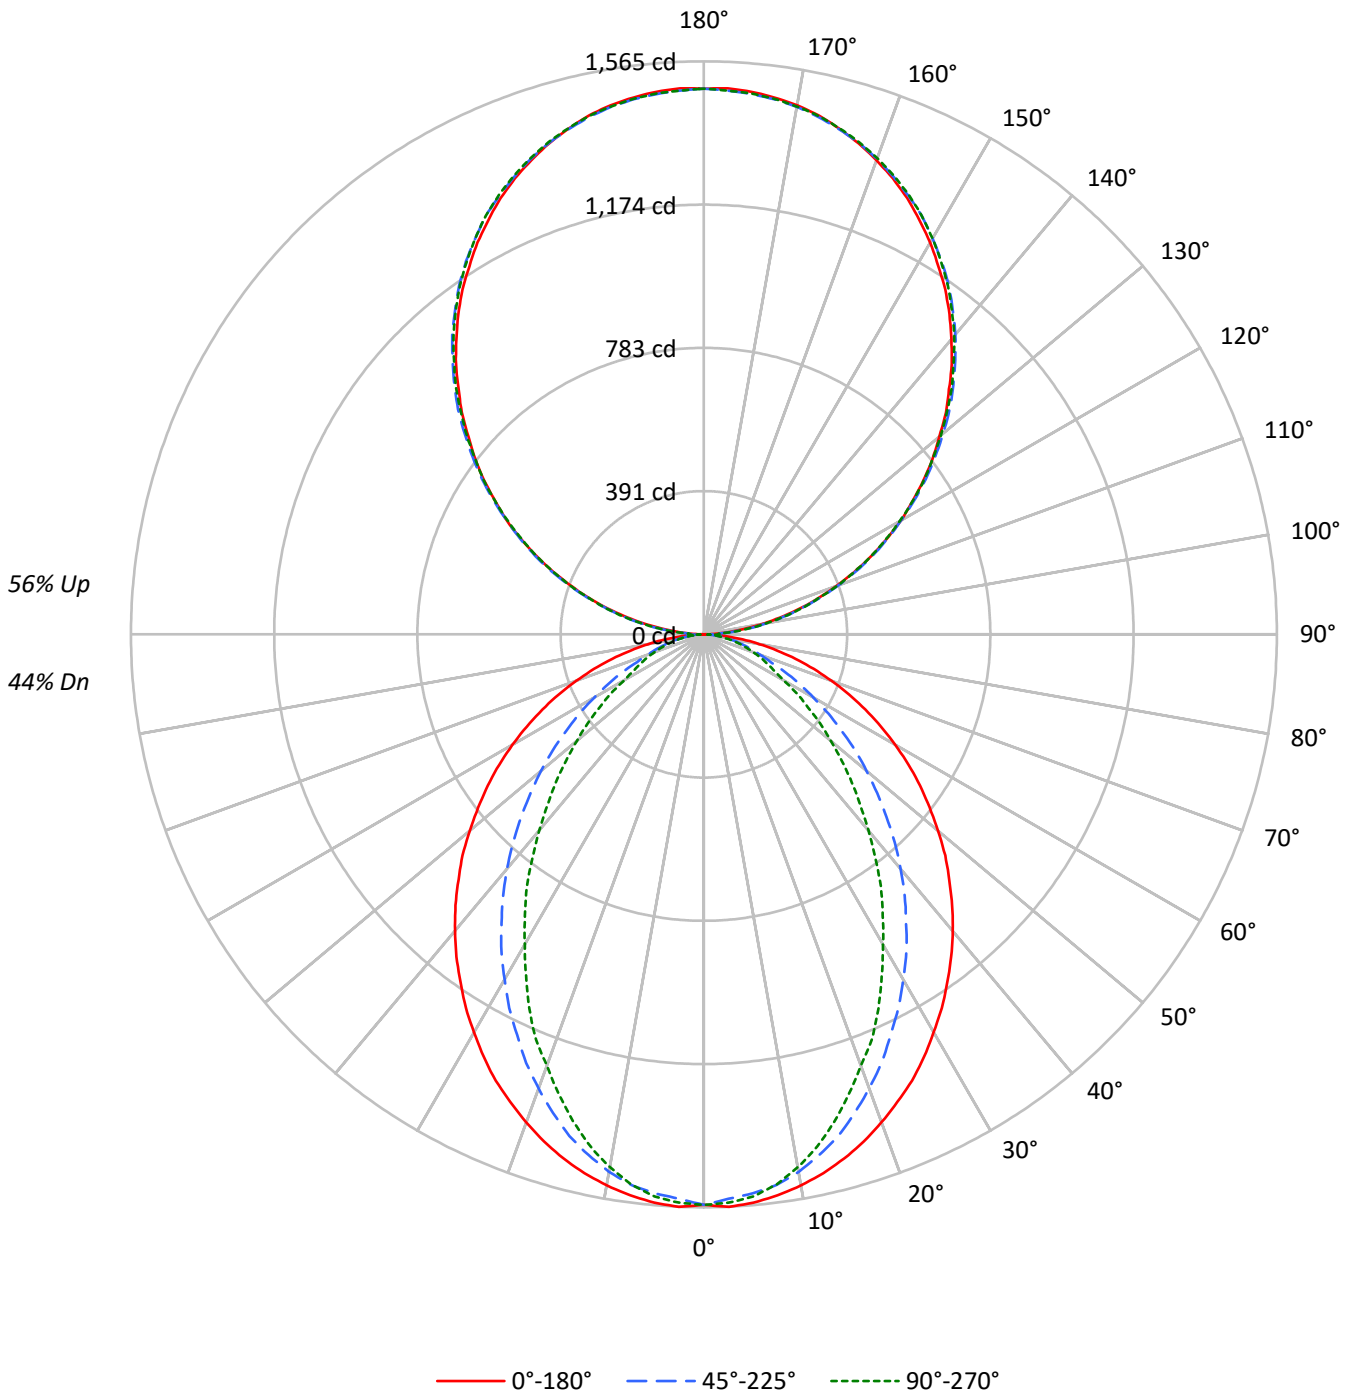



TEST NUMBER: P902308

CATALOG NUMBER: DFN2DIP-4P4F0-040D050US830-RLLFLL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	106	106	106	106	97	97	97	97	80	80	80	64	64	64	50	50	50	44				44
1	97	93	89	86	88	85	82	79	70	68	66	57	56	54	45	44	43	37				37
2	88	81	75	71	81	75	70	65	62	59	55	51	48	46	40	38	37	32				32
3	81	72	65	59	74	66	60	55	55	51	47	45	42	39	36	34	32	28				28
4	74	64	56	50	68	59	52	47	49	44	40	41	37	34	32	30	28	24				24
5	68	57	49	43	62	53	46	41	44	39	35	37	33	30	29	27	25	21				21
6	63	51	43	38	57	47	41	35	40	35	31	33	29	26	27	24	22	19				19
7	58	46	39	33	53	43	36	31	36	31	27	30	26	23	25	22	20	17				17
8	54	42	35	30	50	39	32	28	33	28	24	28	24	21	23	20	18	15				15
9	50	39	31	26	46	36	29	25	31	25	22	26	22	19	21	18	16	14				14
10	47	35	28	24	43	33	27	22	28	23	20	24	20	17	19	17	15	13				13

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1011	1011	1011
5°	1013	995	1002
10°	1003	976	969
15°	989	944	919
20°	971	900	858
25°	952	850	798
30°	927	799	723
35°	903	745	656
40°	878	688	580
45°	849	625	511
50°	819	562	444
55°	787	494	379
60°	751	423	313
65°	709	350	282
70°	659	283	255
75°	596	250	233
80°	504	211	204
85°	352	143	156

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 90°  
 Luminance: 1128 cd/sqm



TEST NUMBER: P902308

CATALOG NUMBER: DFN2DIP-4P4F0-040D050US830-RLLFLL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	146.0	2.0
10°-20°	400.9	5.4
20°-30°	562.8	7.6
30°-40°	613.5	8.3
40°-50°	563.9	7.6
50°-60°	442.9	6.0
60°-70°	288.3	3.9
70°-80°	148.4	2.0
80°-90°	42.1	0.6
90°-100°	92.2	1.3
100°-110°	293.0	4.0
110°-120°	501.5	6.8
120°-130°	659.5	8.9
130°-140°	740.3	10.0
140°-150°	725.9	9.8
150°-160°	609.0	8.3
160°-170°	403.9	5.5
170°-180°	141.2	1.9
0°-30°	1109.8	15.0
0°-40°	1723.3	23.4
0°-60°	2730.1	37.0
0°-90°	3208.9	43.5
90°-120°	886.7	12.0
90°-150°	3012.5	40.8
90°-180°	4167.0	56.5
0°-180°	7375.4	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1558	1558	1558	1558	1558	
5°	1558	1551	1533	1546	1541	148
15°	1482	1466	1419	1392	1378	418
25°	1345	1300	1207	1149	1128	619
35°	1159	1087	963	874	843	726
45°	948	853	705	605	571	732
55°	721	611	458	374	347	644
65°	486	372	245	198	193	482
75°	259	161	113	103	102	274
85°	61	31	27	27	27	70
90°	1	16	44	41	43	7
95°	66	78	80	80	78	73
105°	270	274	277	279	279	285
115°	503	510	508	507	503	498
125°	732	743	740	736	734	654
135°	947	961	963	962	958	732
145°	1149	1158	1166	1167	1162	718
155°	1314	1318	1322	1328	1324	605
165°	1430	1428	1428	1438	1431	403
175°	1488	1484	1482	1490	1483	141
180°	1490	1490	1490	1490	1490	



TEST NUMBER: P902308

CATALOG NUMBER: DFN2DIP-4P4F0-040D050US830-RLLFLL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1558.2	1558.2	1558.2	1558.2	1558.2
2.5°	1565.3	1558.2	1542.7	1556.9	1554.0
5°	1558.2	1551.1	1532.8	1545.5	1541.3
7.5°	1545.5	1537.1	1517.4	1522.9	1515.9
10°	1528.6	1518.7	1490.5	1486.2	1477.9
12.5°	1507.5	1494.8	1456.6	1448.2	1432.7
15°	1482.1	1466.5	1418.6	1391.9	1377.8
17.5°	1452.5	1429.8	1370.6	1339.6	1317.0
20°	1418.6	1390.3	1319.8	1284.7	1253.6
22.5°	1382.0	1349.5	1267.6	1219.7	1198.7
25°	1345.3	1300.1	1207.0	1149.3	1128.0
27.5°	1301.7	1253.6	1150.7	1084.4	1051.9
30°	1255.1	1201.4	1088.5	1016.7	978.6
32.5°	1209.9	1145.0	1029.4	944.8	909.5
35°	1159.2	1087.2	963.2	874.3	843.2
37.5°	1109.8	1032.2	901.1	803.7	768.5
40°	1057.6	973.1	836.2	736.1	699.5
42.5°	1004.0	913.8	771.4	666.9	631.8
45°	947.6	853.1	705.1	604.9	571.1
47.5°	894.1	794.0	641.7	541.5	510.5
50°	834.8	734.7	579.6	482.2	452.7
52.5°	776.9	671.2	520.4	427.3	400.5
55°	720.6	610.6	458.3	373.7	346.9
57.5°	662.8	550.0	403.3	324.3	301.8
60°	603.5	490.7	345.4	273.6	251.1
62.5°	545.8	433.0	296.1	228.5	217.3
65°	486.5	372.2	245.3	197.5	193.1
67.5°	430.2	315.8	197.5	173.4	169.2
70°	370.9	260.9	163.5	149.5	143.7
72.5°	314.5	210.1	136.8	125.5	122.7
75°	259.4	160.7	112.8	102.9	101.6
77.5°	204.5	114.1	88.9	83.2	80.3
80°	153.6	81.8	67.6	62.1	62.1
82.5°	107.2	55.0	46.6	43.6	43.6
85°	60.6	31.0	26.8	26.8	26.8
87.5°	22.6	11.2	11.2	9.9	9.9
90°	1.3	16.2	44.0	41.4	42.7
92.5°	27.9	37.7	39.1	40.4	40.4
95°	65.6	78.2	80.4	80.4	78.2
97.5°	109.1	120.8	125.8	125.8	125.8
100°	159.5	169.8	173.4	173.4	172.1
102.5°	212.5	220.2	225.1	226.5	225.1
105°	270.5	274.1	276.8	279.0	279.0
107.5°	328.0	333.4	333.4	334.3	328.0
110°	383.7	391.0	391.0	391.0	387.3



TEST NUMBER: P902308

CATALOG NUMBER: DFN2DIP-4P4F0-040D050US830-RLLFLL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	443.9	451.6	450.3	446.7	443.9
115°	503.2	510.5	508.2	506.9	503.2
117.5°	562.1	572.0	565.7	562.1	558.6
120°	621.4	631.3	621.4	621.4	617.4
122.5°	675.3	688.0	681.6	678.1	675.3
125°	732.0	743.2	739.6	735.6	734.2
127.5°	787.2	801.2	796.3	790.8	787.2
130°	839.0	855.1	852.8	850.2	845.2
132.5°	896.9	909.5	910.4	904.1	900.5
135°	946.8	960.6	963.4	962.1	958.5
137.5°	1002.5	1013.7	1016.0	1015.0	1009.7
140°	1051.4	1062.7	1068.9	1068.9	1064.0
142.5°	1101.7	1113.0	1116.6	1117.9	1113.0
145°	1149.4	1158.4	1165.5	1167.0	1162.0
147.5°	1192.1	1203.3	1208.7	1211.0	1206.0
150°	1236.1	1243.8	1248.7	1252.7	1248.7
152.5°	1275.3	1282.9	1289.1	1294.1	1289.1
155°	1314.3	1317.9	1321.9	1328.2	1324.2
157.5°	1348.0	1350.7	1352.9	1362.0	1355.7
160°	1378.1	1380.8	1382.1	1389.8	1384.4
162.5°	1406.0	1406.0	1407.3	1415.9	1409.6
165°	1429.8	1428.4	1428.4	1437.5	1431.2
167.5°	1451.3	1447.3	1447.3	1456.3	1450.0
170°	1467.5	1464.0	1462.6	1471.6	1464.0
172.5°	1478.8	1475.2	1473.9	1482.8	1475.2
175°	1487.8	1484.1	1481.5	1490.4	1482.8
177.5°	1492.7	1489.1	1486.4	1494.0	1486.4
180°	1490.4	1490.4	1490.4	1490.4	1490.4



TEST NUMBER: P902308  
 CATALOG NUMBER: DFN2DIP-4P4F0-040D050US830-RLFL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.56	7.34	7.58	8.37	9.73	2.52	3.30	3.54	4.33	5.69
	3H	8.24	8.94	9.27	9.97	11.36	3.71	4.41	4.74	5.44	6.82
	4H	8.85	9.51	9.89	10.55	11.94	4.16	4.82	5.20	5.85	7.24
	6H	9.28	9.88	10.33	10.92	12.33	4.48	5.09	5.53	6.12	7.53
	8H	9.40	9.98	10.46	11.04	12.43	4.57	5.15	5.62	6.20	7.60
	12H	9.47	10.02	10.53	11.06	12.49	4.61	5.16	5.67	6.21	7.63
4H	2H	6.58	7.24	7.62	8.27	9.66	3.12	3.78	4.16	4.81	6.20
	3H	8.41	8.96	9.46	10.02	11.42	4.46	5.01	5.52	6.07	7.48
	4H	9.10	9.60	10.16	10.66	12.08	5.01	5.51	6.07	6.57	7.99
	6H	9.62	10.05	10.69	11.13	12.55	5.43	5.86	6.50	6.94	8.36
	8H	9.80	10.20	10.87	11.27	12.70	5.56	5.96	6.63	7.03	8.47
	12H	9.89	10.26	10.98	11.34	12.78	5.62	5.99	6.71	7.07	8.51
8H	4H	9.07	9.47	10.14	10.54	11.97	5.29	5.69	6.36	6.76	8.20
	6H	9.64	9.97	10.73	11.08	12.51	5.81	6.14	6.90	7.25	8.69
	8H	9.86	10.15	10.96	11.24	12.69	6.00	6.29	7.10	7.39	8.84
	12H	10.00	10.25	11.10	11.34	12.84	6.12	6.38	7.22	7.47	8.96
12H	4H	9.02	9.38	10.10	10.46	11.90	5.29	5.66	6.38	6.74	8.18
	6H	9.61	9.90	10.71	11.00	12.45	5.86	6.15	6.96	7.25	8.70
	8H	9.83	10.09	10.94	11.18	12.67	6.07	6.33	7.17	7.42	8.91