

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P902350

Luminaire Tested: DFN2DIP-4P4F0-060D040US830-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P902350
REPORT IS A COMBINATION OF REPORTS P899097 AND P895967
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P4F0-060D040US830-FLLFLL
Description: 4 foot, 90deg - 4way Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8935.3 lumens
Efficiency: N/A
Efficacy: 96.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 4.07' x L: 4.07' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 92.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P902350

CATALOG NUMBER: DFN2DIP-4P4F0-060D040US830-FLLFLL

Luminous Intensity Polar Plot

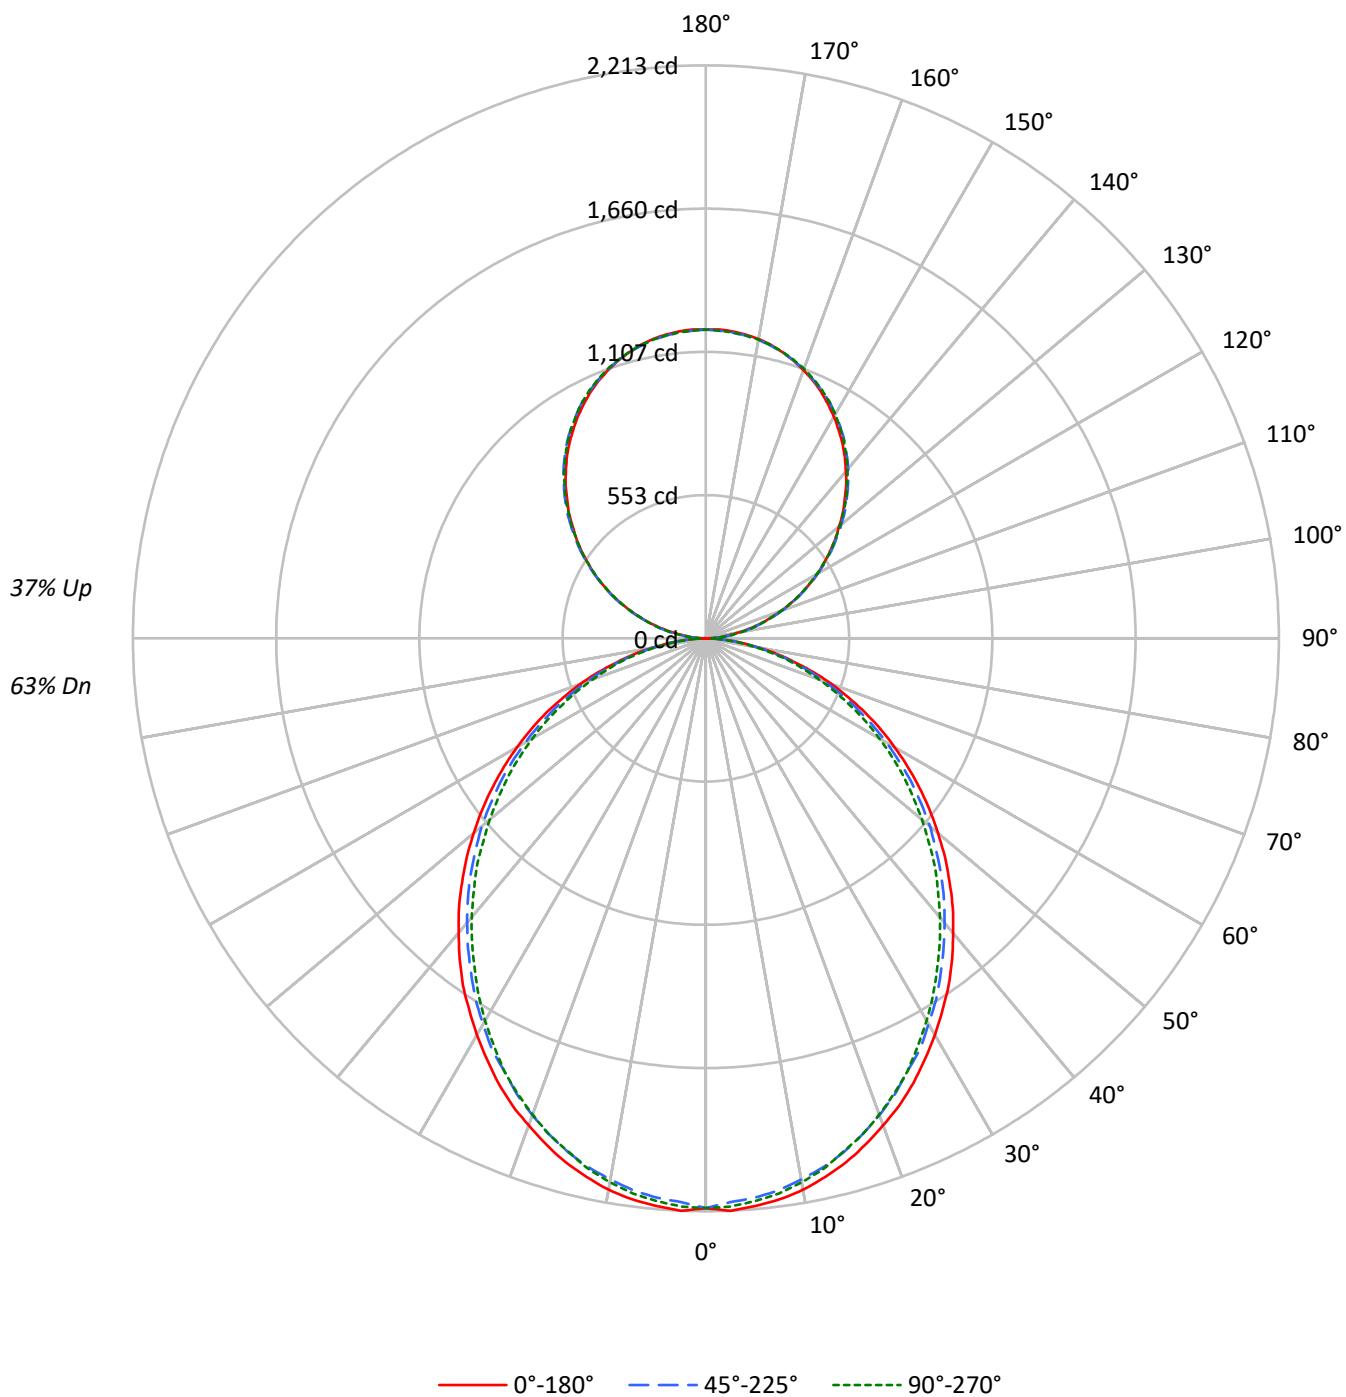

TEST NUMBER: P902350

CATALOG NUMBER: DFN2DIP-4P4F0-060D040US830-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	110	110	110	110	103	103	103	103	90	90	90	79	79	79	68	68	68
1	101	96	92	89	94	90	87	84	79	77	74	69	67	66	60	59	57
2	92	84	78	72	86	79	73	69	70	65	62	61	58	55	53	50	48
3	84	74	66	60	78	70	63	58	61	56	52	54	50	46	47	44	41
4	77	66	57	51	71	62	54	49	55	49	44	48	43	40	42	38	35
5	70	58	50	44	66	55	48	42	49	43	38	43	38	35	38	34	31
6	65	53	44	38	61	50	42	37	44	38	33	39	34	30	34	30	27
7	60	48	39	34	56	45	38	32	40	34	30	36	31	27	31	27	24
8	56	43	35	30	52	41	34	29	37	31	26	33	28	24	29	25	22
9	52	40	32	27	49	38	30	26	34	28	24	30	25	22	27	23	20
10	49	36	29	24	46	35	28	23	31	25	21	28	23	20	25	21	18

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1428	1428	1428
5°	1430	1408	1418
10°	1418	1390	1399
15°	1398	1367	1370
20°	1370	1336	1339
25°	1342	1298	1304
30°	1307	1263	1260
35°	1274	1222	1212
40°	1233	1180	1168
45°	1192	1139	1122
50°	1147	1095	1069
55°	1101	1044	1020
60°	1048	984	964
65°	991	922	898
70°	917	846	827
75°	816	756	763
80°	694	641	638
85°	503	440	431

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 1192 cd/sqm

TEST NUMBER: P902350

CATALOG NUMBER: DFN2DIP-4P4F0-060D040US830-FLLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	207.1	2.3
10°-20°	582.7	6.5
20°-30°	856.4	9.6
30°-40°	994.6	11.1
40°-50°	993.4	11.1
50°-60°	866.2	9.7
60°-70°	640.3	7.2
70°-80°	362.3	4.1
80°-90°	99.0	1.1
90°-100°	73.8	0.8
100°-110°	234.4	2.6
110°-120°	401.2	4.5
120°-130°	527.6	5.9
130°-140°	592.2	6.6
140°-150°	580.8	6.5
150°-160°	487.2	5.5
160°-170°	323.1	3.6
170°-180°	112.9	1.3
0°-30°	1646.2	18.4
0°-40°	2640.9	29.6
0°-60°	4500.5	50.4
0°-90°	5602.1	62.7
90°-120°	709.4	7.9
90°-150°	2410.0	27.0
90°-180°	3333.0	37.3
0°-180°	8935.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2200	2200	2200	2200	2200	
5°	2200	2192	2169	2186	2182	209
15°	2095	2082	2055	2063	2053	590
25°	1896	1879	1843	1847	1843	872
35°	1636	1615	1581	1568	1557	1021
45°	1331	1316	1284	1261	1253	1027
55°	1007	994	969	944	933	901
65°	679	667	646	626	616	672
75°	355	351	340	328	332	379
85°	87	85	83	76	74	97
90°	1	13	35	33	34	9
95°	52	63	64	64	63	58
105°	216	219	221	223	223	228
115°	403	408	406	406	403	398
125°	586	595	592	588	587	523
135°	757	768	771	770	767	585
145°	920	927	932	934	930	575
155°	1051	1054	1058	1063	1059	484
165°	1144	1143	1143	1150	1145	323
175°	1190	1187	1185	1192	1186	113
180°	1192	1192	1192	1192	1192	

TEST NUMBER: P902350

CATALOG NUMBER: DFN2DIP-4P4F0-060D040US830-FLLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2200.5	2200.5	2200.5	2200.5	2200.5
2.5°	2213.3	2202.7	2179.3	2200.5	2196.4
5°	2200.5	2192.2	2168.8	2185.7	2181.6
7.5°	2185.7	2173.1	2149.8	2166.8	2162.6
10°	2162.6	2147.8	2122.3	2139.2	2132.9
12.5°	2130.7	2118.1	2092.7	2103.3	2099.0
15°	2094.7	2082.2	2054.6	2063.1	2052.6
17.5°	2050.3	2037.8	2010.2	2020.6	2010.2
20°	2001.6	1989.0	1959.4	1965.7	1957.4
22.5°	1953.1	1934.0	1906.4	1906.4	1902.1
25°	1895.8	1879.1	1843.0	1847.1	1843.0
27.5°	1832.3	1817.5	1790.1	1783.9	1773.3
30°	1769.1	1751.9	1720.3	1714.0	1705.4
32.5°	1701.2	1688.7	1654.7	1641.9	1633.4
35°	1635.7	1614.6	1580.6	1567.8	1557.3
37.5°	1561.6	1542.5	1508.6	1493.7	1483.2
40°	1485.4	1468.4	1434.5	1415.7	1407.1
42.5°	1411.4	1394.3	1360.7	1339.4	1326.7
45°	1331.1	1316.2	1284.3	1261.2	1252.6
47.5°	1252.6	1237.8	1204.0	1180.6	1168.0
50°	1170.1	1159.5	1129.9	1100.2	1089.7
52.5°	1089.7	1074.9	1047.4	1024.2	1009.4
55°	1007.3	994.5	969.1	943.8	933.2
57.5°	924.7	914.2	886.6	861.2	852.6
60°	842.1	833.8	804.2	780.8	774.5
62.5°	761.7	746.9	725.8	704.6	696.2
65°	679.3	666.6	645.5	626.3	615.8
67.5°	594.6	583.9	565.1	550.3	541.7
70°	516.3	507.8	488.7	473.9	465.6
72.5°	435.9	427.4	416.9	402.1	395.8
75°	355.3	351.4	340.5	328.0	332.2
77.5°	283.5	275.0	270.7	264.5	258.2
80°	211.7	209.4	205.2	198.9	194.6
82.5°	143.9	143.9	141.9	133.4	133.4
85°	86.6	84.6	82.6	76.1	74.1
87.5°	38.2	33.9	29.6	23.4	21.1
90°	1.0	12.9	35.3	33.1	34.1
92.5°	22.2	30.2	31.3	32.3	32.3
95°	52.5	62.6	64.4	64.4	62.6
97.5°	87.4	96.7	100.7	100.7	100.7
100°	127.6	135.9	138.7	138.7	137.7
102.5°	170.0	176.2	180.1	181.2	180.1
105°	216.4	219.2	221.4	223.2	223.2
107.5°	262.4	266.7	266.7	267.4	262.4
110°	307.0	312.7	312.7	312.7	309.9

TEST NUMBER: P902350

CATALOG NUMBER: DFN2DIP-4P4F0-060D040US830-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	355.1	361.3	360.1	357.3	355.1
115°	402.6	408.4	406.5	405.5	402.6
117.5°	449.7	457.6	452.6	449.7	446.9
120°	497.2	505.0	497.2	497.2	493.9
122.5°	540.3	550.4	545.4	542.4	540.3
125°	585.6	594.6	591.7	588.4	587.4
127.5°	629.8	640.9	637.0	632.6	629.8
130°	671.1	684.1	682.3	680.1	676.2
132.5°	717.5	727.5	728.3	723.2	720.4
135°	757.4	768.5	770.7	769.6	766.8
137.5°	802.0	811.0	812.8	812.0	807.8
140°	841.1	850.2	855.2	855.2	851.2
142.5°	881.5	890.4	893.2	894.4	890.4
145°	919.5	926.7	932.5	933.6	929.6
147.5°	953.7	962.6	967.0	968.7	964.8
150°	988.9	995.0	999.0	1002.2	999.0
152.5°	1020.2	1026.2	1031.3	1035.3	1031.3
155°	1051.4	1054.3	1057.5	1062.6	1059.3
157.5°	1078.5	1080.5	1082.3	1089.6	1084.5
160°	1102.5	1104.7	1105.7	1111.8	1107.5
162.5°	1124.7	1124.7	1125.9	1132.7	1127.7
165°	1143.9	1142.7	1142.7	1149.9	1144.9
167.5°	1161.1	1157.8	1157.8	1165.1	1160.0
170°	1174.0	1171.1	1170.1	1177.2	1171.1
172.5°	1183.0	1180.2	1179.0	1186.3	1180.2
175°	1190.2	1187.3	1185.2	1192.3	1186.3
177.5°	1194.2	1191.3	1189.1	1195.2	1189.1
180°	1192.3	1192.3	1192.3	1192.3	1192.3

TEST NUMBER: P902350

CATALOG NUMBER: DFN2DIP-4P4F0-060D040US830-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.62	10.61	10.46	11.47	12.55	9.18	10.17	10.02	11.03	12.11
	3H	11.30	12.19	12.15	13.06	14.16	10.81	11.69	11.66	12.57	13.67
	4H	11.89	12.73	12.76	13.61	14.73	11.40	12.24	12.27	13.12	14.23
	6H	12.31	13.08	13.19	13.96	15.09	11.81	12.58	12.69	13.46	14.59
	8H	12.42	13.15	13.31	14.06	15.18	11.91	12.65	12.80	13.55	14.68
	12H	12.47	13.17	13.37	14.07	15.22	11.96	12.66	12.86	13.56	14.71
4H	2H	10.10	10.94	10.97	11.82	12.93	9.75	10.58	10.62	11.46	12.58
	3H	11.98	12.68	12.87	13.59	14.72	11.58	12.28	12.46	13.19	14.32
	4H	12.71	13.35	13.60	14.25	15.41	12.28	12.92	13.18	13.83	14.98
	6H	13.23	13.79	14.15	14.72	15.87	12.80	13.35	13.71	14.28	15.44
	8H	13.39	13.91	14.30	14.83	16.00	12.95	13.47	13.87	14.39	15.57
	12H	13.47	13.94	14.41	14.88	16.06	13.02	13.49	13.96	14.43	15.61
8H	4H	12.91	13.43	13.83	14.35	15.53	12.54	13.05	13.45	13.98	15.15
	6H	13.56	13.98	14.50	14.95	16.12	13.17	13.60	14.12	14.57	15.74
	8H	13.78	14.16	14.73	15.12	16.31	13.39	13.77	14.34	14.73	15.92
	12H	13.92	14.26	14.88	15.21	16.45	13.51	13.85	14.47	14.80	16.04
12H	4H	12.91	13.37	13.84	14.31	15.49	12.54	13.00	13.47	13.95	15.12
	6H	13.59	13.97	14.54	14.93	16.11	13.22	13.60	14.17	14.55	15.74
	8H	13.84	14.17	14.80	15.12	16.36	13.46	13.79	14.42	14.75	15.98