

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P902360

Luminaire Tested: DFN2DIP-4P4F0-060D060US830-RLFL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P902360
REPORT IS A COMBINATION OF REPORTS P899122 AND P895967
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P4F0-060D060US830-RLLFLL
Description: 4 foot, 90deg - 4way Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 9811.8 lumens
Efficiency: N/A
Efficacy: 87.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 4.07' x L: 4.07' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 111.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P902360

CATALOG NUMBER: DFN2DIP-4P4F0-060D060US830-RLLFLL

Luminous Intensity Polar Plot

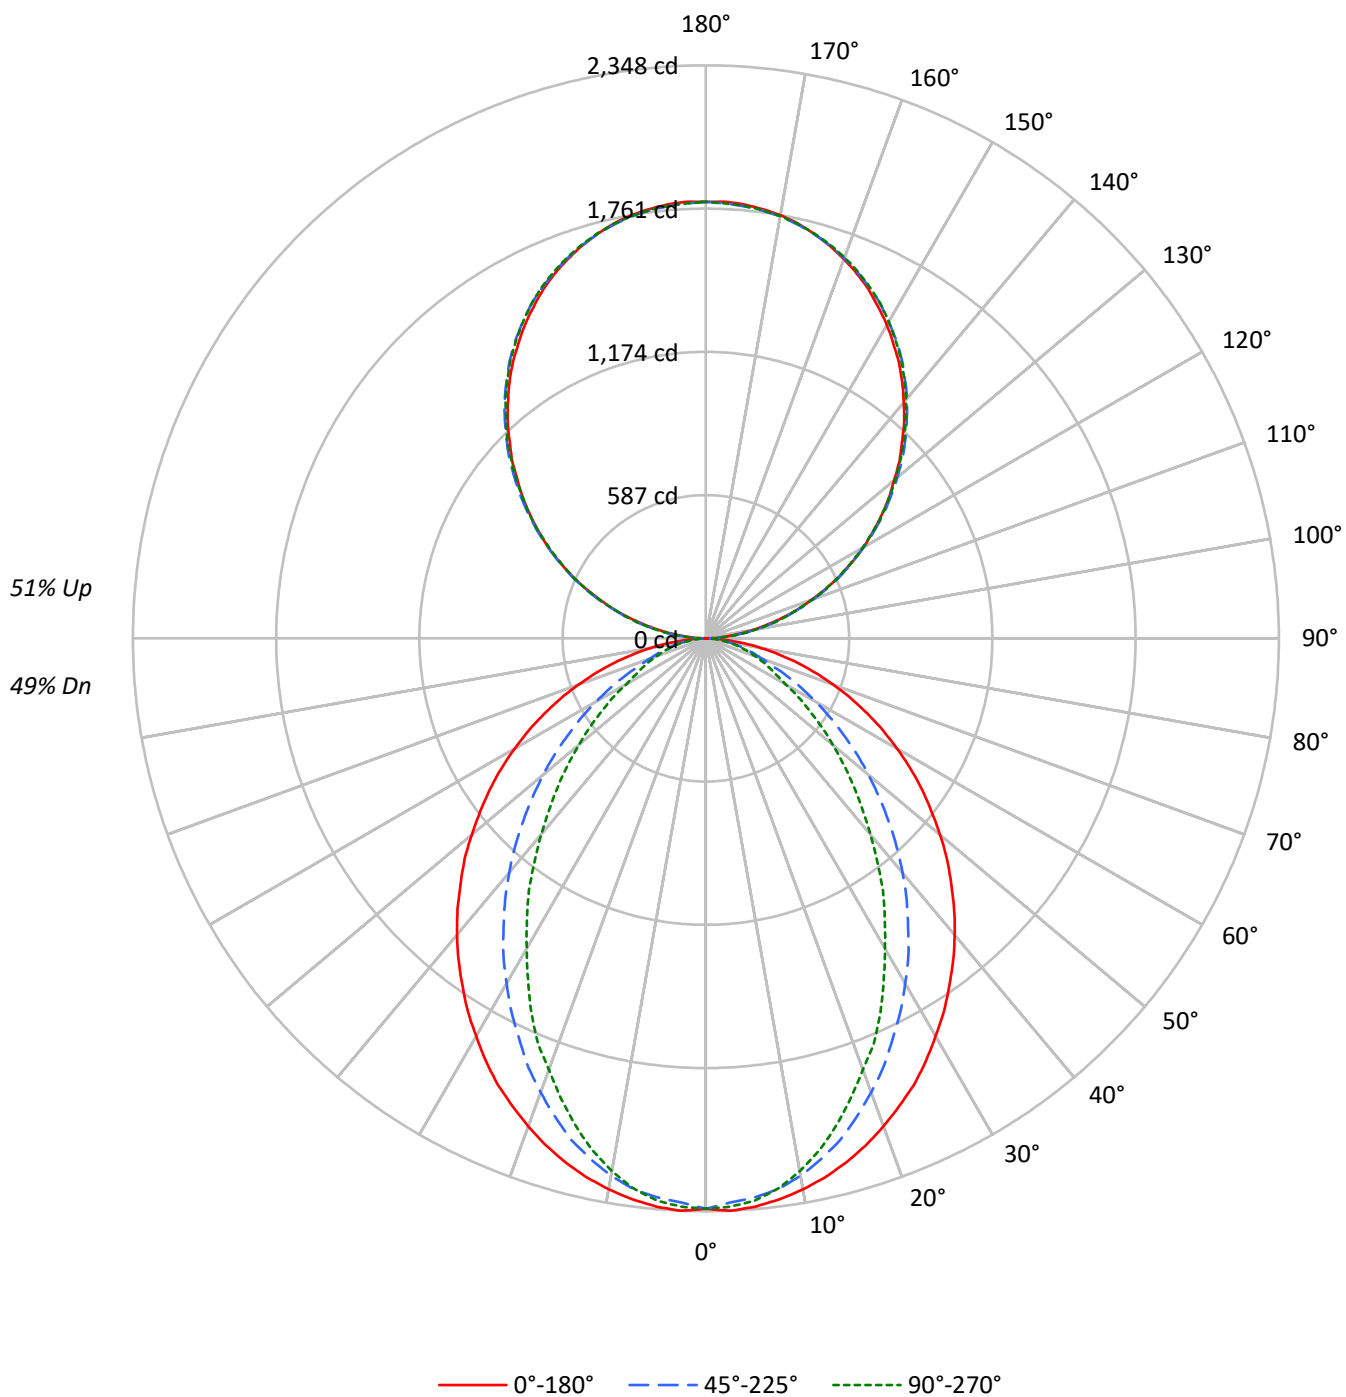

TEST NUMBER: P902360

CATALOG NUMBER: DFN2DIP-4P4F0-060D060US830-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	107	107	107	107	99	99	99	99	83	83	83	68	68	68	55	55	55
1	98	94	90	87	90	87	84	81	73	71	69	61	59	58	50	49	48
2	90	83	77	72	82	76	71	67	65	61	58	54	51	49	44	42	41
3	82	73	66	60	75	68	61	57	58	53	49	48	45	42	40	37	35
4	75	65	57	51	69	60	54	48	51	46	42	43	40	36	36	33	31
5	69	58	50	44	64	54	47	42	46	41	37	39	35	32	32	29	27
6	64	52	44	39	59	49	42	37	42	36	32	35	31	28	30	26	24
7	59	47	40	34	55	44	37	32	38	33	29	32	28	25	27	24	22
8	55	43	36	30	51	40	33	29	35	29	26	30	26	23	25	22	20
9	51	39	32	27	47	37	30	26	32	27	23	27	23	20	23	20	18
10	48	36	29	24	44	34	28	23	30	24	21	25	21	19	22	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1516	1516	1516
5°	1519	1493	1502
10°	1504	1464	1454
15°	1483	1416	1379
20°	1456	1350	1287
25°	1428	1275	1198
30°	1391	1199	1084
35°	1354	1117	985
40°	1316	1032	871
45°	1273	938	767
50°	1228	843	666
55°	1181	741	569
60°	1127	634	469
65°	1064	526	422
70°	989	425	383
75°	894	375	350
80°	756	317	305
85°	528	214	234

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1353 cd/sqm

TEST NUMBER: P902360

CATALOG NUMBER: DFN2DIP-4P4F0-060D060US830-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	219.1	2.2
10°-20°	601.3	6.1
20°-30°	844.3	8.6
30°-40°	920.3	9.4
40°-50°	845.9	8.6
50°-60°	664.3	6.8
60°-70°	432.4	4.4
70°-80°	222.6	2.3
80°-90°	61.9	0.6
90°-100°	110.7	1.1
100°-110°	351.6	3.6
110°-120°	601.8	6.1
120°-130°	791.4	8.1
130°-140°	888.4	9.1
140°-150°	871.1	8.9
150°-160°	730.8	7.4
160°-170°	484.6	4.9
170°-180°	169.4	1.7
0°-30°	1664.7	17.0
0°-40°	2585.0	26.3
0°-60°	4095.1	41.7
0°-90°	4812.0	49.0
90°-120°	1064.1	10.8
90°-150°	3615.0	36.8
90°-180°	5000.0	51.0
0°-180°	9811.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2337	2337	2337	2337	2337	
5°	2337	2327	2299	2318	2312	222
15°	2223	2200	2128	2088	2067	626
25°	2018	1950	1811	1724	1692	928
35°	1739	1631	1445	1312	1265	1088
45°	1421	1280	1058	907	857	1098
55°	1081	916	687	561	520	966
65°	730	558	368	296	290	724
75°	389	241	169	154	152	412
85°	91	46	40	40	40	104
90°	2	19	53	50	51	10
95°	79	94	96	96	94	88
105°	325	329	332	335	335	343
115°	604	613	610	608	604	597
125°	878	892	888	883	881	785
135°	1136	1153	1156	1154	1150	878
145°	1379	1390	1399	1400	1394	862
155°	1577	1582	1586	1594	1589	726
165°	1716	1714	1714	1725	1717	484
175°	1785	1781	1778	1789	1779	170
180°	1789	1789	1789	1789	1789	

TEST NUMBER: P902360

CATALOG NUMBER: DFN2DIP-4P4F0-060D060US830-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2337.3	2337.3	2337.3	2337.3	2337.3
2.5°	2347.9	2337.3	2313.9	2335.2	2331.0
5°	2337.3	2326.8	2299.1	2318.3	2312.0
7.5°	2318.3	2305.6	2276.1	2284.3	2273.8
10°	2292.8	2278.0	2235.9	2229.4	2216.8
12.5°	2261.3	2242.1	2184.9	2172.4	2149.0
15°	2223.1	2199.7	2127.9	2087.7	2066.6
17.5°	2178.7	2144.8	2055.9	2009.4	1975.6
20°	2127.9	2085.5	1979.8	1927.0	1880.4
22.5°	2072.9	2024.2	1901.5	1829.7	1798.0
25°	2018.0	1950.2	1810.6	1724.0	1692.1
27.5°	1952.5	1880.4	1726.0	1626.5	1577.9
30°	1882.6	1802.0	1632.9	1525.1	1467.9
32.5°	1814.9	1717.5	1544.3	1417.2	1364.2
35°	1738.8	1630.9	1444.8	1311.5	1264.8
37.5°	1664.7	1548.2	1351.7	1205.6	1152.8
40°	1586.4	1459.6	1254.2	1104.1	1049.1
42.5°	1506.1	1370.7	1157.1	1000.4	947.7
45°	1421.4	1279.6	1057.7	907.3	856.6
47.5°	1341.1	1191.0	962.5	812.2	765.7
50°	1252.3	1102.1	869.4	723.3	679.1
52.5°	1165.4	1006.7	780.5	640.9	600.8
55°	1080.8	915.9	687.4	560.6	520.4
57.5°	994.2	824.9	605.0	486.5	452.6
60°	905.3	736.1	518.2	410.5	376.5
62.5°	818.7	649.5	444.1	342.7	325.8
65°	729.8	558.4	368.1	296.2	289.7
67.5°	645.2	473.7	296.2	260.1	253.8
70°	556.3	391.3	245.2	224.2	215.7
72.5°	471.7	315.1	205.1	188.3	184.0
75°	389.2	241.0	169.2	154.4	152.4
77.5°	306.8	171.3	133.3	124.8	120.6
80°	230.5	122.7	101.4	93.1	93.1
82.5°	160.7	82.6	69.7	65.5	65.5
85°	90.9	46.5	40.2	40.2	40.2
87.5°	33.9	16.9	16.9	14.8	14.8
90°	1.6	19.4	52.9	49.6	51.2
92.5°	33.5	45.3	46.9	48.5	48.5
95°	78.7	93.8	96.5	96.5	93.8
97.5°	131.0	145.1	151.0	151.0	151.0
100°	191.4	203.8	208.1	208.1	206.5
102.5°	255.1	264.2	270.1	271.7	270.1
105°	324.6	328.9	332.2	334.9	334.9
107.5°	393.6	400.1	400.1	401.1	393.6
110°	460.5	469.1	469.1	469.1	464.8



TEST NUMBER: P902360

CATALOG NUMBER: DFN2DIP-4P4F0-060D060US830-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	532.7	541.9	540.3	535.9	532.7
115°	603.9	612.6	609.8	608.2	603.9
117.5°	674.6	686.5	678.8	674.6	670.2
120°	745.7	757.6	745.7	745.7	740.8
122.5°	810.4	825.5	817.9	813.7	810.4
125°	878.4	891.8	887.5	882.7	881.1
127.5°	944.7	961.4	955.5	949.0	944.7
130°	1006.7	1026.1	1023.4	1020.2	1014.3
132.5°	1076.3	1091.4	1092.4	1084.9	1080.5
135°	1136.1	1152.8	1156.0	1154.4	1150.1
137.5°	1203.0	1216.4	1219.2	1218.0	1211.6
140°	1261.8	1275.3	1282.8	1282.8	1276.9
142.5°	1322.1	1335.6	1339.9	1341.5	1335.6
145°	1379.3	1390.1	1398.7	1400.3	1394.4
147.5°	1430.5	1444.0	1450.5	1453.1	1447.2
150°	1483.4	1492.5	1498.5	1503.3	1498.5
152.5°	1530.2	1539.5	1547.0	1552.9	1547.0
155°	1577.2	1581.5	1586.3	1593.9	1589.0
157.5°	1617.6	1620.9	1623.5	1634.4	1626.8
160°	1653.8	1657.0	1658.6	1667.7	1661.3
162.5°	1687.2	1687.2	1688.8	1699.0	1691.5
165°	1715.7	1714.1	1714.1	1724.9	1717.4
167.5°	1741.6	1736.8	1736.8	1747.6	1740.0
170°	1761.0	1756.7	1755.1	1765.9	1756.7
172.5°	1774.5	1770.2	1768.6	1779.3	1770.2
175°	1785.3	1781.0	1777.7	1788.6	1779.3
177.5°	1791.2	1787.0	1783.7	1792.8	1783.7
180°	1788.6	1788.6	1788.6	1788.6	1788.6

TEST NUMBER: P902360

CATALOG NUMBER: DFN2DIP-4P4F0-060D060US830-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.52	9.34	9.49	10.32	11.61	4.48	5.30	5.45	6.28	7.57
	3H	10.20	10.94	11.19	11.93	13.24	5.67	6.41	6.65	7.40	8.71
	4H	10.81	11.51	11.81	12.50	13.82	6.12	6.82	7.12	7.81	9.13
	6H	11.24	11.88	12.25	12.88	14.21	6.44	7.08	7.45	8.08	9.41
	8H	11.37	11.98	12.38	12.99	14.32	6.54	7.14	7.55	8.16	9.49
	12H	11.43	12.01	12.45	13.02	14.37	6.58	7.16	7.60	8.17	9.52
4H	2H	8.54	9.23	9.54	10.23	11.55	5.08	5.77	6.08	6.77	8.09
	3H	10.37	10.95	11.38	11.97	13.30	6.43	7.01	7.44	8.03	9.36
	4H	11.07	11.60	12.09	12.61	13.97	6.98	7.51	8.00	8.52	9.88
	6H	11.59	12.04	12.62	13.08	14.43	7.40	7.85	8.43	8.89	10.24
	8H	11.77	12.19	12.80	13.22	14.59	7.53	7.95	8.56	8.99	10.35
	12H	11.87	12.25	12.91	13.29	14.67	7.60	7.98	8.64	9.03	10.40
8H	4H	11.04	11.46	12.07	12.49	13.86	7.26	7.69	8.29	8.72	10.08
	6H	11.61	11.96	12.66	13.03	14.40	7.78	8.13	8.84	9.21	10.57
	8H	11.83	12.14	12.89	13.20	14.58	7.98	8.28	9.04	9.34	10.72
	12H	11.97	12.24	13.04	13.30	14.72	8.10	8.37	9.16	9.42	10.85
12H	4H	10.99	11.37	12.04	12.42	13.79	7.27	7.65	8.32	8.70	10.07
	6H	11.58	11.89	12.65	12.95	14.33	7.83	8.14	8.90	9.20	10.58
	8H	11.81	12.08	12.87	13.13	14.56	8.05	8.32	9.11	9.37	10.80