

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P905058

Luminaire Tested: DFN2DIP-4P4F0-050D050US835-FLLFLL

Issue Date: 11/21/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P905058  
REPORT IS A COMBINATION OF REPORTS P899107 AND P895967  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-4P4F0-050D050US835-FLLFLL  
Description: 4 foot, 90deg - 4way Define Geo, with Direct Frosted Lens, Indirect Frosted Lens  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 9375.0 lumens  
Efficiency: N/A  
Efficacy: 103.8 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29  
Luminous Opening: Rectangular w/ Sides (W: 4.07' x L: 4.07' x H: 0.1')  
CIE Type: General Diffuse

Input Watts (W): 90.3  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9951  
Total Harmonic Distortion (THDi): 0.07  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P905058  
CATALOG NUMBER: DFN2DIP-4P4F0-050D050US835-FLLFLL

### Luminous Intensity Polar Plot

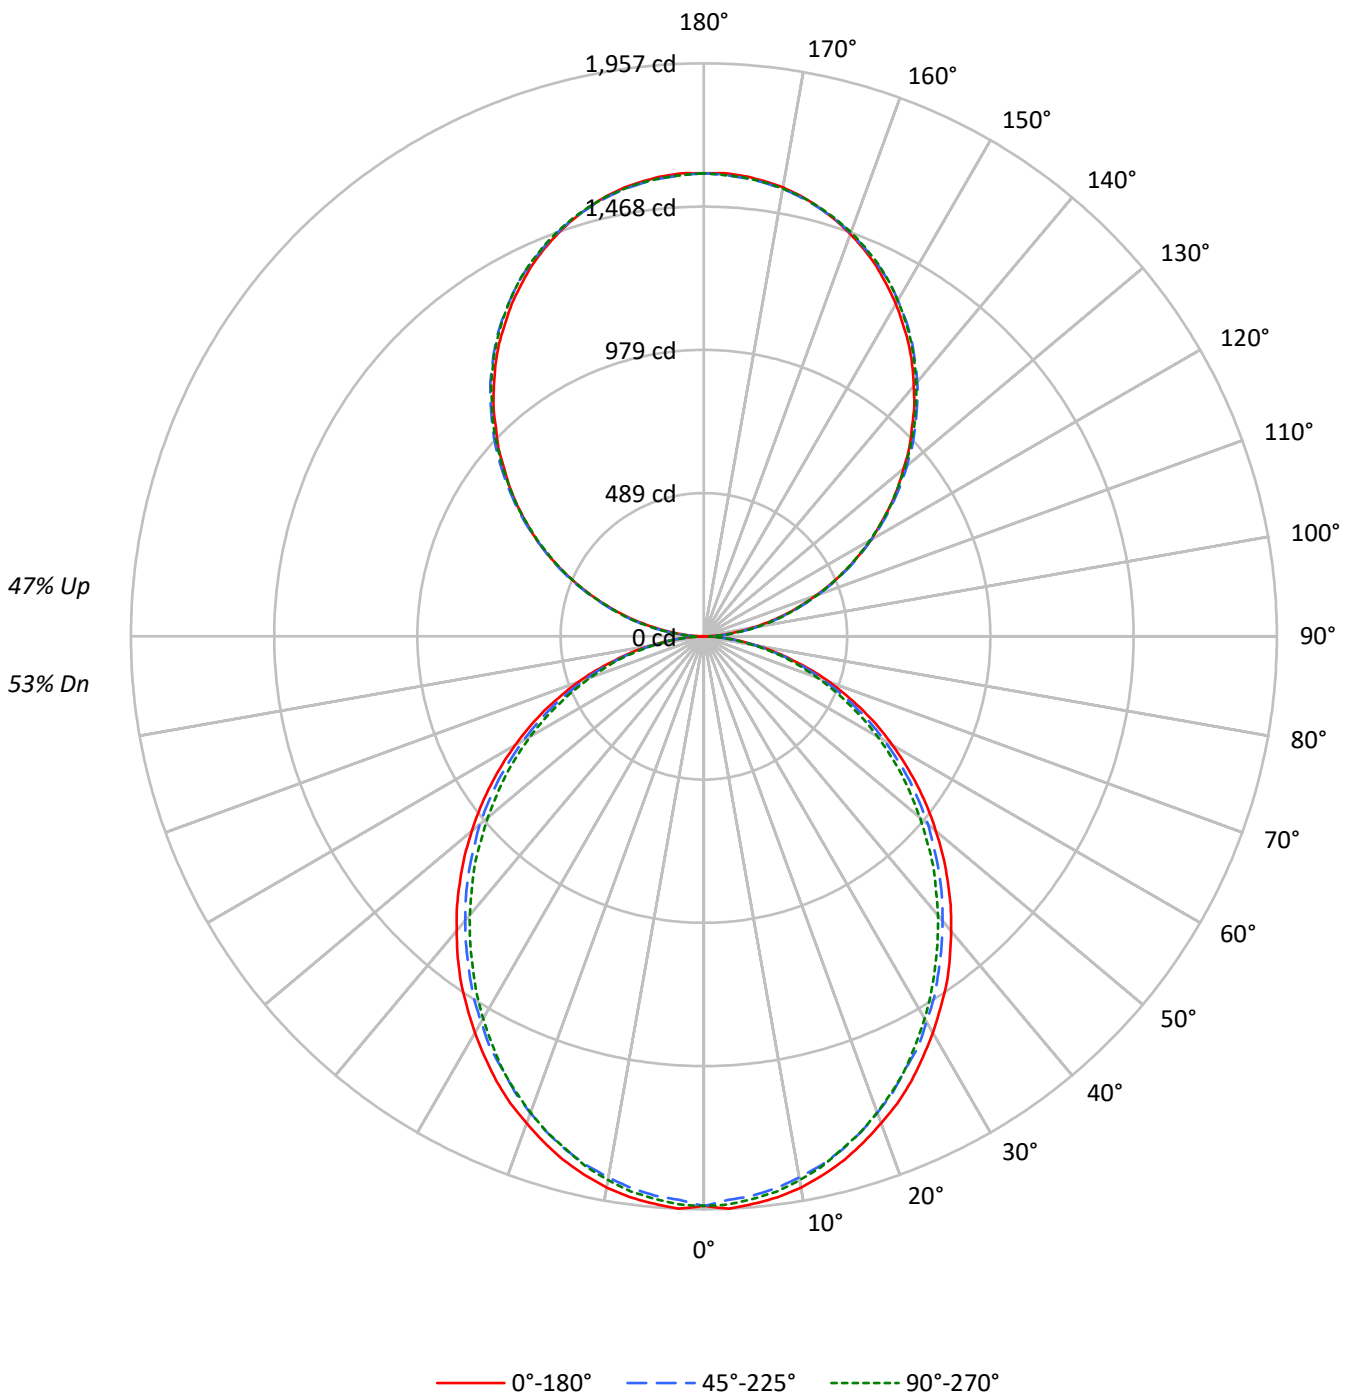



TEST NUMBER: P905058

CATALOG NUMBER: DFN2DIP-4P4F0-050D050US835-FLLFLL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	59	59	59	59	59	59	53
1	98	94	90	87	91	87	84	81	74	72	70	63	61	59	52	51	50	52	51	50	45
2	90	82	76	71	83	76	71	66	65	61	58	55	52	50	46	44	42	46	44	42	37
3	82	72	65	59	75	67	61	55	58	53	49	49	45	42	41	38	36	41	38	36	32
4	75	64	56	50	69	60	52	47	51	46	41	43	39	36	36	33	31	36	33	31	27
5	69	57	49	43	63	53	46	40	46	40	36	39	35	31	33	29	27	33	29	27	24
6	63	51	43	37	58	48	40	35	41	36	31	35	31	27	30	26	24	30	26	24	21
7	59	46	38	33	54	43	36	31	37	32	28	32	28	24	27	24	21	27	24	21	18
8	54	42	34	29	50	39	32	27	34	29	24	29	25	22	25	21	19	25	21	19	16
9	51	38	31	26	47	36	29	24	31	26	22	27	23	19	23	20	17	23	20	17	15
10	47	35	28	23	44	33	26	22	29	23	20	25	21	18	21	18	15	21	18	15	13

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1262	1262	1262
5°	1264	1245	1253
10°	1254	1229	1237
15°	1236	1209	1211
20°	1211	1181	1184
25°	1186	1148	1153
30°	1155	1117	1114
35°	1126	1081	1072
40°	1090	1044	1032
45°	1054	1007	992
50°	1014	968	945
55°	973	923	902
60°	927	870	852
65°	876	815	794
70°	811	748	732
75°	721	668	675
80°	614	566	564
85°	445	389	381

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 90°  
 Luminance: 1197 cd/sqm



TEST NUMBER: P905058

CATALOG NUMBER: DFN2DIP-4P4F0-050D050US835-FLLFLL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	183.1	2.0
10°-20°	515.2	5.5
20°-30°	757.2	8.1
30°-40°	879.4	9.4
40°-50°	878.3	9.4
50°-60°	765.8	8.2
60°-70°	566.1	6.0
70°-80°	320.3	3.4
80°-90°	89.0	0.9
90°-100°	97.8	1.0
100°-110°	310.9	3.3
110°-120°	532.1	5.7
120°-130°	699.7	7.5
130°-140°	785.4	8.4
140°-150°	770.2	8.2
150°-160°	646.1	6.9
160°-170°	428.5	4.6
170°-180°	149.8	1.6
0°-30°	1455.5	15.5
0°-40°	2334.9	24.9
0°-60°	3979.0	42.4
0°-90°	4954.5	52.8
90°-120°	940.8	10.0
90°-150°	3196.2	34.1
90°-180°	4421.0	47.2
0°-180°	9375.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1946	1946	1946	1946	1946	
5°	1946	1938	1918	1932	1929	185
15°	1852	1841	1816	1824	1815	522
25°	1676	1661	1630	1633	1630	771
35°	1446	1428	1398	1386	1377	903
45°	1177	1164	1136	1115	1108	908
55°	891	879	857	834	825	796
65°	601	589	571	554	544	594
75°	314	311	301	290	294	335
85°	77	75	73	67	66	85
90°	1	17	47	44	45	9
95°	70	83	85	85	83	77
105°	287	291	294	296	296	303
115°	534	542	539	538	534	528
125°	777	788	785	780	779	694
135°	1004	1019	1022	1021	1017	776
145°	1220	1229	1237	1238	1233	762
155°	1394	1398	1402	1409	1405	642
165°	1517	1516	1516	1525	1518	428
175°	1578	1575	1572	1581	1573	150
180°	1581	1581	1581	1581	1581	



TEST NUMBER: P905058

CATALOG NUMBER: DFN2DIP-4P4F0-050D050US835-FLLFL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1945.5	1945.5	1945.5	1945.5	1945.5
2.5°	1956.8	1947.5	1926.9	1945.5	1942.0
5°	1945.5	1938.2	1917.5	1932.4	1928.9
7.5°	1932.4	1921.3	1900.7	1915.8	1912.0
10°	1912.0	1898.9	1876.5	1891.3	1885.8
12.5°	1883.8	1872.7	1850.3	1859.6	1855.8
15°	1852.0	1840.9	1816.5	1824.1	1814.7
17.5°	1812.7	1801.6	1777.2	1786.5	1777.2
20°	1769.7	1758.6	1732.4	1737.9	1730.6
22.5°	1726.8	1709.9	1685.5	1685.5	1681.7
25°	1676.2	1661.3	1629.5	1633.1	1629.5
27.5°	1620.0	1606.9	1582.7	1577.1	1567.8
30°	1564.0	1549.0	1521.0	1515.4	1507.9
32.5°	1504.1	1493.0	1463.0	1451.7	1444.2
35°	1446.1	1427.5	1397.5	1386.2	1376.9
37.5°	1380.6	1363.8	1333.8	1320.7	1311.4
40°	1313.4	1298.3	1268.3	1251.6	1244.1
42.5°	1247.9	1232.8	1203.0	1184.1	1173.0
45°	1176.8	1163.7	1135.5	1115.1	1107.5
47.5°	1107.5	1094.4	1064.5	1043.8	1032.7
50°	1034.5	1025.2	999.0	972.8	963.4
52.5°	963.4	950.3	926.1	905.5	892.4
55°	890.6	879.3	856.8	834.4	825.1
57.5°	817.5	808.2	783.8	761.4	753.8
60°	744.5	737.2	711.0	690.3	684.8
62.5°	673.5	660.4	641.7	623.0	615.5
65°	600.6	589.3	570.6	553.8	544.4
67.5°	525.8	516.3	499.6	486.5	478.9
70°	456.5	449.0	432.1	419.0	411.7
72.5°	385.5	377.9	368.6	355.5	349.9
75°	314.2	310.6	301.1	290.0	293.8
77.5°	250.7	243.1	239.4	233.8	228.3
80°	187.2	185.2	181.4	175.9	172.1
82.5°	127.2	127.2	125.4	117.9	117.9
85°	76.6	74.8	73.0	67.3	65.5
87.5°	33.7	30.0	26.2	20.6	18.7
90°	1.4	17.2	46.7	43.9	45.3
92.5°	29.6	40.0	41.5	42.9	42.9
95°	69.6	83.0	85.3	85.3	83.0
97.5°	115.8	128.2	133.5	133.5	133.5
100°	169.2	180.2	184.0	184.0	182.6
102.5°	225.5	233.6	238.8	240.3	238.8
105°	287.0	290.8	293.7	296.0	296.0
107.5°	348.0	353.7	353.7	354.7	348.0
110°	407.1	414.8	414.8	414.8	410.9



TEST NUMBER: P905058

CATALOG NUMBER: DFN2DIP-4P4F0-050D050US835-FLLFLL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	471.0	479.1	477.7	473.9	471.0
115°	533.9	541.6	539.2	537.8	533.9
117.5°	596.4	606.9	600.2	596.4	592.6
120°	659.3	669.8	659.3	659.3	655.0
122.5°	716.5	729.9	723.2	719.4	716.5
125°	776.6	788.5	784.7	780.4	779.0
127.5°	835.2	850.0	844.8	839.0	835.2
130°	890.1	907.2	904.8	902.0	896.7
132.5°	951.6	964.9	965.9	959.2	955.4
135°	1004.5	1019.2	1022.1	1020.7	1016.9
137.5°	1063.6	1075.5	1077.9	1076.9	1071.2
140°	1115.5	1127.5	1134.1	1134.1	1128.9
142.5°	1168.9	1180.9	1184.7	1186.1	1180.9
145°	1219.5	1229.0	1236.6	1238.1	1232.8
147.5°	1264.8	1276.7	1282.4	1284.8	1279.5
150°	1311.5	1319.6	1324.8	1329.1	1324.8
152.5°	1353.0	1361.1	1367.7	1373.0	1367.7
155°	1394.4	1398.2	1402.5	1409.2	1404.9
157.5°	1430.2	1433.0	1435.4	1445.0	1438.3
160°	1462.1	1465.0	1466.4	1474.5	1468.8
162.5°	1491.7	1491.7	1493.1	1502.2	1495.5
165°	1517.0	1515.5	1515.5	1525.1	1518.4
167.5°	1539.8	1535.5	1535.5	1545.1	1538.4
170°	1557.0	1553.2	1551.8	1561.3	1553.2
172.5°	1568.9	1565.1	1563.7	1573.2	1565.1
175°	1578.5	1574.6	1571.8	1581.3	1573.2
177.5°	1583.7	1579.9	1577.0	1585.1	1577.0
180°	1581.3	1581.3	1581.3	1581.3	1581.3



TEST NUMBER: P905058  
 CATALOG NUMBER: DFN2DIP-4P4F0-050D050US835-FLLFLL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.36	9.25	9.29	10.20	11.43	7.91	8.80	8.85	9.75	10.98
	3H	10.03	10.82	10.97	11.78	13.03	9.54	10.33	10.48	11.29	12.54
	4H	10.62	11.37	11.58	12.34	13.60	10.12	10.88	11.08	11.84	13.10
	6H	11.02	11.72	11.99	12.69	13.96	10.52	11.22	11.49	12.19	13.46
	8H	11.13	11.79	12.11	12.78	14.05	10.63	11.29	11.61	12.28	13.55
	12H	11.18	11.81	12.17	12.79	14.09	10.67	11.30	11.66	12.28	13.58
4H	2H	8.82	9.58	9.79	10.54	11.80	8.47	9.22	9.43	10.19	11.45
	3H	10.70	11.33	11.67	12.32	13.60	10.29	10.92	11.26	11.91	13.19
	4H	11.42	11.99	12.40	12.98	14.28	10.99	11.57	11.98	12.56	13.86
	6H	11.94	12.44	12.93	13.45	14.74	11.51	12.00	12.50	13.01	14.31
	8H	12.09	12.56	13.09	13.56	14.87	11.66	12.12	12.65	13.12	14.44
	12H	12.17	12.59	13.19	13.61	14.93	11.72	12.14	12.74	13.16	14.48
8H	4H	11.62	12.08	12.61	13.08	14.40	11.24	11.70	12.24	12.71	14.02
	6H	12.26	12.64	13.28	13.68	15.00	11.87	12.26	12.89	13.30	14.61
	8H	12.48	12.82	13.51	13.85	15.18	12.09	12.43	13.12	13.46	14.79
	12H	12.62	12.91	13.65	13.94	15.31	12.21	12.50	13.24	13.53	14.90
12H	4H	11.60	12.02	12.62	13.04	14.36	11.24	11.65	12.25	12.67	13.99
	6H	12.29	12.62	13.32	13.66	14.99	11.92	12.25	12.94	13.29	14.61
	8H	12.53	12.83	13.57	13.86	15.23	12.15	12.45	13.19	13.48	14.85