

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P910458

Luminaire Tested: DFN2DIP-4P4F0-030D030US850-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P910458
REPORT IS A COMBINATION OF REPORTS P899079 AND P895967
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P4F0-030D030US850-FLLFLL
Description: 4 foot, 90deg - 4way Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6238.1 lumens
Efficiency: N/A
Efficacy: 123.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 4.07' x L: 4.07' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 50.7
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.983
Total Harmonic Distortion (THDi): 0.073
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P910458

CATALOG NUMBER: DFN2DIP-4P4F0-030D030US850-FLLFLL

Luminous Intensity Polar Plot

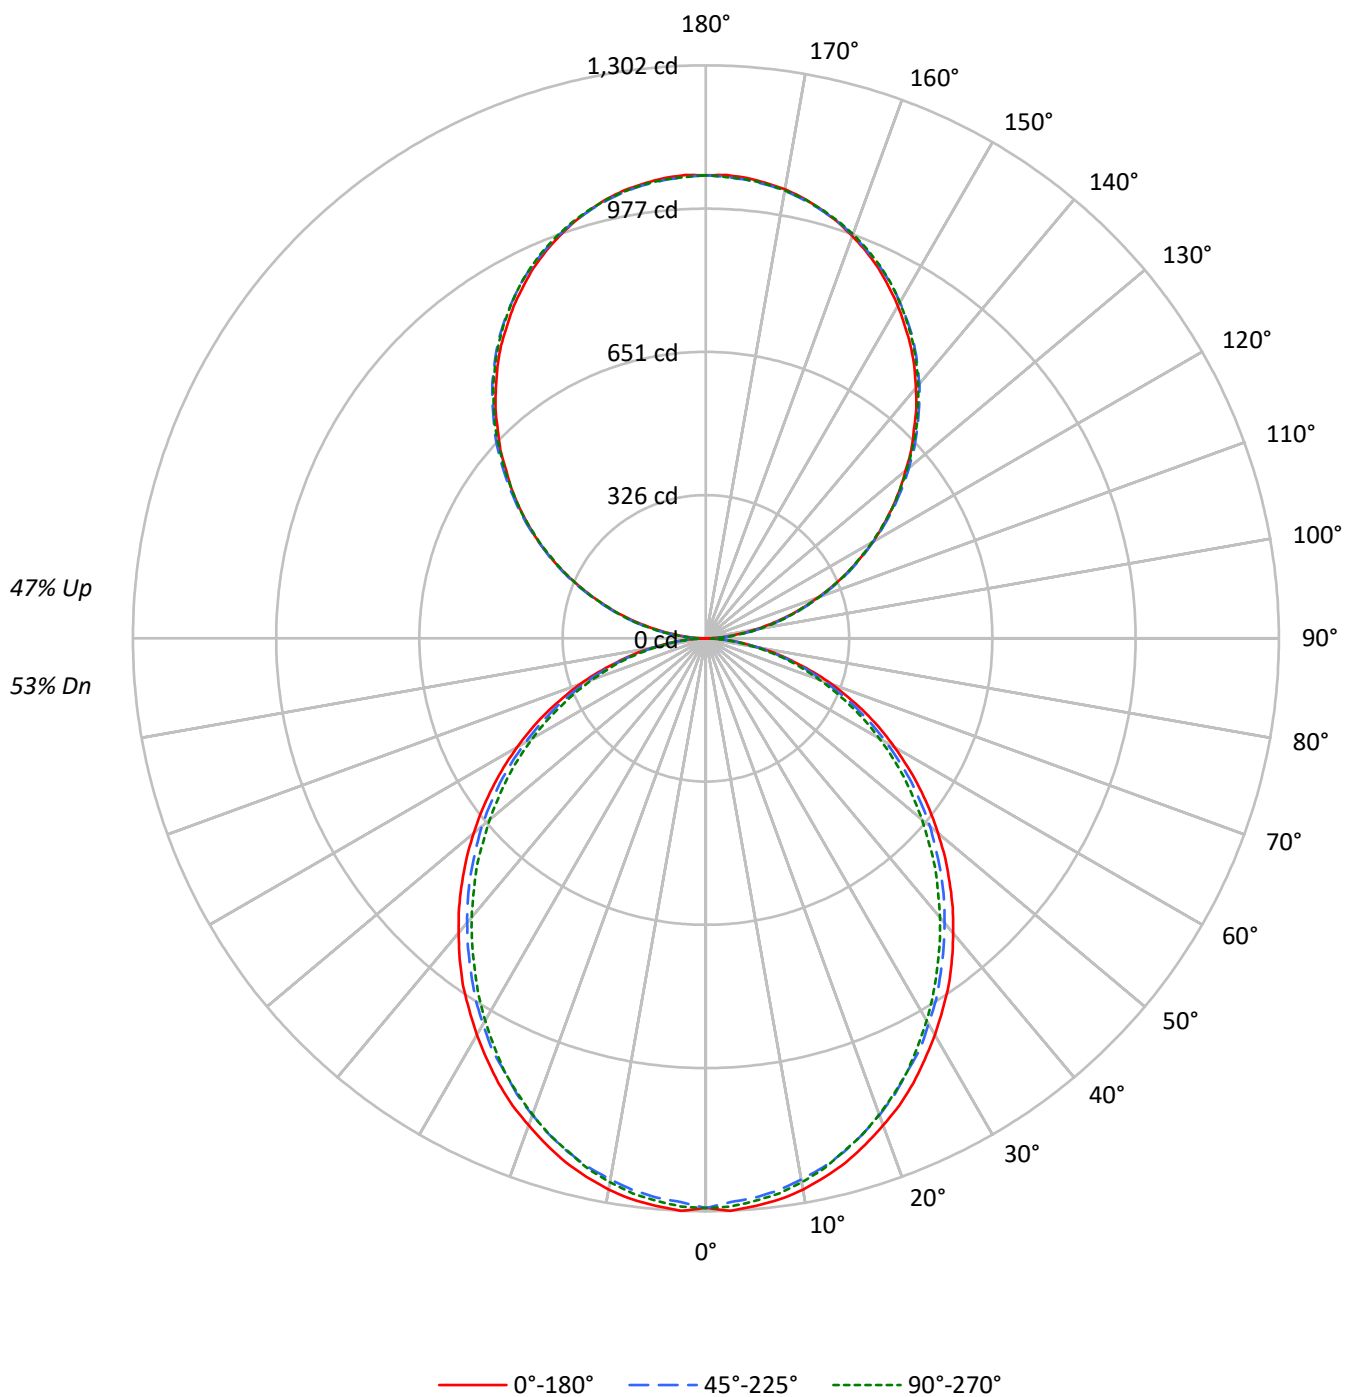

TEST NUMBER: P910458

CATALOG NUMBER: DFN2DIP-4P4F0-030D030US850-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	59	59	59
1	98	94	90	87	91	87	84	81	74	72	70	63	61	59	52	51	50
2	90	82	76	71	83	76	71	66	65	61	58	55	52	50	46	44	42
3	82	72	65	59	75	67	61	55	58	53	49	49	45	42	41	38	36
4	75	64	56	50	69	60	52	47	51	46	41	43	39	36	36	33	31
5	69	57	49	43	63	53	46	40	46	40	36	39	35	31	33	29	27
6	63	51	43	37	58	48	40	35	41	36	31	35	31	27	30	26	24
7	59	46	38	33	54	43	36	31	37	32	28	32	28	24	27	24	21
8	54	42	34	29	50	39	32	27	34	29	24	29	25	22	25	21	19
9	51	38	31	26	47	36	29	24	31	26	22	27	23	19	23	20	17
10	47	35	28	23	44	33	26	22	29	23	20	25	21	18	21	18	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	840	840	840
5°	841	828	834
10°	834	818	823
15°	822	804	806
20°	806	786	788
25°	789	764	767
30°	769	743	741
35°	749	719	713
40°	725	694	687
45°	701	670	660
50°	675	644	629
55°	648	614	600
60°	617	579	567
65°	583	542	528
70°	540	498	487
75°	480	445	449
80°	408	377	376
85°	296	259	253

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 798 cd/sqm

TEST NUMBER: P910458

CATALOG NUMBER: DFN2DIP-4P4F0-030D030US850-FLLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	121.8	2.0
10°-20°	342.8	5.5
20°-30°	503.8	8.1
30°-40°	585.2	9.4
40°-50°	584.4	9.4
50°-60°	509.6	8.2
60°-70°	376.7	6.0
70°-80°	213.1	3.4
80°-90°	59.2	0.9
90°-100°	65.1	1.0
100°-110°	206.9	3.3
110°-120°	354.0	5.7
120°-130°	465.6	7.5
130°-140°	522.6	8.4
140°-150°	512.5	8.2
150°-160°	429.9	6.9
160°-170°	285.1	4.6
170°-180°	99.7	1.6
0°-30°	968.5	15.5
0°-40°	1553.6	24.9
0°-60°	2647.7	42.4
0°-90°	3296.7	52.8
90°-120°	626.0	10.0
90°-150°	2126.7	34.1
90°-180°	2941.0	47.1
0°-180°	6238.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1294	1294	1294	1294	1294	
5°	1294	1290	1276	1286	1283	123
15°	1232	1225	1209	1214	1208	347
25°	1115	1106	1084	1087	1084	513
35°	962	950	930	922	916	601
45°	783	774	756	742	737	604
55°	593	585	570	555	549	530
65°	400	392	380	368	362	395
75°	209	207	200	193	196	223
85°	51	50	49	45	44	57
90°	1	11	31	29	30	6
95°	46	55	57	57	55	52
105°	191	194	195	197	197	202
115°	355	360	359	358	355	351
125°	517	525	522	519	518	462
135°	668	678	680	679	677	517
145°	812	818	823	824	820	507
155°	928	930	933	938	935	427
165°	1009	1008	1008	1015	1010	285
175°	1050	1048	1046	1052	1047	100
180°	1052	1052	1052	1052	1052	



TEST NUMBER: P910458

CATALOG NUMBER: DFN2DIP-4P4F0-030D030US850-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1294.5	1294.5	1294.5	1294.5	1294.5
2.5°	1302.1	1295.9	1282.1	1294.5	1292.2
5°	1294.5	1289.7	1275.9	1285.9	1283.4
7.5°	1285.9	1278.5	1264.7	1274.8	1272.2
10°	1272.2	1263.5	1248.6	1258.5	1254.8
12.5°	1253.5	1246.1	1231.2	1237.3	1234.9
15°	1232.3	1225.0	1208.7	1213.7	1207.5
17.5°	1206.1	1198.8	1182.5	1188.7	1182.5
20°	1177.5	1170.1	1152.7	1156.4	1151.5
22.5°	1149.0	1137.8	1121.5	1121.5	1119.0
25°	1115.3	1105.5	1084.3	1086.7	1084.3
27.5°	1077.9	1069.2	1053.1	1049.4	1043.2
30°	1040.7	1030.7	1012.1	1008.3	1003.3
32.5°	1000.9	993.4	973.5	965.9	960.9
35°	962.3	949.9	929.9	922.4	916.1
37.5°	918.7	907.5	887.5	878.8	872.6
40°	873.9	863.9	843.9	832.9	827.9
42.5°	830.3	820.3	800.5	787.9	780.5
45°	783.1	774.3	755.6	741.9	736.9
47.5°	736.9	728.3	708.3	694.6	687.1
50°	688.4	682.1	664.7	647.3	641.1
52.5°	641.1	632.4	616.3	602.5	593.8
55°	592.6	585.1	570.1	555.3	549.1
57.5°	544.0	537.8	521.6	506.6	501.6
60°	495.4	490.5	473.1	459.3	455.7
62.5°	448.1	439.4	427.0	414.5	409.6
65°	399.7	392.1	379.7	368.5	362.3
67.5°	349.9	343.6	332.4	323.7	318.7
70°	303.8	298.8	287.6	278.8	273.9
72.5°	256.5	251.4	245.2	236.5	232.9
75°	209.0	206.7	200.4	193.0	195.5
77.5°	166.8	161.8	159.3	155.6	151.9
80°	124.5	123.2	120.7	117.0	114.6
82.5°	84.6	84.6	83.5	78.4	78.4
85°	51.0	49.8	48.6	44.8	43.6
87.5°	22.4	20.0	17.4	13.8	12.4
90°	1.0	11.4	31.1	29.2	30.2
92.5°	19.6	26.6	27.6	28.5	28.5
95°	46.4	55.2	56.8	56.8	55.2
97.5°	77.1	85.3	88.8	88.8	88.8
100°	112.6	119.9	122.4	122.4	121.5
102.5°	150.0	155.5	158.9	159.9	158.9
105°	191.0	193.5	195.4	197.0	197.0
107.5°	231.6	235.3	235.3	236.0	231.6
110°	270.9	276.0	276.0	276.0	273.5



TEST NUMBER: P910458

CATALOG NUMBER: DFN2DIP-4P4F0-030D030US850-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	313.4	318.8	317.8	315.3	313.4
115°	355.3	360.3	358.8	357.9	355.3
117.5°	396.8	403.8	399.4	396.8	394.2
120°	438.7	445.7	438.7	438.7	435.8
122.5°	476.8	485.6	481.2	478.6	476.8
125°	516.8	524.7	522.1	519.2	518.3
127.5°	555.7	565.6	562.2	558.3	555.7
130°	592.2	603.6	602.1	600.2	596.6
132.5°	633.1	642.0	642.7	638.2	635.7
135°	668.4	678.2	680.1	679.2	676.6
137.5°	707.7	715.6	717.2	716.6	712.8
140°	742.3	750.2	754.7	754.7	751.1
142.5°	777.9	785.7	788.3	789.3	785.7
145°	811.5	817.8	822.9	823.8	820.3
147.5°	841.6	849.5	853.3	854.9	851.4
150°	872.7	878.1	881.5	884.4	881.5
152.5°	900.3	905.6	910.0	913.6	910.0
155°	927.9	930.3	933.2	937.7	934.9
157.5°	951.6	953.5	955.2	961.5	957.1
160°	972.9	974.8	975.8	981.1	977.4
162.5°	992.6	992.6	993.6	999.5	995.1
165°	1009.4	1008.4	1008.4	1014.7	1010.3
167.5°	1024.6	1021.7	1021.7	1028.0	1023.6
170°	1036.0	1033.5	1032.6	1038.9	1033.5
172.5°	1043.9	1041.5	1040.5	1046.8	1041.5
175°	1050.3	1047.8	1045.9	1052.2	1046.8
177.5°	1053.8	1051.2	1049.3	1054.8	1049.3
180°	1052.2	1052.2	1052.2	1052.2	1052.2

TEST NUMBER: P910458

CATALOG NUMBER: DFN2DIP-4P4F0-030D030US850-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.94	7.83	7.87	8.78	10.01	6.50	7.39	7.43	8.34	9.57
	3H	8.61	9.41	9.55	10.37	11.62	8.12	8.92	9.06	9.88	11.13
	4H	9.20	9.96	10.16	10.92	12.18	8.71	9.46	9.67	10.43	11.69
	6H	9.61	10.30	10.58	11.27	12.55	9.11	9.80	10.08	10.77	12.05
	8H	9.72	10.38	10.69	11.36	12.64	9.22	9.88	10.19	10.86	12.13
	12H	9.77	10.40	10.75	11.38	12.67	9.26	9.89	10.24	10.87	12.17
4H	2H	7.41	8.16	8.37	9.12	10.39	7.05	7.81	8.02	8.77	10.03
	3H	9.28	9.91	10.26	10.91	12.18	8.87	9.50	9.85	10.50	11.77
	4H	10.00	10.58	10.99	11.56	12.86	9.58	10.15	10.56	11.14	12.44
	6H	10.52	11.02	11.52	12.03	13.33	10.09	10.59	11.09	11.60	12.90
	8H	10.68	11.14	11.67	12.14	13.46	10.24	10.70	11.24	11.71	13.02
	12H	10.75	11.17	11.77	12.19	13.51	10.31	10.72	11.32	11.74	13.06
8H	4H	10.20	10.67	11.20	11.67	12.98	9.83	10.29	10.82	11.29	12.61
	6H	10.84	11.22	11.86	12.27	13.58	10.46	10.84	11.48	11.89	13.20
	8H	11.07	11.40	12.09	12.43	13.76	10.67	11.01	11.70	12.04	13.37
	12H	11.20	11.50	12.24	12.53	13.90	10.79	11.09	11.82	12.11	13.49
12H	4H	10.19	10.61	11.20	11.63	12.95	9.82	10.24	10.84	11.26	12.58
	6H	10.87	11.21	11.90	12.24	13.57	10.50	10.84	11.53	11.87	13.20
	8H	11.12	11.42	12.15	12.44	13.82	10.74	11.04	11.77	12.06	13.44