

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P910471

Luminaire Tested: DFN2DIP-4P4F0-030D060US850-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P910471
REPORT IS A COMBINATION OF REPORTS P900635 AND P897523
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P4F0-030D060US850-FLLONL
Description: 4 foot, 90deg - 4way Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 9881.2 lumens
Efficiency: N/A
Efficacy: 126.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 4.07' x L: 4.07' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 78
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.983
Total Harmonic Distortion (THDi): 0.073
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P910471

CATALOG NUMBER: DFN2DIP-4P4F0-030D060US850-FLLONL

Luminous Intensity Polar Plot

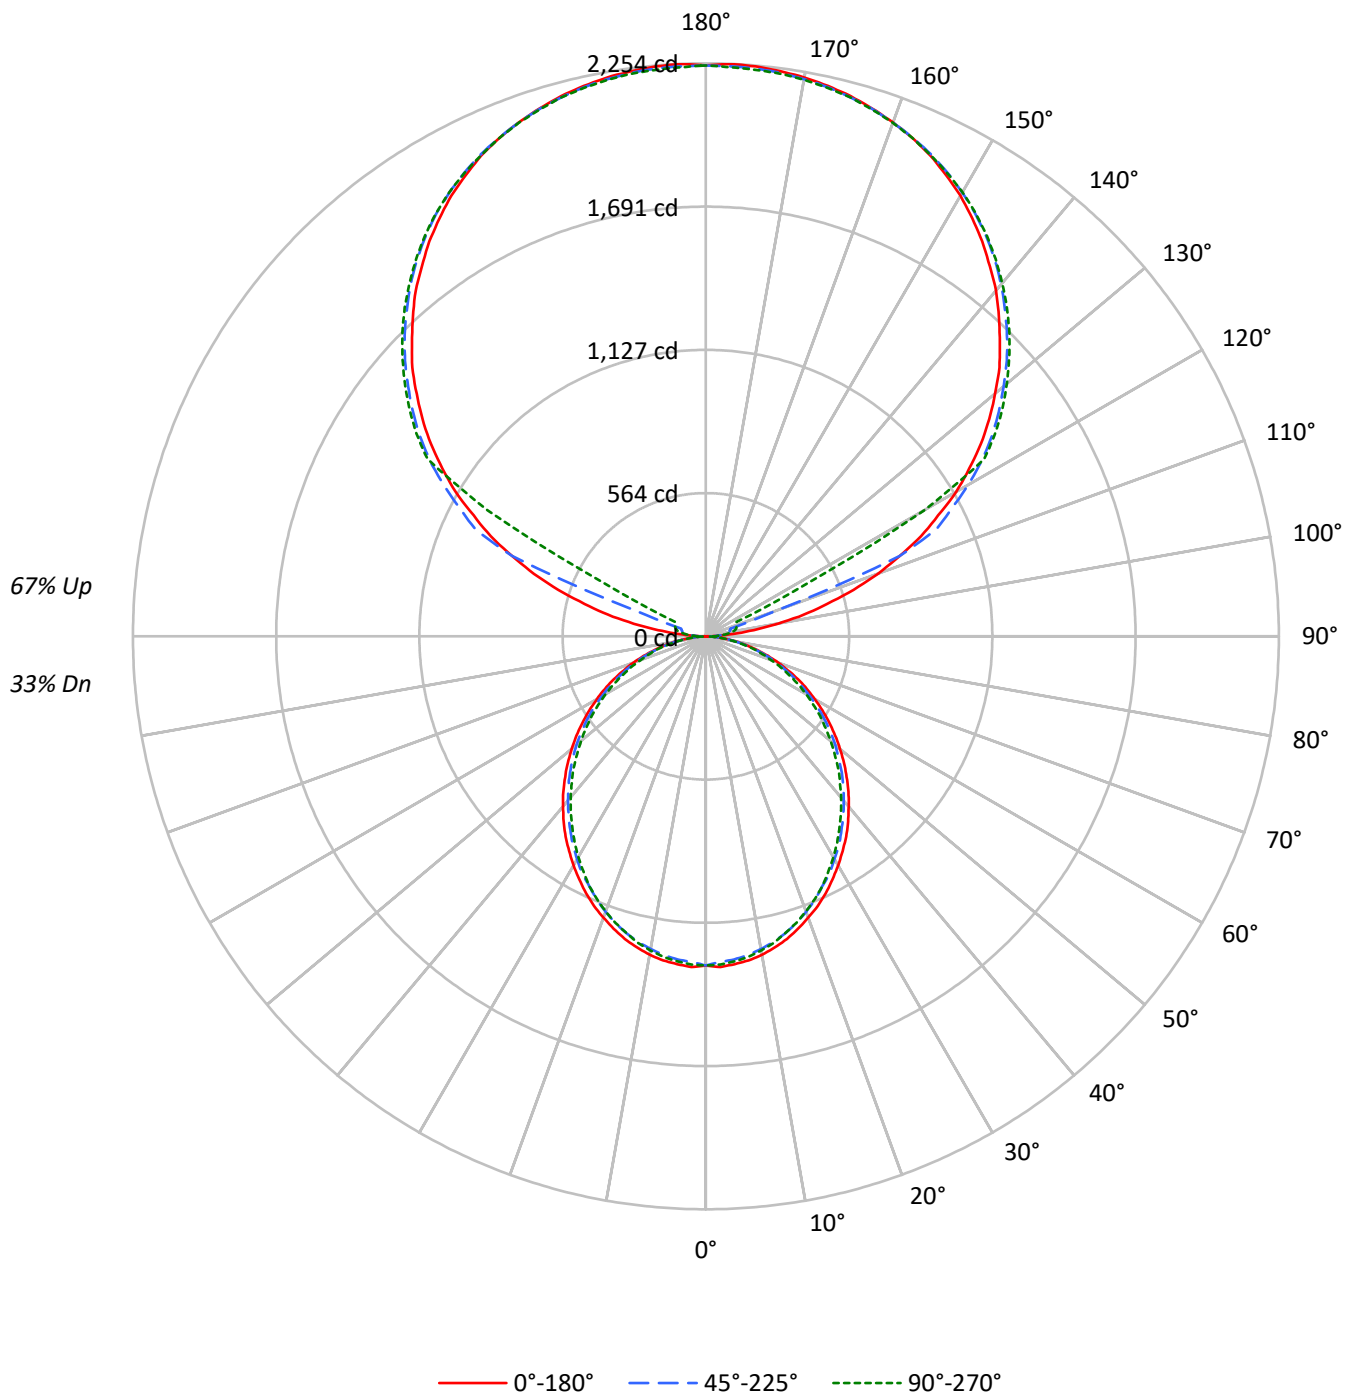

TEST NUMBER: P910471

CATALOG NUMBER: DFN2DIP-4P4F0-030D060US850-FLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	103	103	103	103	93	93	93	93	74	74	74	57	57	57	41	41	41			33
1	94	90	86	83	85	81	78	75	65	63	61	50	48	47	36	35	34			28
2	86	78	72	67	77	71	66	62	57	53	50	44	41	39	32	30	29			24
3	78	69	62	56	70	62	56	51	50	46	42	39	36	33	28	26	25			20
4	71	61	53	47	64	55	49	43	44	40	36	34	31	28	25	23	21			17
5	65	54	46	40	59	49	42	37	40	35	31	31	27	25	23	20	18			15
6	60	48	41	35	54	44	37	32	36	31	27	28	24	21	20	18	16			13
7	56	44	36	30	50	40	33	28	32	27	23	25	22	19	19	16	14			12
8	51	39	32	27	46	36	29	25	29	24	21	23	19	17	17	15	13			10
9	48	36	29	24	43	33	26	22	27	22	19	21	18	15	16	13	12			9
10	45	33	26	21	40	30	24	20	25	20	17	19	16	14	15	12	11			9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	840	840	840
5°	841	828	834
10°	834	818	823
15°	822	804	806
20°	806	786	788
25°	789	764	767
30°	769	743	741
35°	749	719	713
40°	725	694	687
45°	701	670	660
50°	675	644	629
55°	648	614	600
60°	617	579	567
65°	583	542	528
70°	540	498	487
75°	480	445	449
80°	408	377	376
85°	296	259	253

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1157 cd/sqm

TEST NUMBER: P910471

CATALOG NUMBER: DFN2DIP-4P4F0-030D060US850-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	121.8	1.2
10°-20°	342.8	3.5
20°-30°	503.8	5.1
30°-40°	585.2	5.9
40°-50°	584.4	5.9
50°-60°	509.6	5.2
60°-70°	376.7	3.8
70°-80°	213.1	2.2
80°-90°	60.2	0.6
90°-100°	74.1	0.7
100°-110°	276.0	2.8
110°-120°	732.1	7.4
120°-130°	1214.2	12.3
130°-140°	1289.8	13.1
140°-150°	1198.7	12.1
150°-160°	963.8	9.8
160°-170°	621.0	6.3
170°-180°	213.7	2.2
0°-30°	968.5	9.8
0°-40°	1553.6	15.7
0°-60°	2647.7	26.8
0°-90°	3297.7	33.4
90°-120°	1082.2	11.0
90°-150°	4785.0	48.4
90°-180°	6583.0	66.6
0°-180°	9881.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1294	1294	1294	1294	1294	
5°	1294	1290	1276	1286	1283	123
15°	1232	1225	1209	1214	1208	347
25°	1115	1106	1084	1087	1084	513
35°	962	950	930	922	916	601
45°	783	774	756	742	737	604
55°	593	585	570	555	549	530
65°	400	392	380	368	362	395
75°	209	207	200	193	196	223
85°	51	50	49	45	44	57
90°	2	20	32	41	44	9
95°	106	52	63	72	70	125
105°	494	543	99	117	124	528
115°	934	962	1003	250	133	920
125°	1321	1342	1373	1384	1389	1178
135°	1635	1661	1675	1692	1688	1263
145°	1896	1895	1922	1934	1926	1186
155°	2088	2074	2093	2103	2090	962
165°	2200	2190	2195	2207	2195	622
175°	2250	2239	2242	2254	2238	214
180°	2246	2246	2246	2246	2246	

TEST NUMBER: P910471

CATALOG NUMBER: DFN2DIP-4P4F0-030D060US850-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1294.5	1294.5	1294.5	1294.5	1294.5
2.5°	1302.1	1295.9	1282.1	1294.5	1292.2
5°	1294.5	1289.7	1275.9	1285.9	1283.4
7.5°	1285.9	1278.5	1264.7	1274.8	1272.2
10°	1272.2	1263.5	1248.6	1258.5	1254.8
12.5°	1253.5	1246.1	1231.2	1237.3	1234.9
15°	1232.3	1225.0	1208.7	1213.7	1207.5
17.5°	1206.1	1198.8	1182.5	1188.7	1182.5
20°	1177.5	1170.1	1152.7	1156.4	1151.5
22.5°	1149.0	1137.8	1121.5	1121.5	1119.0
25°	1115.3	1105.5	1084.3	1086.7	1084.3
27.5°	1077.9	1069.2	1053.1	1049.4	1043.2
30°	1040.7	1030.7	1012.1	1008.3	1003.3
32.5°	1000.9	993.4	973.5	965.9	960.9
35°	962.3	949.9	929.9	922.4	916.1
37.5°	918.7	907.5	887.5	878.8	872.6
40°	873.9	863.9	843.9	832.9	827.9
42.5°	830.3	820.3	800.5	787.9	780.5
45°	783.1	774.3	755.6	741.9	736.9
47.5°	736.9	728.3	708.3	694.6	687.1
50°	688.4	682.1	664.7	647.3	641.1
52.5°	641.1	632.4	616.3	602.5	593.8
55°	592.6	585.1	570.1	555.3	549.1
57.5°	544.0	537.8	521.6	506.6	501.6
60°	495.4	490.5	473.1	459.3	455.7
62.5°	448.1	439.4	427.0	414.5	409.6
65°	399.7	392.1	379.7	368.5	362.3
67.5°	349.9	343.6	332.4	323.7	318.7
70°	303.8	298.8	287.6	278.8	273.9
72.5°	256.5	251.4	245.2	236.5	232.9
75°	209.0	206.7	200.4	193.0	195.5
77.5°	166.8	161.8	159.3	155.6	151.9
80°	124.5	123.2	120.7	117.0	114.6
82.5°	84.6	84.6	83.5	78.4	78.4
85°	51.0	49.8	48.6	44.8	43.6
87.5°	22.4	20.0	17.4	13.8	12.4
90°	1.6	19.5	32.4	40.7	43.8
92.5°	40.7	34.2	38.9	42.3	43.8
95°	105.6	51.9	63.3	71.6	69.9
97.5°	190.1	56.9	82.7	87.8	89.4
100°	287.7	65.0	92.6	105.6	108.8
102.5°	394.8	391.7	95.9	113.7	118.7
105°	493.9	542.7	99.1	116.9	123.5
107.5°	609.4	649.9	102.5	120.2	126.8
110°	720.0	753.9	284.5	122.0	128.3

TEST NUMBER: P910471

CATALOG NUMBER: DFN2DIP-4P4F0-030D060US850-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	823.9	853.0	825.4	125.0	130.1
115°	934.3	961.9	1002.6	250.3	133.3
117.5°	1030.2	1062.6	1090.4	857.9	432.2
120°	1137.5	1161.8	1191.2	1210.6	991.2
122.5°	1228.3	1254.4	1287.0	1296.6	1298.4
125°	1321.0	1342.2	1373.1	1384.5	1389.2
127.5°	1405.5	1428.3	1452.8	1469.0	1470.5
130°	1485.2	1511.2	1529.0	1546.9	1545.4
132.5°	1566.5	1587.6	1605.4	1620.0	1618.5
135°	1634.8	1660.8	1675.3	1691.7	1688.3
137.5°	1706.1	1725.6	1742.0	1758.2	1753.4
140°	1776.0	1789.1	1806.9	1821.5	1813.4
142.5°	1834.6	1846.0	1867.1	1880.0	1871.9
145°	1896.4	1894.6	1922.2	1933.7	1925.6
147.5°	1949.8	1945.0	1972.6	1980.7	1974.4
150°	2002.0	1990.5	2016.6	2026.3	2018.2
152.5°	2045.8	2032.8	2057.1	2067.0	2055.5
155°	2088.0	2073.5	2093.0	2102.7	2089.7
157.5°	2122.2	2109.2	2123.8	2135.3	2122.2
160°	2151.5	2141.6	2151.5	2161.1	2149.8
162.5°	2177.3	2167.7	2175.7	2187.2	2172.5
165°	2200.1	2190.5	2195.3	2206.7	2195.3
167.5°	2218.0	2208.2	2213.2	2224.7	2209.9
170°	2232.7	2222.9	2226.2	2237.5	2222.9
172.5°	2242.4	2232.7	2236.0	2247.4	2232.7
175°	2250.5	2239.1	2242.4	2253.7	2237.5
177.5°	2253.7	2242.4	2244.1	2255.5	2240.8
180°	2245.6	2245.6	2245.6	2245.6	2245.6

TEST NUMBER: P910471

CATALOG NUMBER: DFN2DIP-4P4F0-030D060US850-FLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	4.91	5.64	6.00	6.73	8.22	4.47	5.20	5.55	6.28	7.77
	3H	6.57	7.22	7.66	8.32	9.82	6.08	6.73	7.17	7.83	9.33
	4H	7.15	7.77	8.26	8.87	10.38	6.66	7.28	7.77	8.38	9.89
	6H	7.55	8.12	8.67	9.22	10.75	7.05	7.62	8.17	8.72	10.25
	8H	7.65	8.20	8.77	9.31	10.83	7.15	7.69	8.27	8.81	10.33
	12H	7.70	8.22	8.82	9.32	10.87	7.19	7.71	8.31	8.81	10.36
4H	2H	5.36	5.98	6.47	7.07	8.59	5.00	5.62	6.12	6.72	8.23
	3H	7.22	7.74	8.34	8.86	10.38	6.81	7.33	7.93	8.45	9.98
	4H	7.93	8.41	9.06	9.52	11.07	7.51	7.98	8.63	9.09	10.64
	6H	8.44	8.85	9.58	9.99	11.53	8.01	8.42	9.14	9.56	11.09
	8H	8.59	8.97	9.72	10.10	11.66	8.16	8.54	9.29	9.66	11.22
	12H	8.66	9.01	9.81	10.15	11.71	8.21	8.56	9.36	9.70	11.26
8H	4H	8.12	8.50	9.25	9.63	11.18	7.74	8.12	8.87	9.25	10.80
	6H	8.75	9.06	9.90	10.23	11.79	8.37	8.68	9.52	9.85	11.40
	8H	8.97	9.25	10.13	10.40	11.97	8.58	8.86	9.74	10.00	11.58
	12H	9.10	9.34	10.26	10.49	12.10	8.69	8.93	9.85	10.08	11.69
12H	4H	8.10	8.44	9.25	9.58	11.14	7.73	8.07	8.88	9.21	10.77
	6H	8.78	9.05	9.94	10.20	11.77	8.41	8.68	9.57	9.83	11.40
	8H	9.02	9.26	10.18	10.41	12.01	8.64	8.88	9.80	10.03	11.63

END OF REPORT