

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P910485

Luminaire Tested: DFN2DIP-4P4F0-040D030US850-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P910485
REPORT IS A COMBINATION OF REPORTS P900602 AND P897523
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P4F0-040D030US850-RLLONL
Description: 4 foot, 90deg - 4way Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open
No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7064.3 lumens
Efficiency: N/A
Efficacy: 114.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 4.07' x L: 4.07' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 61.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P910485

CATALOG NUMBER: DFN2DIP-4P4F0-040D030US850-RLLONL

Luminous Intensity Polar Plot

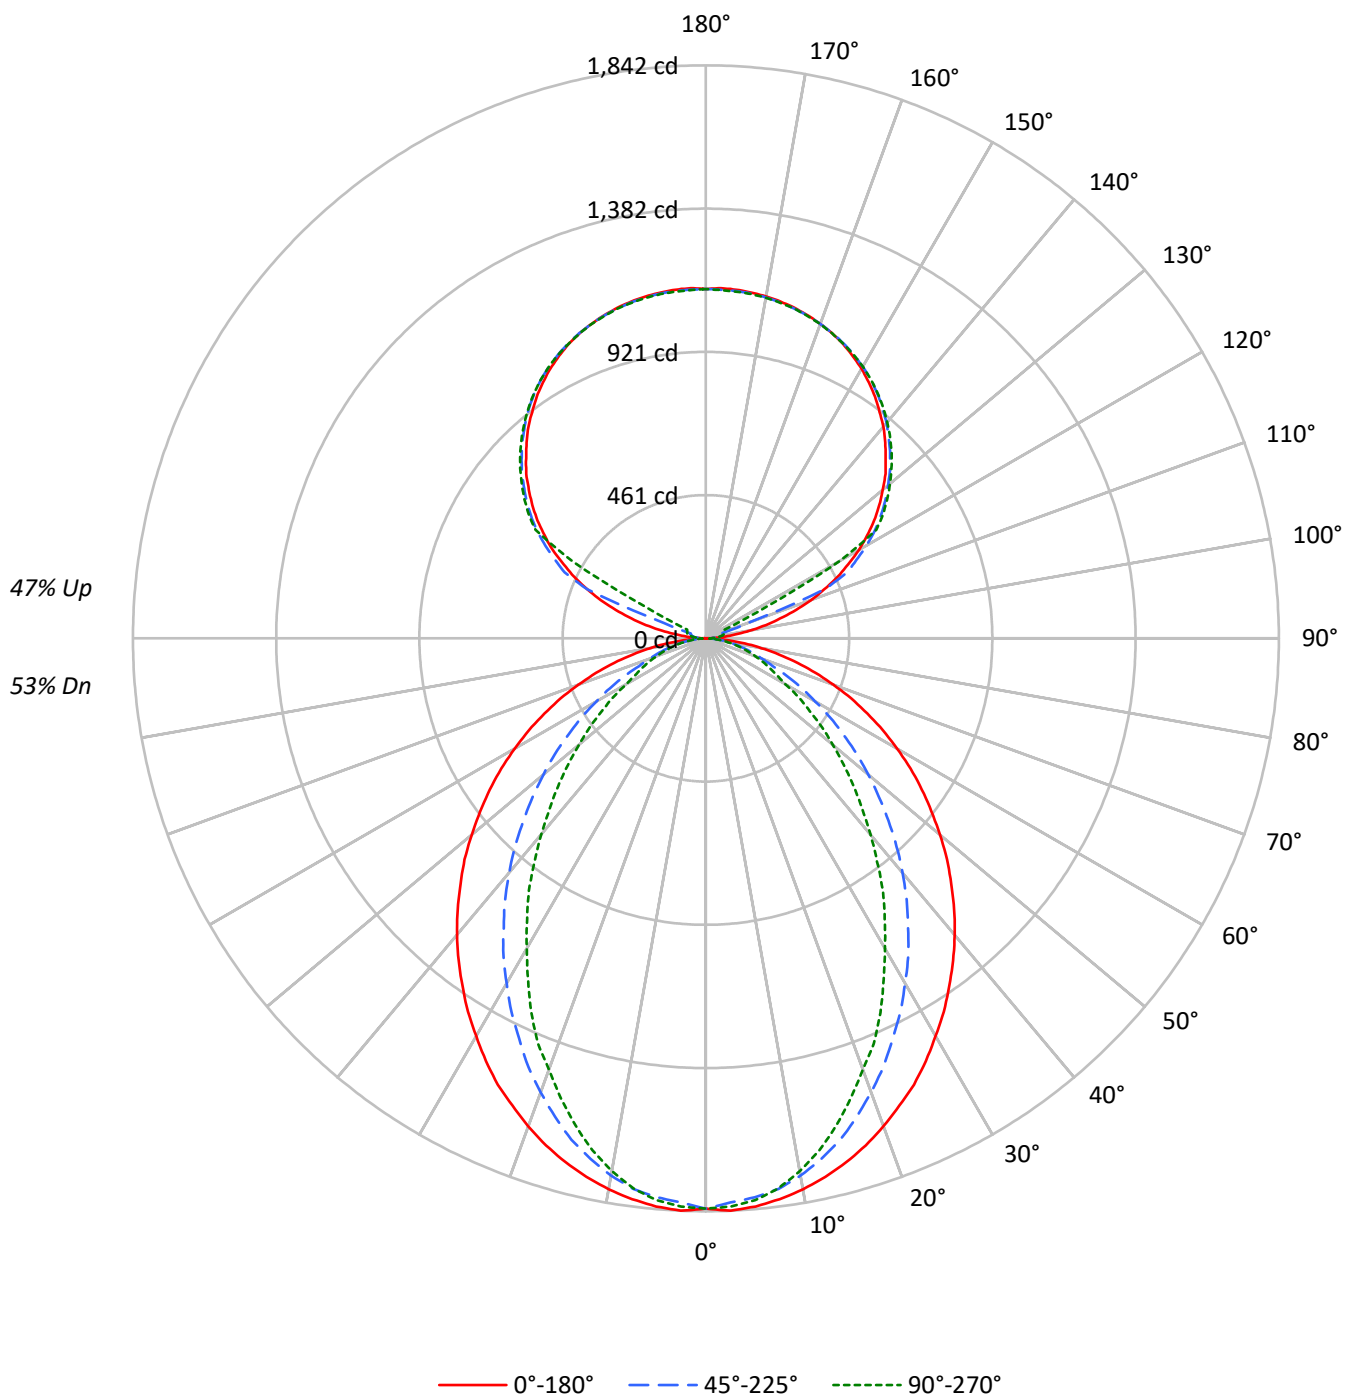

TEST NUMBER: P910485

CATALOG NUMBER: DFN2DIP-4P4F0-040D030US850-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	108	108	108	108	100	100	100	100	85	85	85	72	72	72	59	59	59
1	99	95	91	88	92	88	85	82	76	73	71	64	62	61	53	52	51
2	91	83	78	73	84	78	73	68	67	63	60	57	54	52	47	45	44
3	83	74	67	61	77	69	63	58	59	55	51	51	47	44	42	40	38
4	76	66	58	52	70	61	55	49	53	48	44	45	42	38	38	35	33
5	70	59	51	45	65	55	48	43	48	42	38	41	37	34	35	32	29
6	65	53	45	39	60	50	43	37	43	38	34	37	33	30	32	28	26
7	60	48	40	35	56	45	38	33	39	34	30	34	30	26	29	26	23
8	56	44	36	31	52	41	34	29	36	31	27	31	27	24	27	24	21
9	52	40	33	28	48	38	31	26	33	28	24	29	25	22	25	22	19
10	49	37	30	25	45	35	28	24	31	25	22	27	23	20	23	20	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1189	1189	1189
5°	1191	1171	1178
10°	1180	1148	1141
15°	1164	1111	1082
20°	1142	1059	1009
25°	1120	1000	939
30°	1091	941	851
35°	1062	876	772
40°	1033	810	683
45°	998	736	602
50°	963	661	522
55°	926	581	446
60°	884	497	368
65°	835	412	331
70°	775	333	300
75°	701	294	275
80°	593	248	240
85°	414	168	183

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 998 cd/sqm

TEST NUMBER: P910485

CATALOG NUMBER: DFN2DIP-4P4F0-040D030US850-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	171.8	2.4
10°-20°	471.7	6.7
20°-30°	662.3	9.4
30°-40°	721.9	10.2
40°-50°	663.5	9.4
50°-60°	521.1	7.4
60°-70°	339.2	4.8
70°-80°	174.6	2.5
80°-90°	46.5	0.7
90°-100°	37.0	0.5
100°-110°	138.0	2.0
110°-120°	366.1	5.2
120°-130°	607.1	8.6
130°-140°	644.9	9.1
140°-150°	599.4	8.5
150°-160°	481.9	6.8
160°-170°	310.5	4.4
170°-180°	106.9	1.5
0°-30°	1305.8	18.5
0°-40°	2027.7	28.7
0°-60°	3212.2	45.5
0°-90°	3772.6	53.4
90°-120°	541.1	7.7
90°-150°	2392.5	33.9
90°-180°	3292.0	46.6
0°-180°	7064.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1833	1833	1833	1833	1833	
5°	1833	1825	1804	1818	1814	174
15°	1744	1726	1669	1638	1621	491
25°	1583	1530	1420	1352	1327	728
35°	1364	1279	1133	1029	992	854
45°	1115	1004	830	712	672	861
55°	848	718	539	440	408	758
65°	572	438	289	232	227	568
75°	305	189	133	121	120	323
85°	71	36	32	32	32	82
90°	1	10	16	20	22	7
95°	53	26	32	36	35	63
105°	247	271	50	58	62	264
115°	467	481	501	125	67	460
125°	660	671	687	692	695	589
135°	817	830	838	846	844	631
145°	948	947	961	967	963	593
155°	1044	1037	1046	1051	1045	481
165°	1100	1095	1098	1103	1098	311
175°	1125	1120	1121	1127	1119	107
180°	1123	1123	1123	1123	1123	

TEST NUMBER: P910485

CATALOG NUMBER: DFN2DIP-4P4F0-040D030US850-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1833.4	1833.4	1833.4	1833.4	1833.4
2.5°	1841.7	1833.4	1815.1	1831.8	1828.4
5°	1833.4	1825.1	1803.5	1818.4	1813.5
7.5°	1818.4	1808.6	1785.4	1791.8	1783.6
10°	1798.6	1786.9	1753.8	1748.7	1738.9
12.5°	1773.7	1758.8	1713.8	1704.0	1685.7
15°	1743.8	1725.5	1669.2	1637.7	1621.1
17.5°	1709.0	1682.4	1612.6	1576.2	1549.6
20°	1669.2	1635.9	1552.9	1511.6	1475.0
22.5°	1626.0	1587.9	1491.5	1435.2	1410.4
25°	1582.9	1529.8	1420.2	1352.3	1327.3
27.5°	1531.5	1475.0	1353.9	1275.9	1237.6
30°	1476.7	1413.5	1280.8	1196.3	1151.5
32.5°	1423.6	1347.2	1211.2	1111.7	1070.1
35°	1364.0	1279.2	1133.3	1028.7	992.1
37.5°	1305.8	1214.5	1060.2	945.6	904.3
40°	1244.4	1144.9	983.9	866.1	823.0
42.5°	1181.3	1075.2	907.6	784.7	743.4
45°	1115.0	1003.8	829.6	711.8	671.9
47.5°	1052.0	934.2	755.0	637.1	600.6
50°	982.2	864.5	681.9	567.4	532.7
52.5°	914.1	789.7	612.3	502.7	471.2
55°	847.8	718.4	539.2	439.7	408.2
57.5°	779.8	647.1	474.5	381.6	355.1
60°	710.1	577.3	406.4	321.9	295.4
62.5°	642.2	509.5	348.3	268.8	255.6
65°	572.5	437.9	288.7	232.3	227.2
67.5°	506.1	371.6	232.3	204.1	199.1
70°	436.4	307.0	192.4	175.9	169.1
72.5°	370.1	247.2	160.9	147.7	144.4
75°	305.2	189.1	132.7	121.1	119.6
77.5°	240.7	134.3	104.6	97.9	94.5
80°	180.8	96.3	79.5	73.1	73.1
82.5°	126.1	64.8	54.8	51.3	51.3
85°	71.3	36.5	31.5	31.5	31.5
87.5°	26.6	13.2	13.2	11.6	11.6
90°	0.8	9.8	16.2	20.4	21.8
92.5°	20.4	17.1	19.5	21.2	21.8
95°	52.8	26.0	31.6	35.8	34.9
97.5°	95.0	28.5	41.4	43.9	44.7
100°	143.8	32.5	46.4	52.8	54.5
102.5°	197.4	195.8	47.9	56.8	59.3
105°	247.0	271.4	49.6	58.4	61.8
107.5°	304.6	324.9	51.2	60.1	63.4
110°	360.0	376.9	142.2	61.0	64.2



TEST NUMBER: P910485

CATALOG NUMBER: DFN2DIP-4P4F0-040D030US850-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	412.0	426.5	412.8	62.5	65.0
115°	467.1	481.0	501.3	125.1	66.7
117.5°	515.1	531.3	545.2	429.0	216.1
120°	568.7	580.9	595.5	605.3	495.6
122.5°	614.2	627.3	643.6	648.3	649.2
125°	660.5	671.1	686.6	692.2	694.7
127.5°	702.8	714.1	726.4	734.5	735.3
130°	742.6	755.7	764.5	773.4	772.8
132.5°	783.2	793.8	802.7	810.0	809.2
135°	817.3	830.4	837.6	845.8	844.2
137.5°	853.0	862.8	871.0	879.1	876.7
140°	888.0	894.5	903.4	910.7	906.7
142.5°	917.4	923.0	933.6	940.0	936.0
145°	948.2	947.3	961.2	966.8	962.7
147.5°	974.9	972.5	986.3	990.3	987.1
150°	1001.0	995.3	1008.3	1013.1	1009.1
152.5°	1022.8	1016.4	1028.6	1033.5	1027.8
155°	1044.0	1036.8	1046.5	1051.3	1044.9
157.5°	1061.1	1054.7	1062.0	1067.6	1061.1
160°	1075.7	1070.9	1075.7	1080.6	1074.8
162.5°	1088.7	1083.8	1087.9	1093.6	1086.3
165°	1100.0	1095.2	1097.7	1103.3	1097.7
167.5°	1109.0	1104.1	1106.6	1112.3	1105.0
170°	1116.3	1111.4	1113.1	1118.8	1111.4
172.5°	1121.2	1116.3	1118.0	1123.6	1116.3
175°	1125.2	1119.5	1121.2	1126.9	1118.8
177.5°	1126.9	1121.2	1122.1	1127.7	1120.4
180°	1122.9	1122.9	1122.9	1122.9	1122.9

TEST NUMBER: P910485

CATALOG NUMBER: DFN2DIP-4P4F0-040D030US850-RLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.08	8.94	9.02	9.89	11.11	4.04	4.90	4.98	5.85	7.07
	3H	9.77	10.53	10.71	11.49	12.74	5.23	6.00	6.18	6.96	8.21
	4H	10.38	11.11	11.34	12.07	13.32	5.69	6.41	6.65	7.37	8.63
	6H	10.81	11.48	11.78	12.44	13.71	6.01	6.68	6.98	7.65	8.92
	8H	10.94	11.57	11.92	12.56	13.82	6.10	6.74	7.08	7.72	8.99
	12H	11.00	11.61	11.99	12.58	13.88	6.15	6.75	7.13	7.73	9.02
4H	2H	8.10	8.83	9.07	9.79	11.05	4.64	5.37	5.61	6.33	7.59
	3H	9.94	10.54	10.92	11.53	12.81	6.00	6.60	6.97	7.59	8.86
	4H	10.64	11.19	11.62	12.17	13.47	6.55	7.10	7.53	8.08	9.38
	6H	11.16	11.63	12.16	12.64	13.94	6.97	7.45	7.97	8.45	9.75
	8H	11.34	11.78	12.34	12.78	14.09	7.10	7.54	8.10	8.55	9.85
	12H	11.44	11.84	12.46	12.86	14.17	7.17	7.57	8.19	8.59	9.90
8H	4H	10.61	11.05	11.61	12.05	13.36	6.84	7.28	7.83	8.28	9.59
	6H	11.18	11.55	12.20	12.59	13.90	7.36	7.72	8.38	8.77	10.07
	8H	11.40	11.72	12.43	12.75	14.08	7.55	7.87	8.58	8.90	10.23
	12H	11.55	11.83	12.58	12.85	14.22	7.67	7.95	8.70	8.98	10.35
12H	4H	10.56	10.96	11.58	11.98	13.29	6.84	7.24	7.86	8.26	9.57
	6H	11.16	11.48	12.19	12.51	13.83	7.41	7.73	8.44	8.76	10.08
	8H	11.38	11.67	12.42	12.69	14.06	7.62	7.90	8.66	8.93	10.30