

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P910553

Luminaire Tested: DFN2DIP-4P4F0-060D080US850-RLONL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P910553  
REPORT IS A COMBINATION OF REPORTS P900666 AND P897523  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-4P4F0-060D080US850-RLLONL  
Description: 4 foot, 90deg - 4way Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 14439.2 lumens  
Efficiency: N/A  
Efficacy: 107.0 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular w/ Sides (W: 4.07' x L: 4.07' x H: 0.1')  
CIE Type: Semi-Indirect  
  
Input Watts (W): 135  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9933  
Total Harmonic Distortion (THDi): 0.066  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P910553  
CATALOG NUMBER: DFN2DIP-4P4F0-060D080US850-RLLONL

### Luminous Intensity Polar Plot

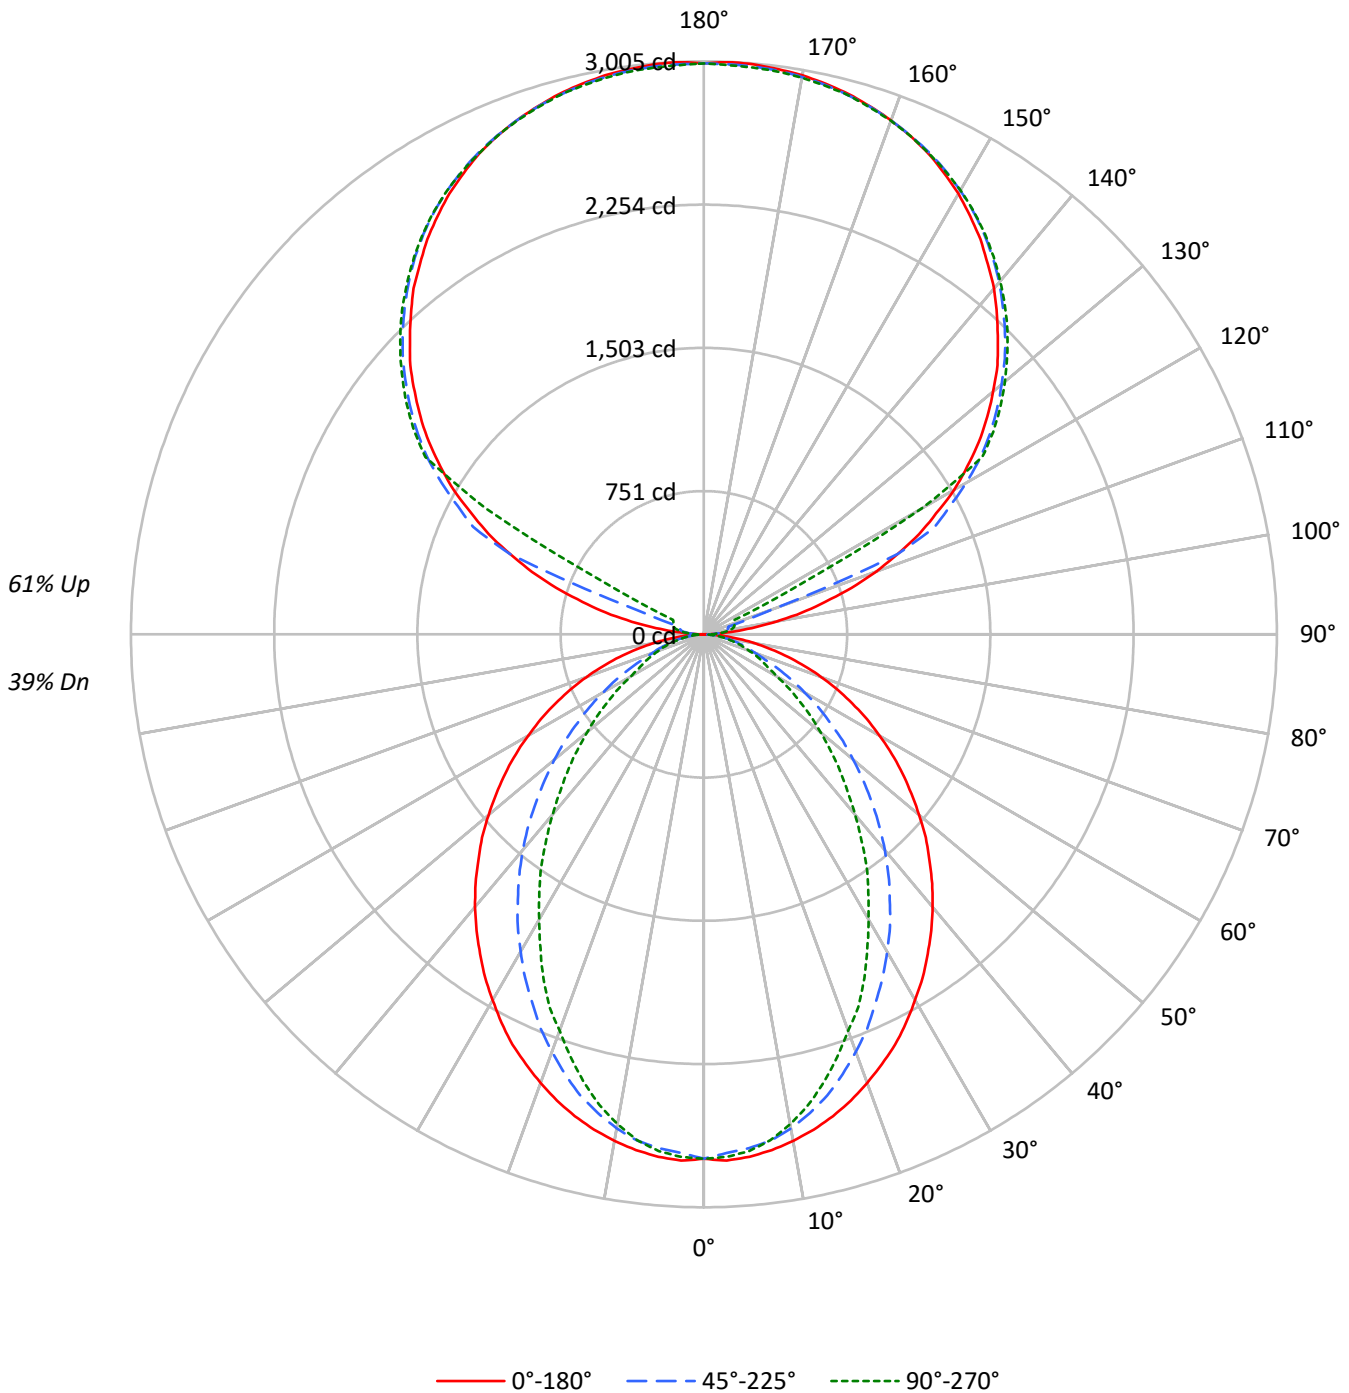



TEST NUMBER: P910553

CATALOG NUMBER: DFN2DIP-4P4F0-060D080US850-RLLONL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	105	105	105	105	95	95	95	95	77	77	77	61	61	61	46	46	46	39			
1	96	92	88	85	87	83	80	78	68	66	64	54	53	52	41	41	40	34			
2	87	80	75	70	79	73	68	64	60	57	54	48	46	44	37	35	34	29			
3	80	71	64	58	73	65	59	54	53	49	46	43	40	37	33	31	29	25			
4	73	63	55	50	67	58	51	46	48	43	39	38	35	32	30	27	26	22			
5	67	56	48	43	61	52	45	40	43	38	34	35	31	28	27	25	23	19			
6	62	51	43	37	56	46	40	35	39	34	30	31	28	25	25	22	20	17			
7	57	46	38	33	52	42	35	31	35	30	26	29	25	22	23	20	18	15			
8	53	42	34	29	49	38	32	27	32	27	23	26	22	20	21	18	16	14			
9	50	38	31	26	45	35	29	24	29	24	21	24	20	18	19	17	15	12			
10	46	35	28	23	42	32	26	22	27	22	19	22	19	16	18	15	13	11			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1784	1784	1784
5°	1787	1756	1768
10°	1770	1722	1711
15°	1745	1666	1622
20°	1713	1588	1514
25°	1680	1501	1409
30°	1636	1411	1276
35°	1593	1314	1159
40°	1549	1214	1024
45°	1498	1103	903
50°	1445	991	783
55°	1390	872	669
60°	1326	746	551
65°	1252	619	497
70°	1163	500	451
75°	1051	442	412
80°	889	372	359
85°	621	252	274

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 90°  
 Luminance: 1543 cd/sqm



TEST NUMBER: P910553

CATALOG NUMBER: DFN2DIP-4P4F0-060D080US850-RLLONL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	257.7	1.8
10°-20°	707.6	4.9
20°-30°	993.4	6.9
30°-40°	1082.8	7.5
40°-50°	995.2	6.9
50°-60°	781.6	5.4
60°-70°	508.8	3.5
70°-80°	261.9	1.8
80°-90°	72.1	0.5
90°-100°	98.7	0.7
100°-110°	368.1	2.5
110°-120°	976.2	6.8
120°-130°	1619.0	11.2
130°-140°	1719.8	11.9
140°-150°	1598.3	11.1
150°-160°	1285.0	8.9
160°-170°	828.0	5.7
170°-180°	285.0	2.0
0°-30°	1958.7	13.6
0°-40°	3041.5	21.1
0°-60°	4818.4	33.4
0°-90°	5661.2	39.2
90°-120°	1442.9	10.0
90°-150°	6380.0	44.2
90°-180°	8778.0	60.8
0°-180°	14439.2	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	2750	2750	2750	2750	2750	
5°	2750	2738	2705	2728	2720	261
15°	2616	2588	2504	2456	2432	737
25°	2374	2295	2130	2028	1991	1092
35°	2046	1919	1700	1543	1488	1281
45°	1672	1506	1244	1068	1008	1292
55°	1272	1078	809	660	612	1136
65°	859	657	433	349	341	851
75°	458	284	199	182	179	484
85°	107	55	47	47	47	123
90°	2	26	43	54	58	13
95°	141	69	84	96	93	167
105°	659	724	132	156	165	704
115°	1246	1283	1337	334	178	1226
125°	1761	1790	1831	1846	1852	1571
135°	2180	2214	2234	2256	2251	1684
145°	2528	2526	2563	2578	2567	1581
155°	2784	2765	2791	2804	2786	1283
165°	2934	2921	2927	2942	2927	829
175°	3001	2985	2990	3005	2983	286
180°	2994	2994	2994	2994	2994	



TEST NUMBER: P910553

CATALOG NUMBER: DFN2DIP-4P4F0-060D080US850-RLLONL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	2750.1	2750.1	2750.1	2750.1	2750.1
2.5°	2762.5	2750.1	2722.6	2747.7	2742.7
5°	2750.1	2737.7	2705.2	2727.7	2720.3
7.5°	2727.7	2712.8	2678.0	2687.8	2675.4
10°	2697.8	2680.3	2630.8	2623.1	2608.3
12.5°	2660.6	2638.1	2570.8	2556.0	2528.5
15°	2615.7	2588.2	2503.7	2456.4	2431.6
17.5°	2563.5	2523.5	2419.0	2364.3	2324.5
20°	2503.7	2453.8	2329.5	2267.4	2212.5
22.5°	2439.0	2381.7	2237.3	2152.8	2115.5
25°	2374.4	2294.6	2130.4	2028.5	1991.0
27.5°	2297.3	2212.5	2030.8	1913.8	1856.6
30°	2215.1	2120.3	1921.2	1794.5	1727.2
32.5°	2135.4	2020.8	1817.0	1667.5	1605.2
35°	2045.9	1918.9	1700.0	1543.1	1488.2
37.5°	1958.7	1821.6	1590.4	1418.5	1356.4
40°	1866.6	1717.4	1475.7	1299.1	1234.4
42.5°	1772.1	1612.8	1361.4	1177.1	1115.1
45°	1672.5	1505.6	1244.5	1067.5	1007.9
47.5°	1578.0	1401.3	1132.5	955.6	901.0
50°	1473.4	1296.8	1022.9	851.0	799.0
52.5°	1371.2	1184.5	918.4	754.1	706.9
55°	1271.7	1077.6	808.8	659.6	612.3
57.5°	1169.8	970.6	711.9	572.5	532.5
60°	1065.2	866.1	609.7	483.0	443.0
62.5°	963.3	764.2	522.6	403.2	383.4
65°	858.7	657.0	433.1	348.6	340.9
67.5°	759.1	557.4	348.6	306.1	298.7
70°	654.5	460.5	288.6	263.8	253.7
72.5°	555.1	370.7	241.3	221.6	216.5
75°	457.9	283.6	199.1	181.7	179.3
77.5°	361.0	201.5	156.8	146.8	141.8
80°	271.2	144.4	119.3	109.6	109.6
82.5°	189.1	97.1	82.1	77.1	77.1
85°	106.9	54.7	47.2	47.2	47.2
87.5°	39.9	19.9	19.9	17.4	17.4
90°	2.1	26.0	43.3	54.2	58.4
92.5°	54.2	45.6	52.0	56.3	58.4
95°	140.7	69.2	84.4	95.5	93.2
97.5°	253.4	75.9	110.3	117.1	119.1
100°	383.6	86.7	123.5	140.7	145.1
102.5°	526.4	522.2	127.9	151.5	158.3
105°	658.6	723.7	132.2	155.9	164.7
107.5°	812.5	866.5	136.6	160.3	169.0
110°	960.0	1005.2	379.3	162.6	171.1



TEST NUMBER: P910553

CATALOG NUMBER: DFN2DIP-4P4F0-060D080US850-RLLONL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	1098.6	1137.4	1100.7	166.7	173.4
115°	1245.7	1282.6	1336.8	333.7	177.8
117.5°	1373.6	1416.9	1453.9	1143.8	576.3
120°	1516.7	1549.1	1588.2	1614.1	1321.6
122.5°	1637.8	1672.6	1716.1	1728.9	1731.3
125°	1761.3	1789.6	1830.7	1845.9	1852.4
127.5°	1874.0	1904.4	1937.1	1958.6	1960.7
130°	1980.2	2014.9	2038.7	2062.6	2060.5
132.5°	2088.6	2116.9	2140.6	2160.1	2158.0
135°	2179.6	2214.3	2233.6	2255.6	2251.2
137.5°	2274.9	2300.8	2322.7	2344.3	2337.9
140°	2367.9	2385.5	2409.2	2428.7	2417.8
142.5°	2446.2	2461.3	2489.4	2506.7	2495.8
145°	2528.5	2526.2	2563.0	2578.2	2567.3
147.5°	2599.8	2593.4	2630.1	2641.0	2632.4
150°	2669.3	2654.1	2688.8	2701.6	2690.9
152.5°	2727.7	2710.4	2742.8	2756.0	2740.8
155°	2784.0	2764.7	2790.7	2803.6	2786.4
157.5°	2829.5	2812.3	2831.8	2847.0	2829.5
160°	2868.7	2855.6	2868.7	2881.5	2866.3
162.5°	2903.1	2890.3	2901.0	2916.2	2896.7
165°	2933.5	2920.7	2927.1	2942.2	2927.1
167.5°	2957.4	2944.3	2950.9	2966.1	2946.6
170°	2977.0	2963.8	2968.2	2983.4	2963.8
172.5°	2989.9	2977.0	2981.3	2996.5	2977.0
175°	3000.6	2985.4	2989.9	3004.9	2983.4
177.5°	3004.9	2989.9	2992.1	3007.3	2987.8
180°	2994.2	2994.2	2994.2	2994.2	2994.2



TEST NUMBER: P910553  
 CATALOG NUMBER: DFN2DIP-4P4F0-060D080US850-RLLONL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.08	8.83	9.13	9.88	11.30	4.04	4.79	5.09	5.84	7.26
	3H	9.76	10.43	10.82	11.49	12.92	5.22	5.89	6.28	6.95	8.39
	4H	10.36	11.00	11.44	12.06	13.51	5.67	6.31	6.74	7.37	8.81
	6H	10.79	11.37	11.87	12.44	13.89	5.99	6.57	7.07	7.64	9.10
	8H	10.91	11.47	12.00	12.55	14.00	6.08	6.63	7.16	7.72	9.17
	12H	10.98	11.50	12.06	12.58	14.05	6.12	6.65	7.21	7.72	9.20
4H	2H	8.09	8.72	9.17	9.78	11.23	4.63	5.26	5.71	6.32	7.77
	3H	9.92	10.44	11.00	11.53	12.99	5.97	6.50	7.06	7.59	9.05
	4H	10.61	11.09	11.70	12.17	13.65	6.52	7.00	7.61	8.08	9.56
	6H	11.13	11.54	12.22	12.64	14.12	6.94	7.35	8.04	8.45	9.93
	8H	11.30	11.69	12.40	12.78	14.27	7.07	7.45	8.16	8.55	10.04
	12H	11.40	11.75	12.51	12.85	14.35	7.13	7.48	8.24	8.59	10.08
8H	4H	10.57	10.96	11.67	12.05	13.54	6.80	7.18	7.90	8.28	9.77
	6H	11.14	11.46	12.26	12.60	14.08	7.32	7.63	8.44	8.77	10.26
	8H	11.36	11.64	12.49	12.76	14.26	7.51	7.79	8.63	8.91	10.41
	12H	11.50	11.75	12.63	12.86	14.40	7.62	7.87	8.75	8.98	10.53
12H	4H	10.52	10.87	11.63	11.98	13.47	6.80	7.15	7.91	8.26	9.75
	6H	11.12	11.40	12.24	12.51	14.02	7.37	7.65	8.49	8.76	10.27
	8H	11.34	11.58	12.47	12.70	14.24	7.57	7.82	8.70	8.94	10.48