

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P913222

Luminaire Tested: DFN2DIP-4P4F0-040D060US927-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P913222
REPORT IS A COMBINATION OF REPORTS P899117 AND P895967
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P4F0-040D060US927-FLLFLL
Description: 4 foot, 90deg - 4way Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7343.5 lumens
Efficiency: N/A
Efficacy: 82.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 4.07' x L: 4.07' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 89.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P913222
CATALOG NUMBER: DFN2DIP-4P4F0-040D060US927-FLLFL

Luminous Intensity Polar Plot

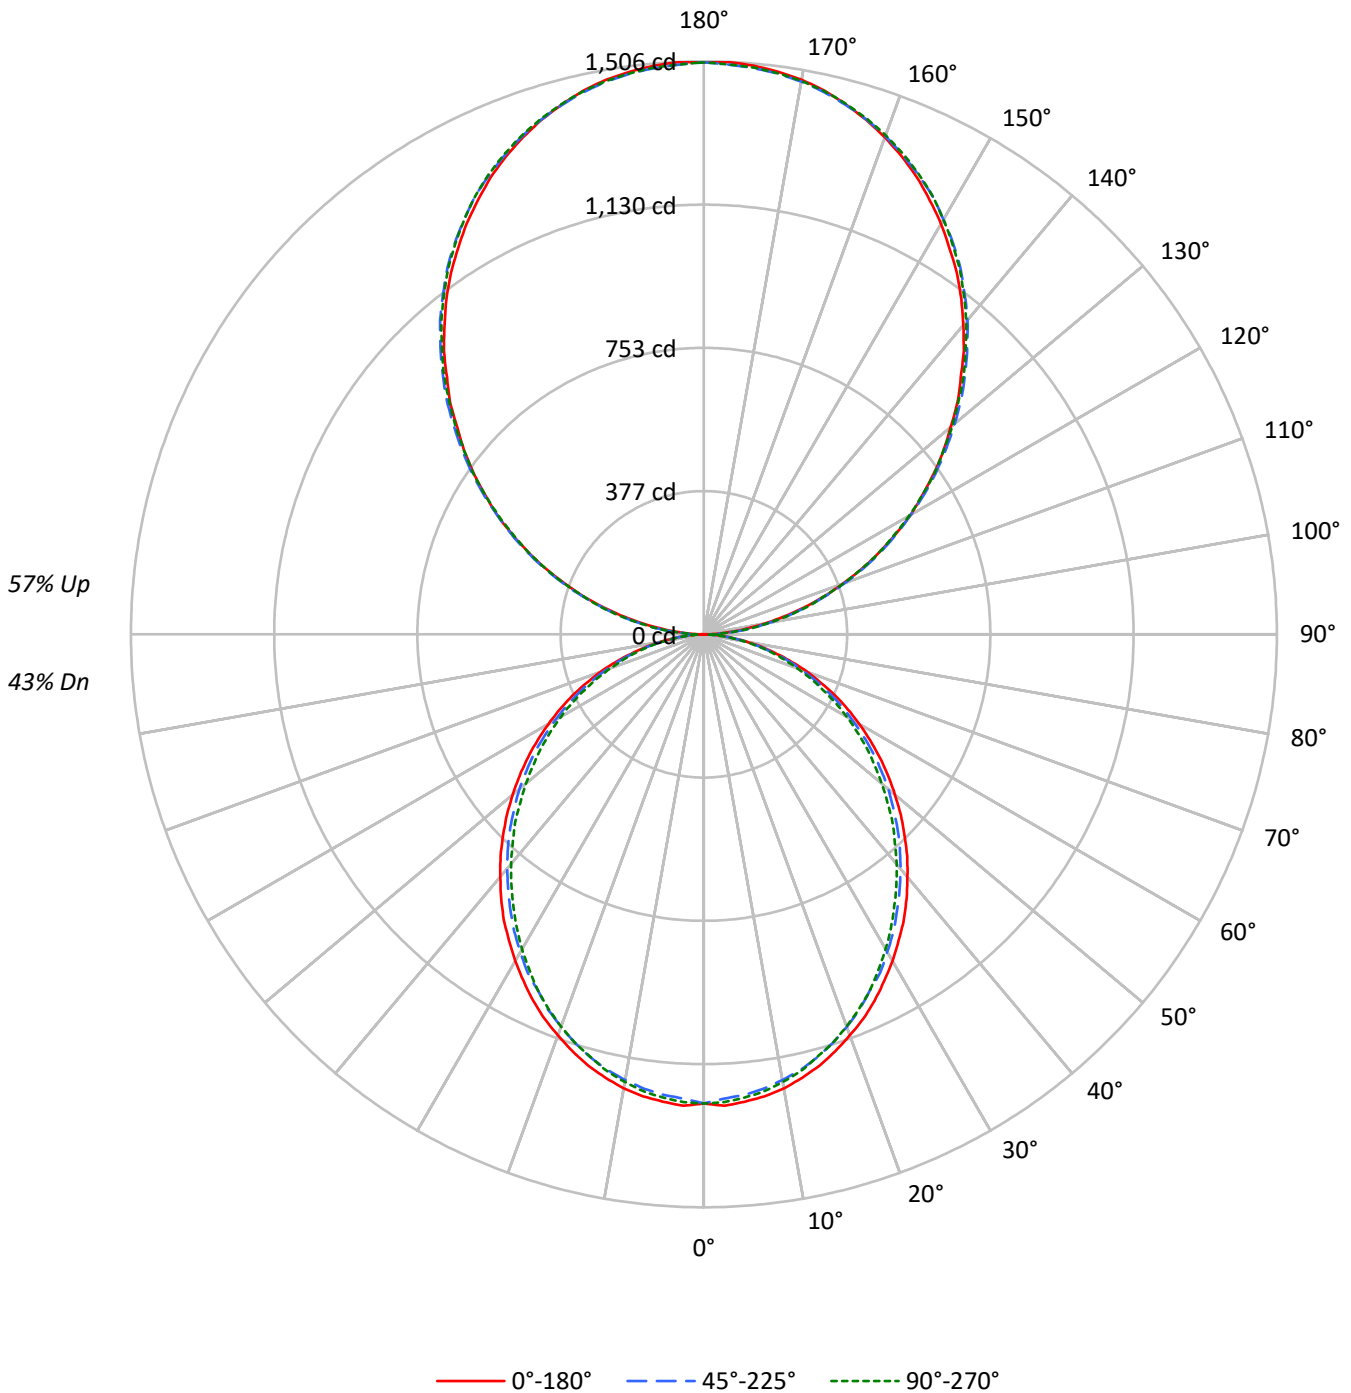



TEST NUMBER: P913222

CATALOG NUMBER: DFN2DIP-4P4F0-040D060US927-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	105	105	105	105	96	96	96	96	79	79	79	64	64	64	49	49	49	49	49	49	43
1	96	92	88	85	88	84	81	78	69	67	65	56	54	53	44	43	42	44	43	42	36
2	88	80	74	69	80	73	68	64	61	57	54	49	47	44	38	37	35	38	37	35	30
3	80	70	63	57	73	65	58	53	54	49	45	44	40	37	34	32	30	34	32	30	26
4	73	62	55	49	66	57	50	45	48	43	39	39	35	32	30	28	26	30	28	26	22
5	67	56	47	42	61	51	44	39	43	37	33	35	31	28	27	25	22	27	25	22	19
6	62	50	42	36	56	46	39	34	38	33	29	31	27	24	25	22	20	25	22	20	17
7	57	45	37	31	52	41	34	29	35	29	25	29	24	21	23	20	18	23	20	18	15
8	53	41	33	28	48	38	31	26	32	26	23	26	22	19	21	18	16	21	18	16	13
9	49	37	30	25	45	34	28	23	29	24	20	24	20	17	19	16	14	19	16	14	12
10	46	34	27	22	42	31	25	21	27	22	18	22	18	15	18	15	13	18	15	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	800	800	800
5°	801	789	794
10°	795	779	784
15°	783	766	767
20°	767	749	750
25°	752	727	731
30°	732	708	706
35°	714	685	679
40°	691	661	654
45°	668	638	629
50°	643	614	599
55°	617	585	571
60°	587	551	540
65°	555	517	503
70°	514	474	464
75°	457	423	428
80°	389	359	358
85°	282	247	241

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 90°
 Luminance: 1136 cd/sqm



TEST NUMBER: P913222

CATALOG NUMBER: DFN2DIP-4P4F0-040D060US927-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	116.0	1.6
10°-20°	326.5	4.4
20°-30°	479.8	6.5
30°-40°	557.3	7.6
40°-50°	556.6	7.6
50°-60°	485.3	6.6
60°-70°	358.8	4.9
70°-80°	203.0	2.8
80°-90°	57.8	0.8
90°-100°	93.0	1.3
100°-110°	295.6	4.0
110°-120°	505.8	6.9
120°-130°	665.2	9.1
130°-140°	746.6	10.2
140°-150°	732.2	10.0
150°-160°	614.2	8.4
160°-170°	407.3	5.5
170°-180°	142.4	1.9
0°-30°	922.4	12.6
0°-40°	1479.7	20.1
0°-60°	2521.7	34.3
0°-90°	3141.3	42.8
90°-120°	894.4	12.2
90°-150°	3038.4	41.4
90°-180°	4202.0	57.2
0°-180°	7343.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1233	1233	1233	1233	1233	
5°	1233	1228	1215	1225	1222	117
15°	1174	1167	1151	1156	1150	331
25°	1062	1053	1033	1035	1033	489
35°	916	905	886	878	873	572
45°	746	738	720	707	702	576
55°	564	557	543	529	523	505
65°	381	373	362	351	345	376
75°	199	197	191	184	186	213
85°	49	48	46	43	42	54
90°	1	16	44	42	43	7
95°	66	79	81	81	79	74
105°	273	276	279	282	282	288
115°	508	515	512	511	508	502
125°	738	750	746	742	740	660
135°	955	969	972	970	967	738
145°	1159	1168	1176	1177	1172	724
155°	1326	1329	1333	1340	1336	610
165°	1442	1441	1441	1450	1443	407
175°	1500	1497	1494	1503	1496	143
180°	1503	1503	1503	1503	1503	



TEST NUMBER: P913222

CATALOG NUMBER: DFN2DIP-4P4F0-040D060US927-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1233.0	1233.0	1233.0	1233.0	1233.0
2.5°	1240.2	1234.2	1221.1	1233.0	1230.7
5°	1233.0	1228.3	1215.2	1224.6	1222.4
7.5°	1224.6	1217.6	1204.5	1214.1	1211.7
10°	1211.7	1203.4	1189.2	1198.6	1195.1
12.5°	1193.8	1186.8	1172.6	1178.5	1176.1
15°	1173.7	1166.6	1151.2	1156.0	1150.1
17.5°	1148.8	1141.8	1126.3	1132.2	1126.3
20°	1121.5	1114.4	1097.9	1101.4	1096.8
22.5°	1094.3	1083.6	1068.2	1068.2	1065.8
25°	1062.2	1052.8	1032.7	1035.0	1032.7
27.5°	1026.7	1018.3	1003.1	999.5	993.6
30°	991.2	981.7	963.9	960.4	955.6
32.5°	953.2	946.2	927.2	920.0	915.2
35°	916.5	904.7	885.7	878.5	872.6
37.5°	875.0	864.3	845.3	837.0	831.1
40°	832.3	822.8	803.7	793.2	788.5
42.5°	790.8	781.2	762.4	750.4	743.4
45°	745.8	737.5	719.6	706.7	701.9
47.5°	701.9	693.6	674.6	661.6	654.5
50°	655.6	649.7	633.1	616.5	610.5
52.5°	610.5	602.3	586.9	573.9	565.5
55°	564.4	557.2	543.0	528.8	522.9
57.5°	518.1	512.2	496.7	482.5	477.8
60°	471.8	467.1	450.6	437.5	434.0
62.5°	426.8	418.5	406.7	394.8	390.1
65°	380.6	373.4	361.6	350.9	345.1
67.5°	333.2	327.2	316.6	308.3	303.6
70°	289.3	284.6	273.9	265.5	260.9
72.5°	244.3	239.5	233.6	225.3	221.7
75°	199.2	196.9	190.8	183.8	186.2
77.5°	158.8	154.1	151.7	148.1	144.7
80°	118.6	117.3	114.9	111.5	109.1
82.5°	80.6	80.6	79.5	74.7	74.7
85°	48.6	47.5	46.3	42.6	41.5
87.5°	21.4	19.0	16.6	13.1	11.8
90°	1.3	16.3	44.4	41.7	43.0
92.5°	28.1	38.1	39.5	40.8	40.8
95°	66.1	78.8	81.1	81.1	78.8
97.5°	110.1	121.9	126.9	126.9	126.9
100°	160.9	171.3	174.9	174.9	173.6
102.5°	214.4	222.0	227.0	228.4	227.0
105°	272.8	276.5	279.2	281.5	281.5
107.5°	330.8	336.3	336.3	337.2	330.8
110°	387.1	394.3	394.3	394.3	390.6



TEST NUMBER: P913222

CATALOG NUMBER: DFN2DIP-4P4F0-040D060US927-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	447.7	455.4	454.1	450.4	447.7
115°	507.6	514.8	512.5	511.2	507.6
117.5°	567.0	576.9	570.5	567.0	563.3
120°	626.8	636.8	626.8	626.8	622.7
122.5°	681.1	693.8	687.5	683.9	681.1
125°	738.2	749.6	745.9	741.9	740.5
127.5°	794.0	808.0	803.0	797.6	794.0
130°	846.1	862.4	860.2	857.5	852.5
132.5°	904.6	917.3	918.1	911.8	908.2
135°	954.9	968.9	971.6	970.3	966.6
137.5°	1011.1	1022.4	1024.7	1023.7	1018.3
140°	1060.5	1071.8	1078.2	1078.2	1073.2
142.5°	1111.2	1122.5	1126.2	1127.5	1122.5
145°	1159.3	1168.3	1175.6	1176.9	1172.0
147.5°	1202.3	1213.6	1219.1	1221.3	1216.3
150°	1246.7	1254.4	1259.4	1263.4	1259.4
152.5°	1286.1	1293.9	1300.2	1305.2	1300.2
155°	1325.6	1329.2	1333.2	1339.7	1335.5
157.5°	1359.5	1362.3	1364.5	1373.6	1367.3
160°	1390.0	1392.7	1394.0	1401.7	1396.3
162.5°	1418.0	1418.0	1419.4	1428.0	1421.6
165°	1442.0	1440.7	1440.7	1449.8	1443.4
167.5°	1463.8	1459.8	1459.8	1468.8	1462.4
170°	1480.1	1476.5	1475.1	1484.2	1476.5
172.5°	1491.4	1487.8	1486.4	1495.5	1487.8
175°	1500.5	1496.9	1494.1	1503.2	1495.5
177.5°	1505.5	1501.9	1499.1	1506.8	1499.1
180°	1503.2	1503.2	1503.2	1503.2	1503.2



TEST NUMBER: P913222
 CATALOG NUMBER: DFN2DIP-4P4F0-040D060US927-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.81	6.61	6.82	7.63	9.00	5.36	6.16	6.38	7.19	8.56
	3H	7.47	8.18	8.49	9.22	10.61	6.98	7.69	8.00	8.73	10.12
	4H	8.06	8.74	9.10	9.77	11.17	7.56	8.24	8.60	9.28	10.68
	6H	8.46	9.08	9.51	10.12	11.54	7.96	8.58	9.01	9.62	11.04
	8H	8.56	9.16	9.62	10.22	11.62	8.06	8.66	9.12	9.71	11.12
	12H	8.61	9.18	9.67	10.23	11.66	8.10	8.67	9.16	9.72	11.15
4H	2H	6.26	6.94	7.31	7.98	9.38	5.91	6.59	6.95	7.62	9.02
	3H	8.13	8.69	9.18	9.76	11.17	7.72	8.29	8.77	9.35	10.76
	4H	8.84	9.36	9.90	10.42	11.85	8.42	8.94	9.48	10.00	11.43
	6H	9.36	9.81	10.43	10.89	12.32	8.93	9.38	10.00	10.46	11.88
	8H	9.51	9.93	10.58	11.00	12.44	9.07	9.49	10.14	10.56	12.01
	12H	9.59	9.96	10.67	11.05	12.50	9.14	9.51	10.22	10.60	12.05
8H	4H	9.04	9.45	10.11	10.53	11.97	8.66	9.08	9.73	10.15	11.59
	6H	9.67	10.02	10.76	11.13	12.57	9.29	9.63	10.38	10.75	12.19
	8H	9.90	10.20	11.00	11.29	12.76	9.50	9.81	10.60	10.90	12.36
	12H	10.03	10.29	11.13	11.39	12.89	9.62	9.88	10.72	10.98	12.48
12H	4H	9.02	9.40	10.11	10.48	11.93	8.65	9.03	9.74	10.12	11.56
	6H	9.70	10.00	10.80	11.10	12.56	9.33	9.63	10.43	10.73	12.19
	8H	9.94	10.21	11.05	11.30	12.80	9.56	9.83	10.67	10.92	12.42