

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P913285

Luminaire Tested: DFN2DIP-4P4F0-070D030US927-RLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P913285
REPORT IS A COMBINATION OF REPORTS P900608 AND P897523
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P4F0-070D030US927-RLLONL
Description: 4 foot, 90deg - 4way Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7066.2 lumens
Efficiency: N/A
Efficacy: 72.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 4.07' x L: 4.07' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 97.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P913285

CATALOG NUMBER: DFN2DIP-4P4F0-070D030US927-RLLONL

Luminous Intensity Polar Plot

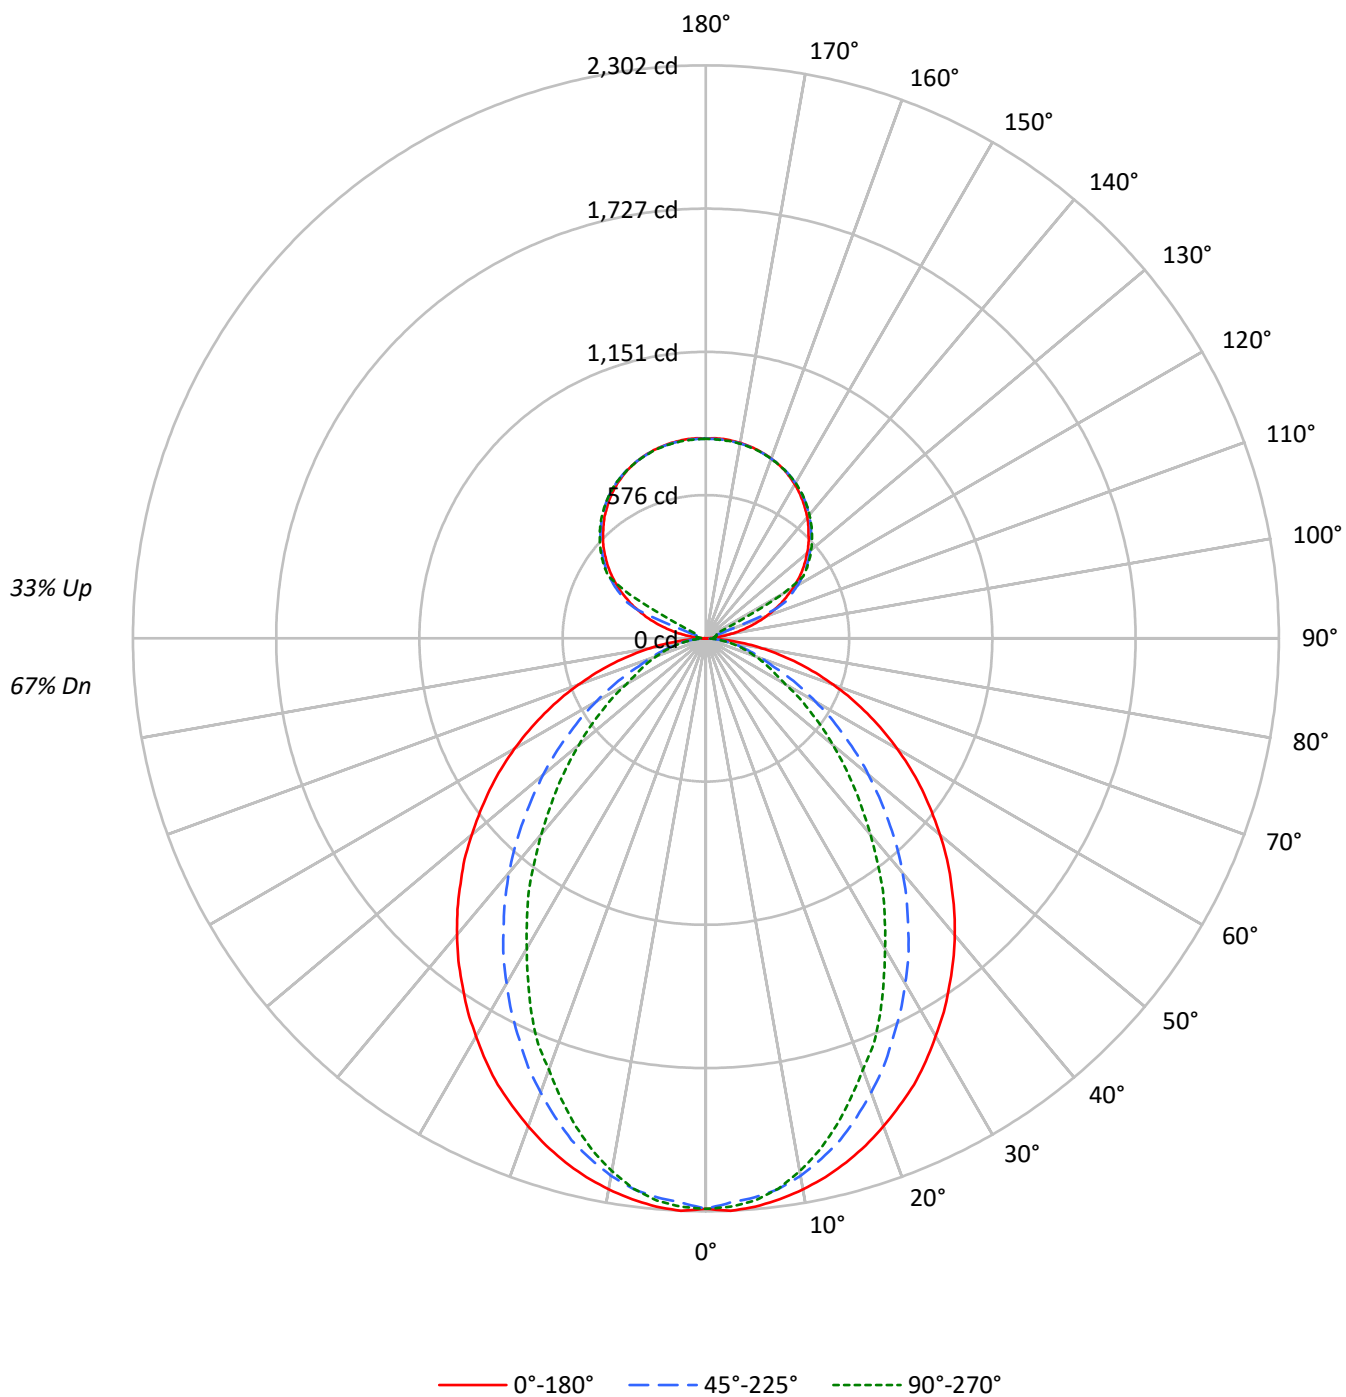

TEST NUMBER: P913285

CATALOG NUMBER: DFN2DIP-4P4F0-070D030US927-RLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	111	111	111	111	105	105	105	105	93	93	93	82	82	82	71	71	71
1	102	98	94	91	96	93	89	86	82	80	78	73	71	69	64	63	62
2	94	86	80	75	88	82	76	72	73	69	65	65	62	59	57	55	53
3	86	77	69	64	81	72	66	61	65	60	56	58	54	51	51	48	46
4	79	68	60	54	74	65	58	52	58	53	48	52	48	44	46	43	40
5	73	61	53	47	68	58	51	45	52	47	42	47	42	39	42	38	35
6	67	55	47	41	63	53	45	40	48	42	37	43	38	34	38	35	31
7	62	50	42	37	59	48	41	36	43	37	33	39	34	31	35	31	28
8	58	46	38	33	55	44	37	32	40	34	30	36	31	28	33	29	26
9	54	42	35	30	51	40	33	29	37	31	27	33	29	25	30	26	23
10	51	39	32	27	48	37	31	26	34	28	24	31	26	23	28	24	21

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1487	1487	1487
5°	1489	1464	1473
10°	1475	1435	1426
15°	1454	1388	1352
20°	1428	1323	1262
25°	1400	1251	1174
30°	1364	1176	1063
35°	1327	1095	966
40°	1291	1012	854
45°	1248	920	752
50°	1204	826	653
55°	1158	726	558
60°	1105	622	459
65°	1044	516	414
70°	969	416	376
75°	876	368	343
80°	741	311	299
85°	518	210	229

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1248 cd/sqm

TEST NUMBER: P913285

CATALOG NUMBER: DFN2DIP-4P4F0-070D030US927-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	214.8	3.0
10°-20°	589.7	8.3
20°-30°	827.9	11.7
30°-40°	902.4	12.8
40°-50°	829.4	11.7
50°-60°	651.4	9.2
60°-70°	424.0	6.0
70°-80°	218.2	3.1
80°-90°	57.1	0.8
90°-100°	26.5	0.4
100°-110°	98.6	1.4
110°-120°	261.5	3.7
120°-130°	433.7	6.1
130°-140°	460.7	6.5
140°-150°	428.1	6.1
150°-160°	344.2	4.9
160°-170°	221.8	3.1
170°-180°	76.3	1.1
0°-30°	1632.3	23.1
0°-40°	2534.7	35.9
0°-60°	4015.5	56.8
0°-90°	4714.9	66.7
90°-120°	386.5	5.5
90°-150°	1709.0	24.2
90°-180°	2351.0	33.3
0°-180°	7066.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2292	2292	2292	2292	2292	
5°	2292	2282	2254	2273	2267	217
15°	2180	2157	2086	2047	2026	614
25°	1979	1912	1775	1690	1659	910
35°	1705	1599	1417	1286	1240	1067
45°	1394	1255	1037	890	840	1076
55°	1060	898	674	550	510	947
65°	716	548	361	290	284	709
75°	382	236	166	151	149	404
85°	89	46	39	39	39	102
90°	1	7	12	15	16	7
95°	38	18	23	26	25	45
105°	176	194	35	42	44	188
115°	334	344	358	89	48	329
125°	472	479	490	494	496	421
135°	584	593	598	604	603	451
145°	677	677	687	691	688	424
155°	746	741	748	751	746	344
165°	786	782	784	788	784	222
175°	804	800	801	805	799	76
180°	802	802	802	802	802	

TEST NUMBER: P913285

CATALOG NUMBER: DFN2DIP-4P4F0-070D030US927-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2291.9	2291.9	2291.9	2291.9	2291.9
2.5°	2302.2	2291.9	2269.0	2289.9	2285.7
5°	2291.9	2281.5	2254.5	2273.2	2267.0
7.5°	2273.2	2260.8	2231.8	2239.9	2229.6
10°	2248.3	2233.8	2192.4	2186.0	2173.7
12.5°	2217.2	2198.5	2142.5	2130.1	2107.2
15°	2179.8	2157.0	2086.5	2047.2	2026.5
17.5°	2136.3	2103.1	2015.9	1970.3	1937.1
20°	2086.5	2044.9	1941.3	1889.6	1843.8
22.5°	2032.7	1984.9	1864.5	1794.1	1763.1
25°	1978.7	1912.2	1775.4	1690.4	1659.2
27.5°	1914.5	1843.8	1692.4	1595.0	1547.2
30°	1846.0	1767.0	1601.1	1495.5	1439.4
32.5°	1779.6	1684.1	1514.2	1389.6	1337.7
35°	1704.9	1599.1	1416.7	1286.0	1240.2
37.5°	1632.4	1518.1	1325.4	1182.1	1130.4
40°	1555.5	1431.2	1229.9	1082.7	1028.7
42.5°	1476.8	1344.1	1134.6	981.0	929.3
45°	1393.8	1254.7	1037.1	889.7	839.9
47.5°	1315.0	1167.8	943.8	796.4	750.8
50°	1227.9	1080.7	852.5	709.2	665.9
52.5°	1142.7	987.1	765.3	628.4	589.1
55°	1059.8	898.0	674.0	549.7	510.3
57.5°	974.9	808.9	593.3	477.1	443.9
60°	887.7	721.8	508.1	402.5	369.2
62.5°	802.7	636.8	435.5	336.0	319.5
65°	715.6	547.5	360.9	290.5	284.1
67.5°	632.6	464.5	290.5	255.0	248.9
70°	545.5	383.7	240.5	219.8	211.4
72.5°	462.6	309.0	201.1	184.7	180.5
75°	381.6	236.3	165.9	151.4	149.4
77.5°	300.8	167.9	130.7	122.3	118.2
80°	226.0	120.3	99.5	91.3	91.3
82.5°	157.6	81.0	68.4	64.2	64.2
85°	89.1	45.6	39.4	39.4	39.4
87.5°	33.2	16.5	16.5	14.5	14.5
90°	0.6	7.0	11.6	14.6	15.6
92.5°	14.6	12.2	13.9	15.1	15.6
95°	37.7	18.5	22.6	25.6	25.0
97.5°	67.9	20.4	29.5	31.4	31.9
100°	102.7	23.2	33.1	37.7	38.9
102.5°	141.0	139.9	34.2	40.6	42.4
105°	176.4	193.8	35.4	41.7	44.1
107.5°	217.6	232.1	36.6	42.9	45.3
110°	257.1	269.3	101.6	43.6	45.9

TEST NUMBER: P913285

CATALOG NUMBER: DFN2DIP-4P4F0-070D030US927-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	294.3	304.7	294.8	44.7	46.4
115°	333.7	343.6	358.1	89.4	47.6
117.5°	368.0	379.5	389.4	306.4	154.4
120°	406.2	414.9	425.4	432.4	354.0
122.5°	438.7	448.1	459.7	463.1	463.7
125°	471.8	479.3	490.4	494.5	496.2
127.5°	502.0	510.1	518.9	524.7	525.2
130°	530.4	539.8	546.1	552.5	552.0
132.5°	559.4	567.0	573.4	578.6	578.1
135°	583.8	593.2	598.3	604.2	603.0
137.5°	609.3	616.3	622.2	628.0	626.2
140°	634.3	639.0	645.3	650.5	647.7
142.5°	655.3	659.3	666.9	671.5	668.6
145°	677.3	676.7	686.6	690.6	687.7
147.5°	696.4	694.7	704.6	707.4	705.1
150°	715.0	711.0	720.3	723.7	720.8
152.5°	730.6	726.0	734.7	738.2	734.2
155°	745.8	740.6	747.5	751.0	746.4
157.5°	758.0	753.4	758.6	762.6	758.0
160°	768.4	764.9	768.4	771.9	767.8
162.5°	777.7	774.2	777.1	781.2	775.9
165°	785.8	782.4	784.1	788.1	784.1
167.5°	792.2	788.7	790.4	794.6	789.3
170°	797.4	793.9	795.1	799.2	793.9
172.5°	800.9	797.4	798.6	802.6	797.4
175°	803.7	799.7	800.9	804.9	799.2
177.5°	804.9	800.9	801.5	805.6	800.3
180°	802.1	802.1	802.1	802.1	802.1

TEST NUMBER: P913285

CATALOG NUMBER: DFN2DIP-4P4F0-070D030US927-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.98	10.97	10.79	11.79	12.80	5.94	6.93	6.75	7.75	8.77
	3H	11.67	12.56	12.49	13.39	14.43	7.14	8.03	7.96	8.86	9.90
	4H	12.29	13.13	13.13	13.97	15.02	7.60	8.43	8.44	9.28	10.33
	6H	12.73	13.50	13.58	14.34	15.41	7.93	8.70	8.78	9.55	10.61
	8H	12.86	13.59	13.72	14.46	15.53	8.03	8.76	8.88	9.62	10.69
	12H	12.93	13.63	13.79	14.49	15.58	8.08	8.77	8.94	9.63	10.72
4H	2H	10.02	10.85	10.86	11.69	12.74	6.56	7.39	7.40	8.23	9.29
	3H	11.87	12.56	12.72	13.43	14.50	7.92	8.62	8.78	9.49	10.56
	4H	12.57	13.20	13.43	14.07	15.17	8.48	9.11	9.34	9.98	11.08
	6H	13.10	13.64	13.98	14.54	15.64	8.91	9.45	9.79	10.35	11.45
	8H	13.28	13.79	14.16	14.68	15.79	9.04	9.55	9.93	10.44	11.55
	12H	13.39	13.84	14.29	14.75	15.87	9.12	9.57	10.02	10.48	11.60
8H	4H	12.55	13.06	13.43	13.95	15.06	8.77	9.28	9.66	10.17	11.28
	6H	13.13	13.54	14.04	14.48	15.59	9.30	9.72	10.21	10.65	11.76
	8H	13.35	13.72	14.27	14.64	15.77	9.49	9.87	10.42	10.79	11.92
	12H	13.50	13.82	14.42	14.74	15.92	9.62	9.95	10.54	10.87	12.05
12H	4H	12.51	12.96	13.41	13.87	14.99	8.79	9.24	9.69	10.15	11.27
	6H	13.10	13.47	14.02	14.40	15.53	9.35	9.72	10.27	10.65	11.78
	8H	13.33	13.66	14.26	14.58	15.76	9.57	9.90	10.49	10.82	12.00