

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P913304

Luminaire Tested: DFN2DIP-4P4F0-070D080US927-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P913304
REPORT IS A COMBINATION OF REPORTS P899148 AND P895967
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P4F0-070D080US927-RLLFLL
Description: 4 foot, 90deg - 4way Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 10322.1 lumens
Efficiency: N/A
Efficacy: 69.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 4.07' x L: 4.07' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 147.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P913304

CATALOG NUMBER: DFN2DIP-4P4F0-070D080US927-RLLFLL

Luminous Intensity Polar Plot

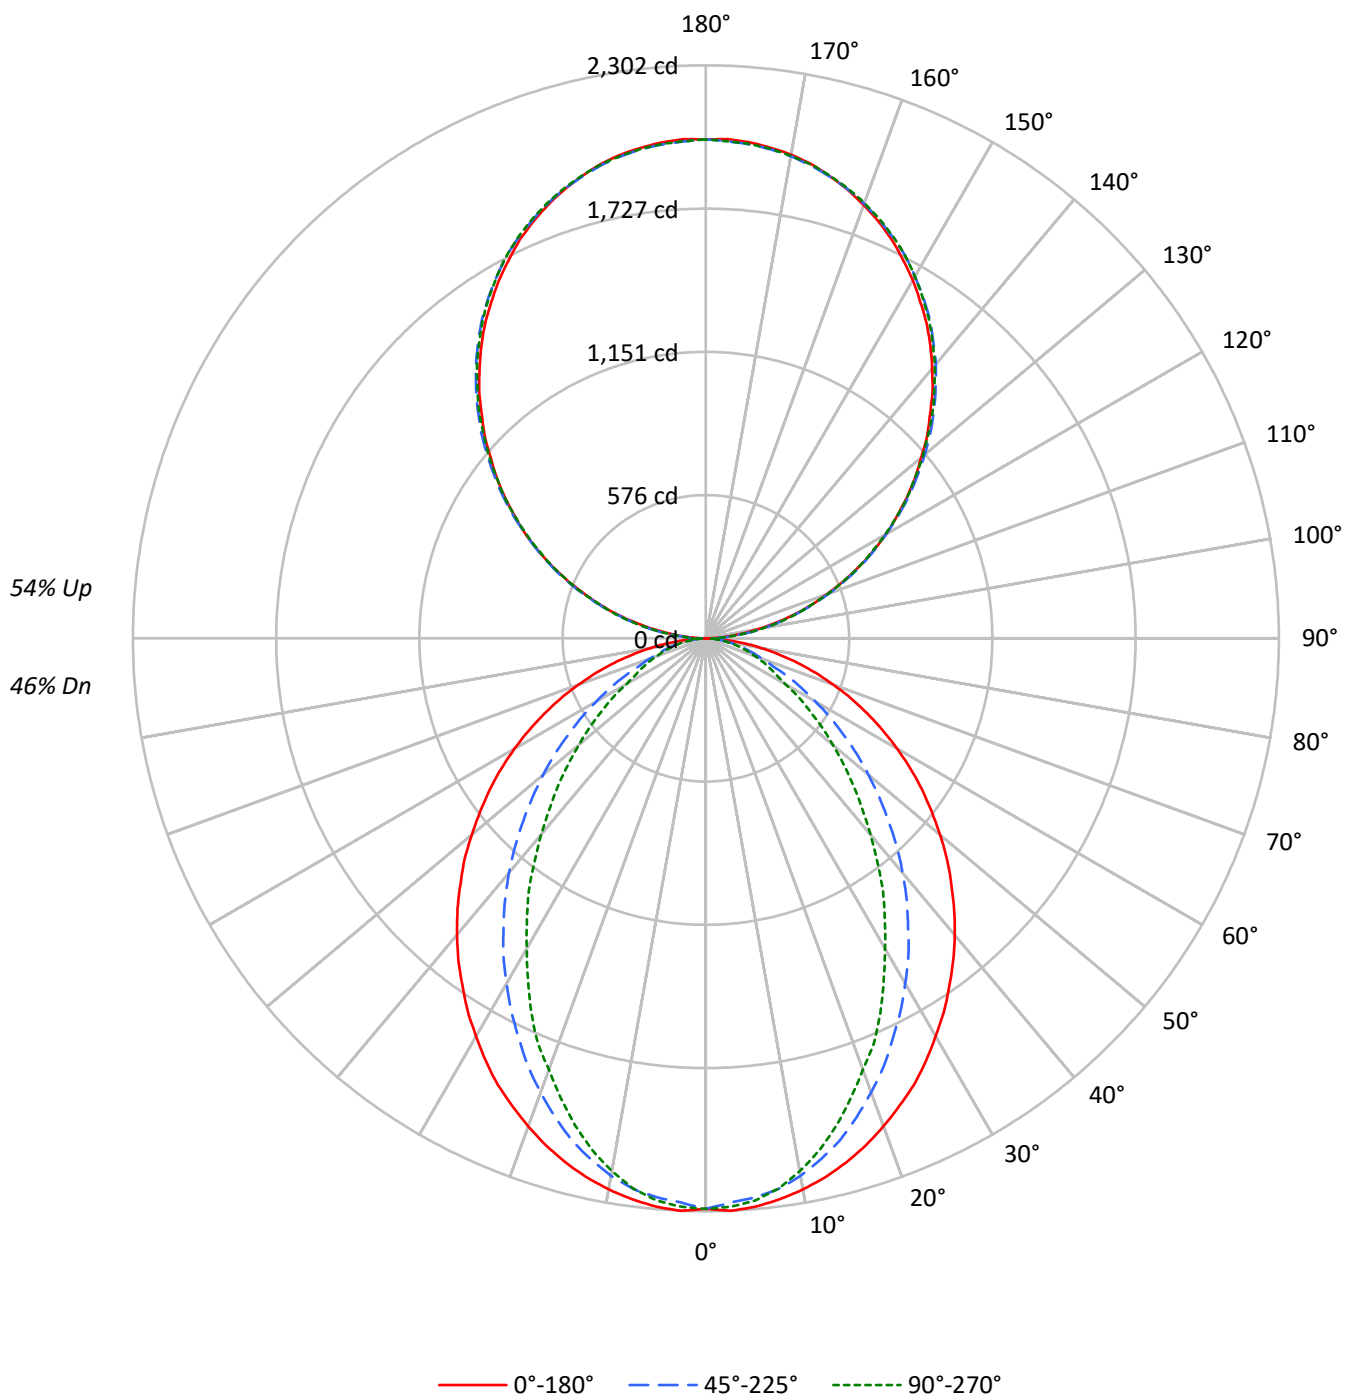

TEST NUMBER: P913304

CATALOG NUMBER: DFN2DIP-4P4F0-070D080US927-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	97	97	97	97	81	81	81	66	66	66	52	52	52
1	97	93	89	86	89	86	82	80	72	69	67	59	57	56	47	46	45
2	89	82	76	71	81	75	70	66	63	60	56	52	49	47	42	40	38
3	81	72	65	60	74	67	61	56	56	52	48	46	43	40	37	35	33
4	75	64	57	51	68	59	53	48	50	45	41	42	38	35	34	31	29
5	69	57	50	44	63	53	46	41	45	40	36	38	34	31	31	28	26
6	63	52	44	38	58	48	41	36	41	35	31	34	30	27	28	25	23
7	59	47	39	34	54	43	37	32	37	32	28	31	27	24	26	23	20
8	55	43	35	30	50	40	33	28	34	29	25	29	25	22	24	21	18
9	51	39	32	27	47	36	30	25	31	26	22	26	22	20	22	19	17
10	47	36	29	24	44	33	27	23	29	24	20	24	20	18	20	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1487	1487	1487
5°	1489	1464	1473
10°	1475	1435	1426
15°	1454	1388	1352
20°	1428	1323	1262
25°	1400	1251	1174
30°	1364	1176	1063
35°	1327	1095	966
40°	1291	1012	854
45°	1248	920	752
50°	1204	826	653
55°	1158	726	558
60°	1105	622	459
65°	1044	516	414
70°	969	416	376
75°	876	368	343
80°	741	311	299
85°	518	210	229

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1517 cd/sqm

TEST NUMBER: P913304

CATALOG NUMBER: DFN2DIP-4P4F0-070D080US927-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	214.8	2.1
10°-20°	589.7	5.7
20°-30°	827.9	8.0
30°-40°	902.4	8.7
40°-50°	829.4	8.0
50°-60°	651.4	6.3
60°-70°	424.0	4.1
70°-80°	218.2	2.1
80°-90°	61.4	0.6
90°-100°	124.0	1.2
100°-110°	394.1	3.8
110°-120°	674.4	6.5
120°-130°	886.9	8.6
130°-140°	995.5	9.6
140°-150°	976.2	9.5
150°-160°	818.9	7.9
160°-170°	543.1	5.3
170°-180°	189.8	1.8
0°-30°	1632.3	15.8
0°-40°	2534.7	24.6
0°-60°	4015.5	38.9
0°-90°	4719.1	45.7
90°-120°	1192.5	11.6
90°-150°	4051.1	39.2
90°-180°	5603.0	54.3
0°-180°	10322.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2292	2292	2292	2292	2292	
5°	2292	2282	2254	2273	2267	217
15°	2180	2157	2086	2047	2026	614
25°	1979	1912	1775	1690	1659	910
35°	1705	1599	1417	1286	1240	1067
45°	1394	1255	1037	890	840	1076
55°	1060	898	674	550	510	947
65°	716	548	361	290	284	709
75°	382	236	166	151	149	404
85°	89	46	39	39	39	102
90°	2	22	59	56	57	10
95°	88	105	108	108	105	98
105°	364	369	372	375	375	384
115°	677	686	683	682	677	669
125°	984	999	995	989	987	880
135°	1273	1292	1296	1294	1289	984
145°	1546	1558	1567	1569	1563	966
155°	1767	1772	1778	1786	1781	813
165°	1923	1921	1921	1933	1924	542
175°	2001	1996	1992	2004	1994	190
180°	2004	2004	2004	2004	2004	

TEST NUMBER: P913304

CATALOG NUMBER: DFN2DIP-4P4F0-070D080US927-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2291.9	2291.9	2291.9	2291.9	2291.9
2.5°	2302.2	2291.9	2269.0	2289.9	2285.7
5°	2291.9	2281.5	2254.5	2273.2	2267.0
7.5°	2273.2	2260.8	2231.8	2239.9	2229.6
10°	2248.3	2233.8	2192.4	2186.0	2173.7
12.5°	2217.2	2198.5	2142.5	2130.1	2107.2
15°	2179.8	2157.0	2086.5	2047.2	2026.5
17.5°	2136.3	2103.1	2015.9	1970.3	1937.1
20°	2086.5	2044.9	1941.3	1889.6	1843.8
22.5°	2032.7	1984.9	1864.5	1794.1	1763.1
25°	1978.7	1912.2	1775.4	1690.4	1659.2
27.5°	1914.5	1843.8	1692.4	1595.0	1547.2
30°	1846.0	1767.0	1601.1	1495.5	1439.4
32.5°	1779.6	1684.1	1514.2	1389.6	1337.7
35°	1704.9	1599.1	1416.7	1286.0	1240.2
37.5°	1632.4	1518.1	1325.4	1182.1	1130.4
40°	1555.5	1431.2	1229.9	1082.7	1028.7
42.5°	1476.8	1344.1	1134.6	981.0	929.3
45°	1393.8	1254.7	1037.1	889.7	839.9
47.5°	1315.0	1167.8	943.8	796.4	750.8
50°	1227.9	1080.7	852.5	709.2	665.9
52.5°	1142.7	987.1	765.3	628.4	589.1
55°	1059.8	898.0	674.0	549.7	510.3
57.5°	974.9	808.9	593.3	477.1	443.9
60°	887.7	721.8	508.1	402.5	369.2
62.5°	802.7	636.8	435.5	336.0	319.5
65°	715.6	547.5	360.9	290.5	284.1
67.5°	632.6	464.5	290.5	255.0	248.9
70°	545.5	383.7	240.5	219.8	211.4
72.5°	462.6	309.0	201.1	184.7	180.5
75°	381.6	236.3	165.9	151.4	149.4
77.5°	300.8	167.9	130.7	122.3	118.2
80°	226.0	120.3	99.5	91.3	91.3
82.5°	157.6	81.0	68.4	64.2	64.2
85°	89.1	45.6	39.4	39.4	39.4
87.5°	33.2	16.5	16.5	14.5	14.5
90°	1.8	21.8	59.3	55.6	57.4
92.5°	37.5	50.8	52.6	54.3	54.3
95°	88.2	105.1	108.1	108.1	105.1
97.5°	146.9	162.6	169.2	169.2	169.2
100°	214.5	228.4	233.2	233.2	231.4
102.5°	285.8	296.1	302.7	304.5	302.7
105°	363.8	368.6	372.2	375.3	375.3
107.5°	441.1	448.4	448.4	449.6	441.1
110°	516.0	525.7	525.7	525.7	520.9

TEST NUMBER: P913304

CATALOG NUMBER: DFN2DIP-4P4F0-070D080US927-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	597.0	607.3	605.5	600.6	597.0
115°	676.8	686.4	683.4	681.6	676.8
117.5°	755.9	769.2	760.7	755.9	751.1
120°	835.7	849.0	835.7	835.7	830.2
122.5°	908.2	925.1	916.6	911.8	908.2
125°	984.3	999.4	994.6	989.1	987.4
127.5°	1058.7	1077.4	1070.7	1063.5	1058.7
130°	1128.1	1149.9	1146.8	1143.3	1136.6
132.5°	1206.1	1223.0	1224.2	1215.8	1210.9
135°	1273.1	1291.9	1295.5	1293.7	1288.9
137.5°	1348.1	1363.2	1366.2	1365.0	1357.7
140°	1414.0	1429.0	1437.5	1437.5	1430.8
142.5°	1481.6	1496.7	1501.6	1503.4	1496.7
145°	1545.7	1557.7	1567.4	1569.2	1562.6
147.5°	1603.1	1618.2	1625.4	1628.5	1621.8
150°	1662.3	1672.5	1679.2	1684.7	1679.2
152.5°	1714.8	1725.1	1733.6	1740.3	1733.6
155°	1767.4	1772.3	1777.7	1786.1	1780.7
157.5°	1812.7	1816.4	1819.4	1831.4	1823.0
160°	1853.2	1856.9	1858.7	1868.9	1861.7
162.5°	1890.7	1890.7	1892.5	1904.0	1895.5
165°	1922.7	1920.9	1920.9	1933.0	1924.5
167.5°	1951.7	1946.3	1946.3	1958.4	1949.9
170°	1973.5	1968.6	1966.8	1978.9	1968.6
172.5°	1988.6	1983.8	1982.0	1994.0	1983.8
175°	2000.7	1995.8	1992.2	2004.3	1994.0
177.5°	2007.3	2002.5	1998.8	2009.1	1998.8
180°	2004.3	2004.3	2004.3	2004.3	2004.3

TEST NUMBER: P913304

CATALOG NUMBER: DFN2DIP-4P4F0-070D080US927-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.13	8.93	9.13	9.93	11.26	4.09	4.89	5.09	5.89	7.23
	3H	9.81	10.52	10.82	11.54	12.89	5.28	5.99	6.29	7.00	8.36
	4H	10.42	11.09	11.44	12.11	13.47	5.73	6.40	6.75	7.42	8.78
	6H	10.84	11.46	11.88	12.49	13.86	6.05	6.67	7.08	7.69	9.06
	8H	10.97	11.56	12.01	12.60	13.97	6.14	6.73	7.18	7.77	9.14
	12H	11.04	11.60	12.08	12.63	14.02	6.18	6.74	7.22	7.77	9.17
4H	2H	8.14	8.82	9.17	9.83	11.20	4.68	5.36	5.71	6.38	7.74
	3H	9.98	10.54	11.01	11.58	12.96	6.03	6.59	7.07	7.64	9.02
	4H	10.67	11.18	11.71	12.22	13.62	6.58	7.09	7.63	8.13	9.53
	6H	11.19	11.63	12.24	12.69	14.08	7.00	7.44	8.05	8.50	9.90
	8H	11.37	11.78	12.42	12.83	14.24	7.13	7.54	8.18	8.59	10.00
	12H	11.46	11.83	12.54	12.90	14.32	7.19	7.57	8.27	8.63	10.05
8H	4H	10.64	11.05	11.69	12.10	13.51	6.86	7.27	7.92	8.33	9.74
	6H	11.21	11.55	12.28	12.64	14.05	7.38	7.72	8.46	8.82	10.22
	8H	11.43	11.72	12.51	12.80	14.23	7.57	7.87	8.66	8.95	10.38
	12H	11.57	11.83	12.66	12.91	14.37	7.69	7.96	8.78	9.03	10.50
12H	4H	10.59	10.96	11.66	12.03	13.44	6.87	7.24	7.94	8.31	9.72
	6H	11.18	11.48	12.27	12.56	13.99	7.43	7.73	8.52	8.81	10.24
	8H	11.41	11.67	12.49	12.74	14.21	7.64	7.91	8.73	8.98	10.45