

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P915945

Luminaire Tested: DFN2DIP-4P4F0-040D040US930-RLONL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P915945  
REPORT IS A COMBINATION OF REPORTS P900614 AND P897523  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-4P4F0-040D040US930-RLLONL  
Description: 4 foot, 90deg - 4way Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6000.6 lumens  
Efficiency: N/A  
Efficacy: 86.2 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular w/ Sides (W: 4.07' x L: 4.07' x H: 0.1')  
CIE Type: General Diffuse  
  
Input Watts (W): 69.6  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9968  
Total Harmonic Distortion (THDi): 0.064  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P915945  
CATALOG NUMBER: DFN2DIP-4P4F0-040D040US930-RLLONL

### Luminous Intensity Polar Plot

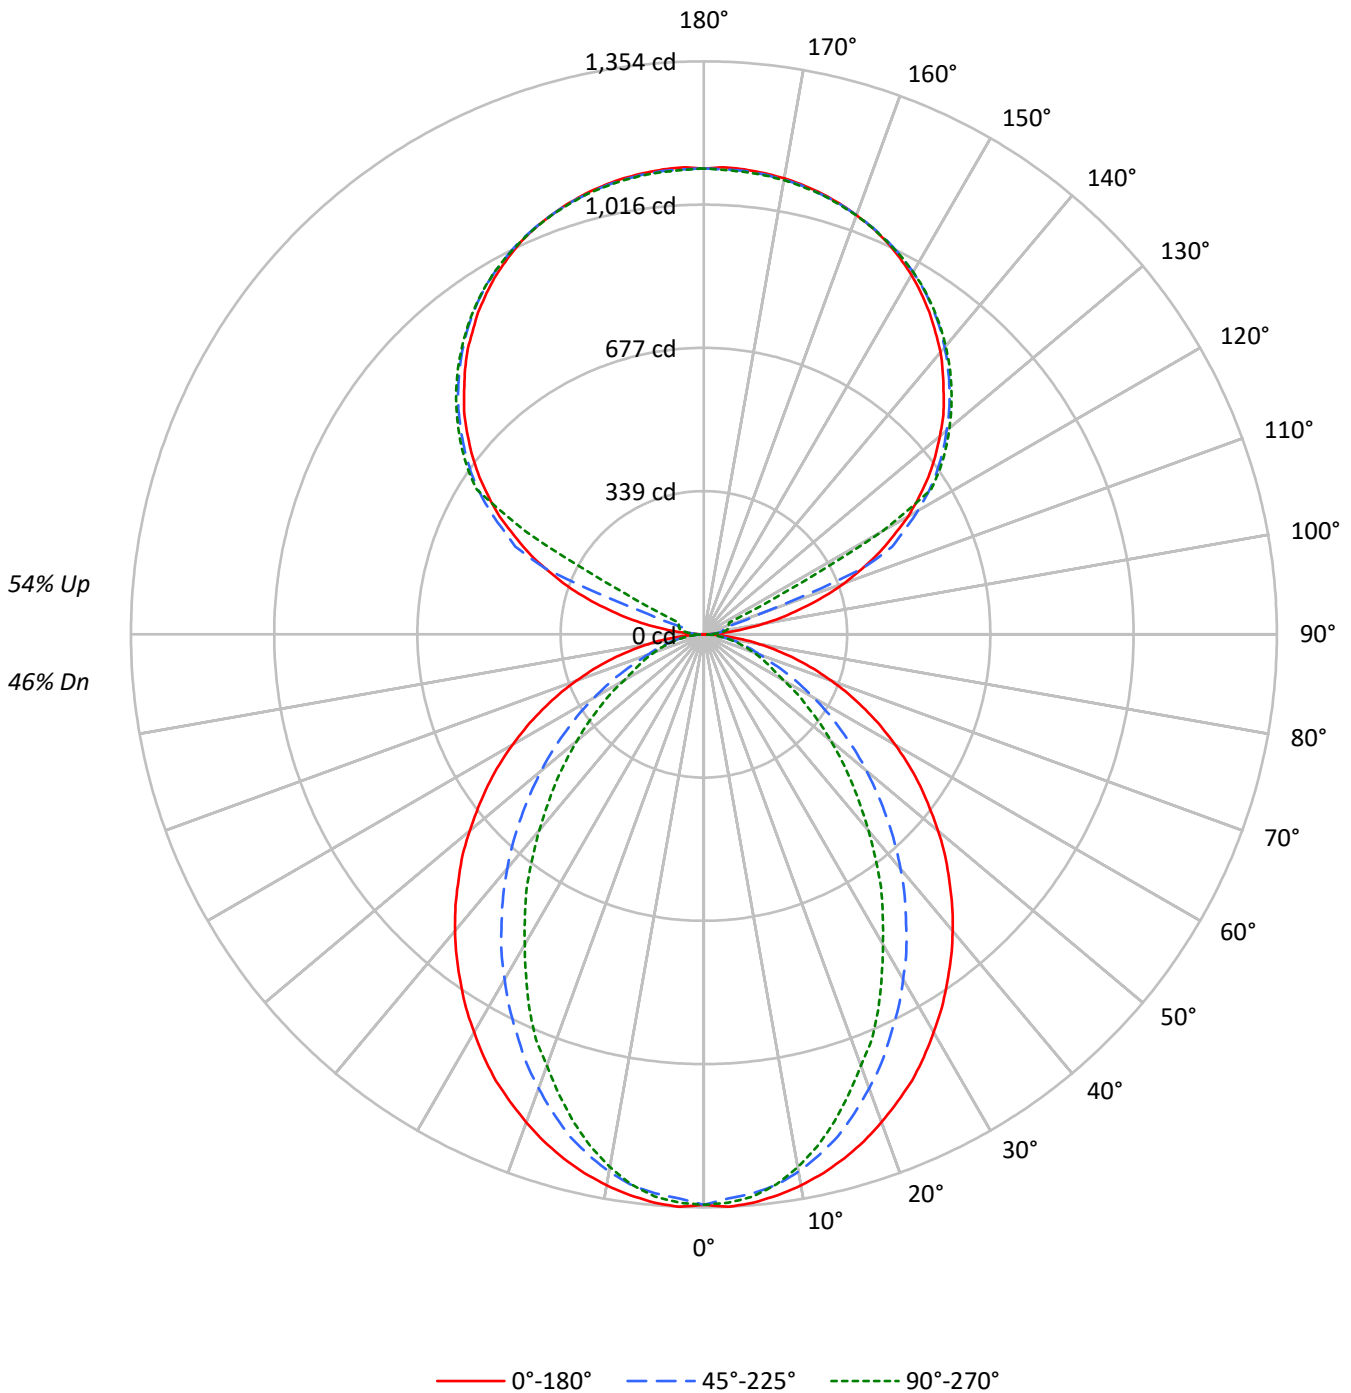



TEST NUMBER: P915945

CATALOG NUMBER: DFN2DIP-4P4F0-040D040US930-RLLONL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	106	106	106	106	98	98	98	98	81	81	81	66	66	66	53	53	53	46			46
1	97	93	90	86	89	86	83	80	72	70	68	59	58	56	47	46	45	40			40
2	89	82	76	71	82	76	70	66	63	60	57	52	50	48	42	40	39	34			34
3	81	72	65	60	75	67	61	56	56	52	48	47	43	41	38	35	34	29			29
4	75	64	57	51	68	60	53	48	50	45	41	42	38	35	34	31	29	26			26
5	69	58	50	44	63	53	46	41	45	40	36	38	34	31	31	28	26	23			23
6	63	52	44	38	58	48	41	36	41	36	32	34	30	27	28	25	23	20			20
7	59	47	39	34	54	44	37	32	37	32	28	31	27	24	26	23	21	18			18
8	55	43	35	30	50	40	33	28	34	29	25	29	25	22	24	21	19	16			16
9	51	39	32	27	47	36	30	25	31	26	22	27	23	20	22	19	17	15			15
10	48	36	29	24	44	33	27	23	29	24	20	25	21	18	20	18	15	13			13

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	874	874	874
5°	876	861	866
10°	867	844	839
15°	855	817	795
20°	840	778	742
25°	824	735	691
30°	802	691	625
35°	781	644	568
40°	759	595	502
45°	734	541	442
50°	708	486	384
55°	681	427	328
60°	650	366	270
65°	614	303	244
70°	570	245	221
75°	515	217	202
80°	436	183	176
85°	305	124	135

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 734 cd/sqm



TEST NUMBER: P915945

CATALOG NUMBER: DFN2DIP-4P4F0-040D040US930-RLONL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	126.3	2.1
10°-20°	346.8	5.8
20°-30°	486.9	8.1
30°-40°	530.7	8.8
40°-50°	487.8	8.1
50°-60°	383.1	6.4
60°-70°	249.3	4.2
70°-80°	128.4	2.1
80°-90°	34.7	0.6
90°-100°	36.3	0.6
100°-110°	135.3	2.3
110°-120°	358.8	6.0
120°-130°	595.1	9.9
130°-140°	632.1	10.5
140°-150°	587.5	9.8
150°-160°	472.3	7.9
160°-170°	304.4	5.1
170°-180°	104.8	1.7
0°-30°	960.0	16.0
0°-40°	1490.7	24.8
0°-60°	2361.5	39.4
0°-90°	2774.0	46.2
90°-120°	530.4	8.8
90°-150°	2345.2	39.1
90°-180°	3227.0	53.8
0°-180°	6000.6	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1348	1348	1348	1348	1348	
5°	1348	1342	1326	1337	1333	128
15°	1282	1268	1227	1204	1192	361
25°	1164	1125	1044	994	976	535
35°	1003	940	833	756	729	628
45°	820	738	610	523	494	633
55°	623	528	396	323	300	557
65°	421	322	212	171	167	417
75°	224	139	98	89	88	237
85°	52	27	23	23	23	60
90°	1	10	16	20	21	6
95°	52	25	31	35	34	61
105°	242	266	49	57	60	259
115°	458	471	491	123	65	451
125°	647	658	673	679	681	577
135°	801	814	821	829	828	619
145°	929	929	942	948	944	581
155°	1023	1016	1026	1030	1024	472
165°	1078	1074	1076	1082	1076	305
175°	1103	1097	1099	1105	1097	105
180°	1101	1101	1101	1101	1101	



TEST NUMBER: P915945

CATALOG NUMBER: DFN2DIP-4P4F0-040D040US930-RLLONL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1347.9	1347.9	1347.9	1347.9	1347.9
2.5°	1354.0	1347.9	1334.4	1346.7	1344.2
5°	1347.9	1341.7	1325.8	1336.8	1333.3
7.5°	1336.8	1329.6	1312.5	1317.3	1311.2
10°	1322.3	1313.7	1289.3	1285.6	1278.4
12.5°	1304.0	1293.0	1260.0	1252.7	1239.3
15°	1282.0	1268.5	1227.1	1204.0	1191.8
17.5°	1256.4	1236.8	1185.5	1158.8	1139.2
20°	1227.1	1202.6	1141.7	1111.3	1084.3
22.5°	1195.4	1167.3	1096.5	1055.1	1036.9
25°	1163.7	1124.6	1044.1	994.2	975.7
27.5°	1125.9	1084.3	995.3	938.0	909.9
30°	1085.7	1039.2	941.6	879.5	846.5
32.5°	1046.6	990.4	890.5	817.3	786.7
35°	1002.7	940.4	833.2	756.3	729.4
37.5°	960.0	892.8	779.4	695.2	664.8
40°	914.8	841.7	723.3	636.7	605.0
42.5°	868.5	790.4	667.2	576.9	546.5
45°	819.7	737.9	609.9	523.3	494.0
47.5°	773.4	686.8	555.1	468.4	441.6
50°	722.1	635.5	501.3	417.1	391.6
52.5°	672.1	580.6	450.1	369.6	346.4
55°	623.3	528.2	396.4	323.3	300.1
57.5°	573.3	475.7	348.9	280.5	261.1
60°	522.0	424.4	298.8	236.7	217.2
62.5°	472.1	374.5	256.1	197.6	187.9
65°	420.9	322.0	212.2	170.8	167.1
67.5°	372.1	273.2	170.8	150.0	146.3
70°	320.8	225.7	141.5	129.3	124.3
72.5°	272.1	181.7	118.3	108.6	106.2
75°	224.4	139.0	97.6	89.0	87.9
77.5°	176.9	98.7	76.9	72.0	69.5
80°	132.9	70.8	58.5	53.7	53.7
82.5°	92.7	47.6	40.3	37.7	37.7
85°	52.4	26.8	23.2	23.2	23.2
87.5°	19.6	9.7	9.7	8.6	8.6
90°	0.7	9.5	15.9	20.0	21.4
92.5°	20.0	16.7	19.1	20.7	21.4
95°	51.7	25.4	31.0	35.1	34.2
97.5°	93.2	27.9	40.6	43.0	43.8
100°	141.0	31.9	45.4	51.7	53.3
102.5°	193.5	192.0	47.0	55.7	58.1
105°	242.1	266.0	48.6	57.3	60.5
107.5°	298.6	318.5	50.2	58.9	62.1
110°	352.9	369.5	139.4	59.8	62.9



TEST NUMBER: P915945

CATALOG NUMBER: DFN2DIP-4P4F0-040D040US930-RLLONL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	403.8	418.1	404.6	61.3	63.8
115°	457.9	471.4	491.4	122.6	65.4
117.5°	504.9	520.8	534.4	420.4	211.8
120°	557.5	569.4	583.8	593.4	485.8
122.5°	602.0	614.8	630.8	635.5	636.3
125°	647.4	657.9	672.9	678.6	680.9
127.5°	688.8	700.0	712.0	720.0	720.7
130°	727.9	740.7	749.3	758.1	757.4
132.5°	767.7	778.1	786.8	794.0	793.3
135°	801.2	814.0	821.1	829.1	827.5
137.5°	836.2	845.7	853.8	861.7	859.3
140°	870.4	876.9	885.6	892.8	888.8
142.5°	899.2	904.7	915.1	921.4	917.5
145°	929.4	928.6	942.1	947.7	943.7
147.5°	955.6	953.2	966.8	970.8	967.7
150°	981.1	975.6	988.4	993.1	989.1
152.5°	1002.7	996.3	1008.2	1013.0	1007.5
155°	1023.4	1016.3	1025.8	1030.5	1024.2
157.5°	1040.1	1033.7	1041.0	1046.5	1040.1
160°	1054.4	1049.6	1054.4	1059.2	1053.6
162.5°	1067.1	1062.4	1066.4	1072.0	1064.8
165°	1078.3	1073.6	1075.9	1081.5	1075.9
167.5°	1087.1	1082.2	1084.8	1090.3	1083.1
170°	1094.3	1089.5	1091.0	1096.7	1089.5
172.5°	1099.0	1094.3	1095.9	1101.5	1094.3
175°	1102.9	1097.4	1099.0	1104.6	1096.7
177.5°	1104.6	1099.0	1099.8	1105.5	1098.3
180°	1100.7	1100.7	1100.7	1100.7	1100.7



TEST NUMBER: P915945  
 CATALOG NUMBER: DFN2DIP-4P4F0-040D040US930-RLONL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.34	7.14	7.33	8.14	9.47	2.30	3.10	3.29	4.10	5.43
	3H	8.02	8.73	9.02	9.74	11.09	3.48	4.20	4.49	5.21	6.56
	4H	8.63	9.31	9.65	10.32	11.68	3.93	4.61	4.95	5.63	6.98
	6H	9.05	9.68	10.08	10.70	12.06	4.26	4.88	5.28	5.90	7.27
	8H	9.18	9.77	10.22	10.81	12.17	4.35	4.94	5.38	5.97	7.34
	12H	9.25	9.81	10.28	10.84	12.22	4.39	4.95	5.43	5.98	7.37
4H	2H	6.35	7.03	7.38	8.04	9.40	2.89	3.57	3.92	4.58	5.94
	3H	8.18	8.75	9.22	9.79	11.16	4.24	4.80	5.27	5.85	7.22
	4H	8.88	9.39	9.92	10.43	11.82	4.79	5.30	5.83	6.34	7.73
	6H	9.40	9.84	10.45	10.90	12.29	5.21	5.65	6.26	6.71	8.10
	8H	9.58	9.99	10.63	11.04	12.44	5.34	5.75	6.39	6.80	8.20
	12H	9.67	10.05	10.74	11.11	12.52	5.40	5.78	6.47	6.84	8.25
8H	4H	8.85	9.26	9.90	10.31	11.71	5.07	5.48	6.12	6.53	7.94
	6H	9.42	9.76	10.49	10.85	12.25	5.59	5.93	6.67	7.02	8.42
	8H	9.64	9.94	10.72	11.01	12.43	5.78	6.08	6.86	7.16	8.58
	12H	9.78	10.04	10.86	11.11	12.57	5.90	6.17	6.99	7.24	8.70
12H	4H	8.80	9.17	9.86	10.23	11.64	5.08	5.45	6.14	6.51	7.92
	6H	9.39	9.69	10.47	10.77	12.19	5.64	5.94	6.72	7.02	8.44
	8H	9.62	9.88	10.70	10.95	12.41	5.85	6.12	6.94	7.19	8.65