

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P915968

Luminaire Tested: DFN2DIP-4P4F0-050D040US930-RLFL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P915968
REPORT IS A COMBINATION OF REPORTS P899096 AND P895967
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P4F0-050D040US930-RLLFLL
Description: 4 foot, 90deg - 4way Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6351.1 lumens
Efficiency: N/A
Efficacy: 78.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 4.07' x L: 4.07' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 80.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9951
Total Harmonic Distortion (THDi): 0.07
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P915968

CATALOG NUMBER: DFN2DIP-4P4F0-050D040US930-RLLFLL

Luminous Intensity Polar Plot

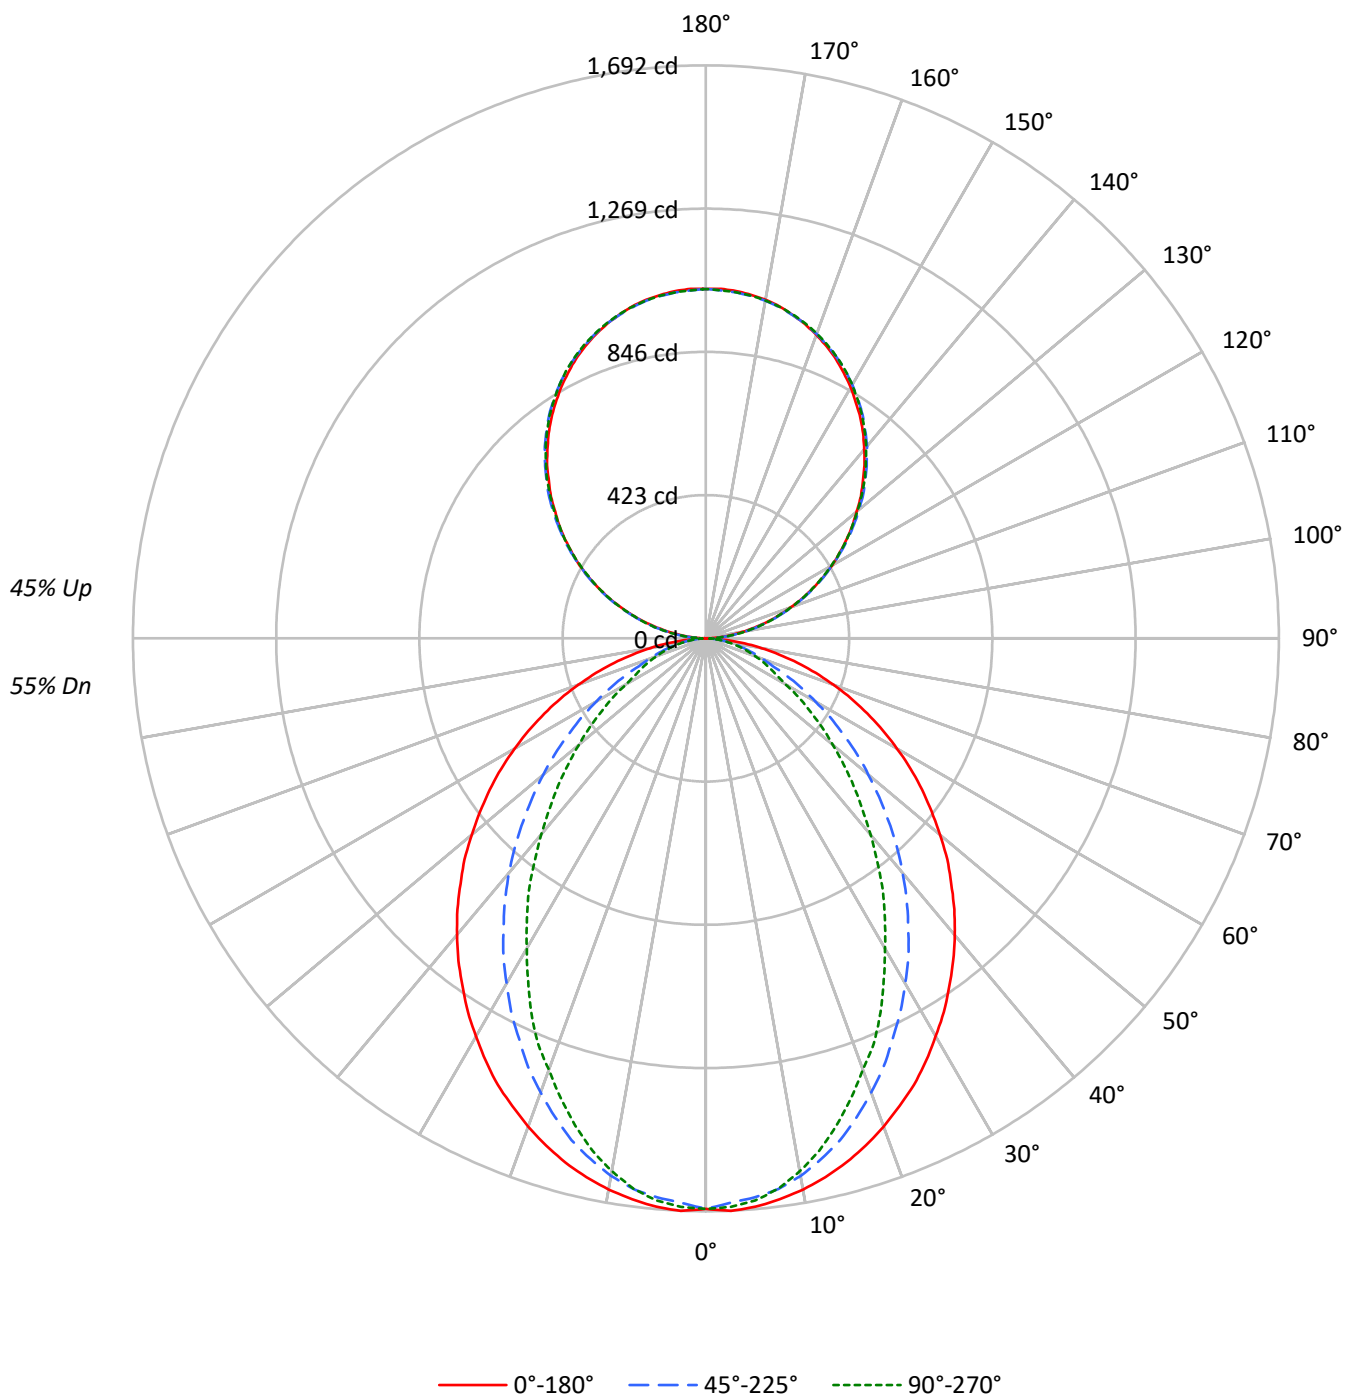

TEST NUMBER: P915968

CATALOG NUMBER: DFN2DIP-4P4F0-050D040US930-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	108	108	108	108	100	100	100	100	86	86	86	73	73	73	60	60	60
1	99	95	91	88	92	89	85	82	76	74	72	65	63	62	54	53	52
2	91	84	78	73	84	78	73	69	67	63	60	57	55	52	48	46	45
3	83	74	67	61	77	69	63	58	60	55	51	51	48	45	43	41	39
4	76	66	58	52	71	62	55	50	54	48	44	46	42	39	39	36	34
5	70	59	51	45	65	55	48	43	48	43	38	42	37	34	35	32	30
6	65	53	45	40	60	50	43	38	44	38	34	38	33	30	32	29	26
7	60	48	40	35	56	45	38	33	40	34	30	35	30	27	30	26	24
8	56	44	36	31	52	41	34	30	36	31	27	32	27	24	27	24	21
9	52	40	33	28	49	38	31	27	34	28	24	29	25	22	25	22	19
10	49	37	30	25	46	35	28	24	31	26	22	27	23	20	24	20	18

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1093	1093	1093
5°	1095	1076	1083
10°	1084	1055	1048
15°	1069	1021	994
20°	1050	973	927
25°	1029	919	863
30°	1002	864	782
35°	976	805	710
40°	949	744	628
45°	918	676	553
50°	885	607	480
55°	851	534	410
60°	812	457	338
65°	767	379	305
70°	713	306	276
75°	644	271	252
80°	545	228	220
85°	381	154	168

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 918 cd/sqm

TEST NUMBER: P915968

CATALOG NUMBER: DFN2DIP-4P4F0-050D040US930-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	157.9	2.5
10°-20°	433.5	6.8
20°-30°	608.6	9.6
30°-40°	663.4	10.4
40°-50°	609.7	9.6
50°-60°	478.8	7.5
60°-70°	311.7	4.9
70°-80°	160.4	2.5
80°-90°	43.9	0.7
90°-100°	63.8	1.0
100°-110°	202.8	3.2
110°-120°	347.0	5.5
120°-130°	456.4	7.2
130°-140°	512.3	8.1
140°-150°	502.4	7.9
150°-160°	421.4	6.6
160°-170°	279.5	4.4
170°-180°	97.7	1.5
0°-30°	1200.0	18.9
0°-40°	1863.4	29.3
0°-60°	2951.9	46.5
0°-90°	3467.9	54.6
90°-120°	613.6	9.7
90°-150°	2084.7	32.8
90°-180°	2883.0	45.4
0°-180°	6351.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1685	1685	1685	1685	1685	
5°	1685	1677	1657	1671	1667	160
15°	1602	1586	1534	1505	1490	452
25°	1455	1406	1305	1243	1220	669
35°	1253	1176	1042	945	912	784
45°	1025	922	762	654	617	791
55°	779	660	496	404	375	696
65°	526	402	265	214	209	521
75°	280	174	122	111	110	297
85°	66	34	29	29	29	75
90°	1	11	30	29	30	6
95°	45	54	56	56	54	51
105°	187	190	192	193	193	198
115°	348	353	352	351	348	344
125°	506	514	512	509	508	453
135°	655	665	667	666	663	506
145°	795	802	807	808	804	497
155°	910	912	915	919	916	419
165°	989	988	988	995	990	279
175°	1030	1027	1025	1031	1026	98
180°	1031	1031	1031	1031	1031	

TEST NUMBER: P915968

CATALOG NUMBER: DFN2DIP-4P4F0-050D040US930-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1684.8	1684.8	1684.8	1684.8	1684.8
2.5°	1692.4	1684.8	1668.0	1683.3	1680.2
5°	1684.8	1677.2	1657.3	1671.0	1666.6
7.5°	1671.0	1662.0	1640.6	1646.7	1639.0
10°	1652.8	1642.1	1611.7	1607.0	1597.9
12.5°	1629.9	1616.2	1575.0	1565.9	1549.1
15°	1602.5	1585.7	1533.9	1505.0	1489.7
17.5°	1570.4	1546.1	1482.0	1448.5	1424.0
20°	1533.9	1503.3	1427.1	1389.1	1355.4
22.5°	1494.3	1459.1	1370.7	1318.9	1296.1
25°	1454.6	1405.7	1305.1	1242.7	1219.7
27.5°	1407.4	1355.4	1244.1	1172.5	1137.4
30°	1357.1	1299.0	1177.0	1099.3	1058.1
32.5°	1308.2	1238.0	1113.1	1021.6	983.4
35°	1253.4	1175.6	1041.5	945.3	911.7
37.5°	1200.0	1116.1	974.4	869.0	831.0
40°	1143.5	1052.1	904.1	795.9	756.3
42.5°	1085.7	988.1	834.1	721.1	683.1
45°	1024.7	922.4	762.4	654.0	617.4
47.5°	966.7	858.5	693.8	585.5	552.0
50°	902.7	794.4	626.7	521.4	489.5
52.5°	840.1	725.7	562.6	462.0	433.1
55°	779.1	660.1	495.5	404.1	375.1
57.5°	716.6	594.7	436.1	350.7	326.3
60°	652.6	530.6	373.5	295.9	271.4
62.5°	590.1	468.1	320.2	247.0	234.9
65°	526.0	402.5	265.3	213.5	208.9
67.5°	465.0	341.5	213.5	187.5	183.0
70°	401.0	282.1	176.8	161.6	155.5
72.5°	340.1	227.1	147.9	135.7	132.6
75°	280.5	173.7	122.0	111.3	109.8
77.5°	221.1	123.4	96.1	89.9	86.8
80°	166.2	88.5	73.1	67.1	67.1
82.5°	115.9	59.5	50.3	47.2	47.2
85°	65.5	33.5	28.9	28.9	28.9
87.5°	24.5	12.1	12.1	10.7	10.7
90°	0.9	11.2	30.5	28.6	29.5
92.5°	19.2	26.1	27.1	28.0	28.0
95°	45.4	54.1	55.7	55.7	54.1
97.5°	75.6	83.6	87.1	87.1	87.1
100°	110.4	117.6	120.0	120.0	119.1
102.5°	147.1	152.4	155.8	156.7	155.8
105°	187.2	189.6	191.5	193.1	193.1
107.5°	227.0	230.7	230.7	231.3	227.0
110°	265.5	270.5	270.5	270.5	268.1



TEST NUMBER: P915968

CATALOG NUMBER: DFN2DIP-4P4F0-050D040US930-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	307.2	312.5	311.5	309.1	307.2
115°	348.2	353.3	351.6	350.7	348.2
117.5°	389.0	395.8	391.5	389.0	386.5
120°	430.1	436.8	430.1	430.1	427.2
122.5°	467.3	476.1	471.7	469.2	467.3
125°	506.5	514.3	511.8	509.0	508.1
127.5°	544.8	554.4	551.0	547.2	544.8
130°	580.5	591.7	590.2	588.3	584.9
132.5°	620.6	629.3	630.0	625.6	623.1
135°	655.2	664.8	666.7	665.7	663.2
137.5°	693.7	701.5	703.0	702.4	698.7
140°	727.6	735.4	739.7	739.7	736.3
142.5°	762.5	770.2	772.7	773.6	770.2
145°	795.4	801.6	806.6	807.6	804.1
147.5°	824.9	832.7	836.4	838.0	834.5
150°	855.4	860.7	864.1	866.9	864.1
152.5°	882.5	887.7	892.1	895.5	892.1
155°	909.5	912.0	914.8	919.2	916.3
157.5°	932.9	934.7	936.2	942.5	938.1
160°	953.7	955.5	956.4	961.7	958.0
162.5°	972.9	972.9	973.9	979.7	975.4
165°	989.4	988.5	988.5	994.7	990.3
167.5°	1004.4	1001.5	1001.5	1007.8	1003.4
170°	1015.5	1013.0	1012.1	1018.3	1013.0
172.5°	1023.3	1020.8	1019.9	1026.1	1020.8
175°	1029.6	1027.0	1025.2	1031.4	1026.1
177.5°	1033.0	1030.5	1028.6	1033.9	1028.6
180°	1031.4	1031.4	1031.4	1031.4	1031.4

TEST NUMBER: P915968

CATALOG NUMBER: DFN2DIP-4P4F0-050D040US930-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.89	8.76	8.82	9.70	10.91	3.85	4.72	4.78	5.66	6.87
	3H	9.58	10.36	10.52	11.30	12.53	5.05	5.83	5.98	6.77	8.00
	4H	10.19	10.93	11.14	11.88	13.12	5.50	6.24	6.45	7.19	8.43
	6H	10.62	11.30	11.58	12.26	13.51	5.82	6.50	6.79	7.46	8.71
	8H	10.75	11.40	11.72	12.37	13.62	5.92	6.56	6.89	7.53	8.78
	12H	10.82	11.43	11.79	12.40	13.67	5.96	6.57	6.94	7.54	8.82
4H	2H	7.92	8.65	8.87	9.60	10.84	4.46	5.19	5.41	6.14	7.38
	3H	9.76	10.37	10.72	11.35	12.60	5.81	6.42	6.78	7.40	8.66
	4H	10.45	11.01	11.43	11.99	13.26	6.36	6.92	7.34	7.90	9.17
	6H	10.98	11.46	11.96	12.45	13.73	6.79	7.27	7.77	8.26	9.54
	8H	11.16	11.60	12.14	12.59	13.89	6.92	7.36	7.91	8.36	9.65
	12H	11.26	11.66	12.26	12.67	13.96	6.99	7.39	7.99	8.40	9.69
8H	4H	10.42	10.87	11.41	11.86	13.15	6.65	7.10	7.64	8.09	9.38
	6H	11.00	11.37	12.01	12.40	13.69	7.17	7.54	8.19	8.58	9.86
	8H	11.22	11.54	12.24	12.57	13.87	7.37	7.69	8.39	8.71	10.02
	12H	11.36	11.65	12.39	12.66	14.02	7.49	7.77	8.51	8.79	10.14
12H	4H	10.38	10.78	11.39	11.79	13.09	6.66	7.06	7.66	8.07	9.37
	6H	10.97	11.30	12.00	12.32	13.63	7.22	7.55	8.24	8.57	9.88
	8H	11.20	11.49	12.22	12.50	13.86	7.44	7.72	8.46	8.74	10.09