

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P916028

Luminaire Tested: DFN2DIP-4P4F0-070D070US930-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P916028
REPORT IS A COMBINATION OF REPORTS P899136 AND P895967
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P4F0-070D070US930-RLLFLL
Description: 4 foot, 90deg - 4way Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 9901.8 lumens
Efficiency: N/A
Efficacy: 73.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 4.07' x L: 4.07' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 135.4
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P916028

CATALOG NUMBER: DFN2DIP-4P4F0-070D070US930-RLLFLL

Luminous Intensity Polar Plot

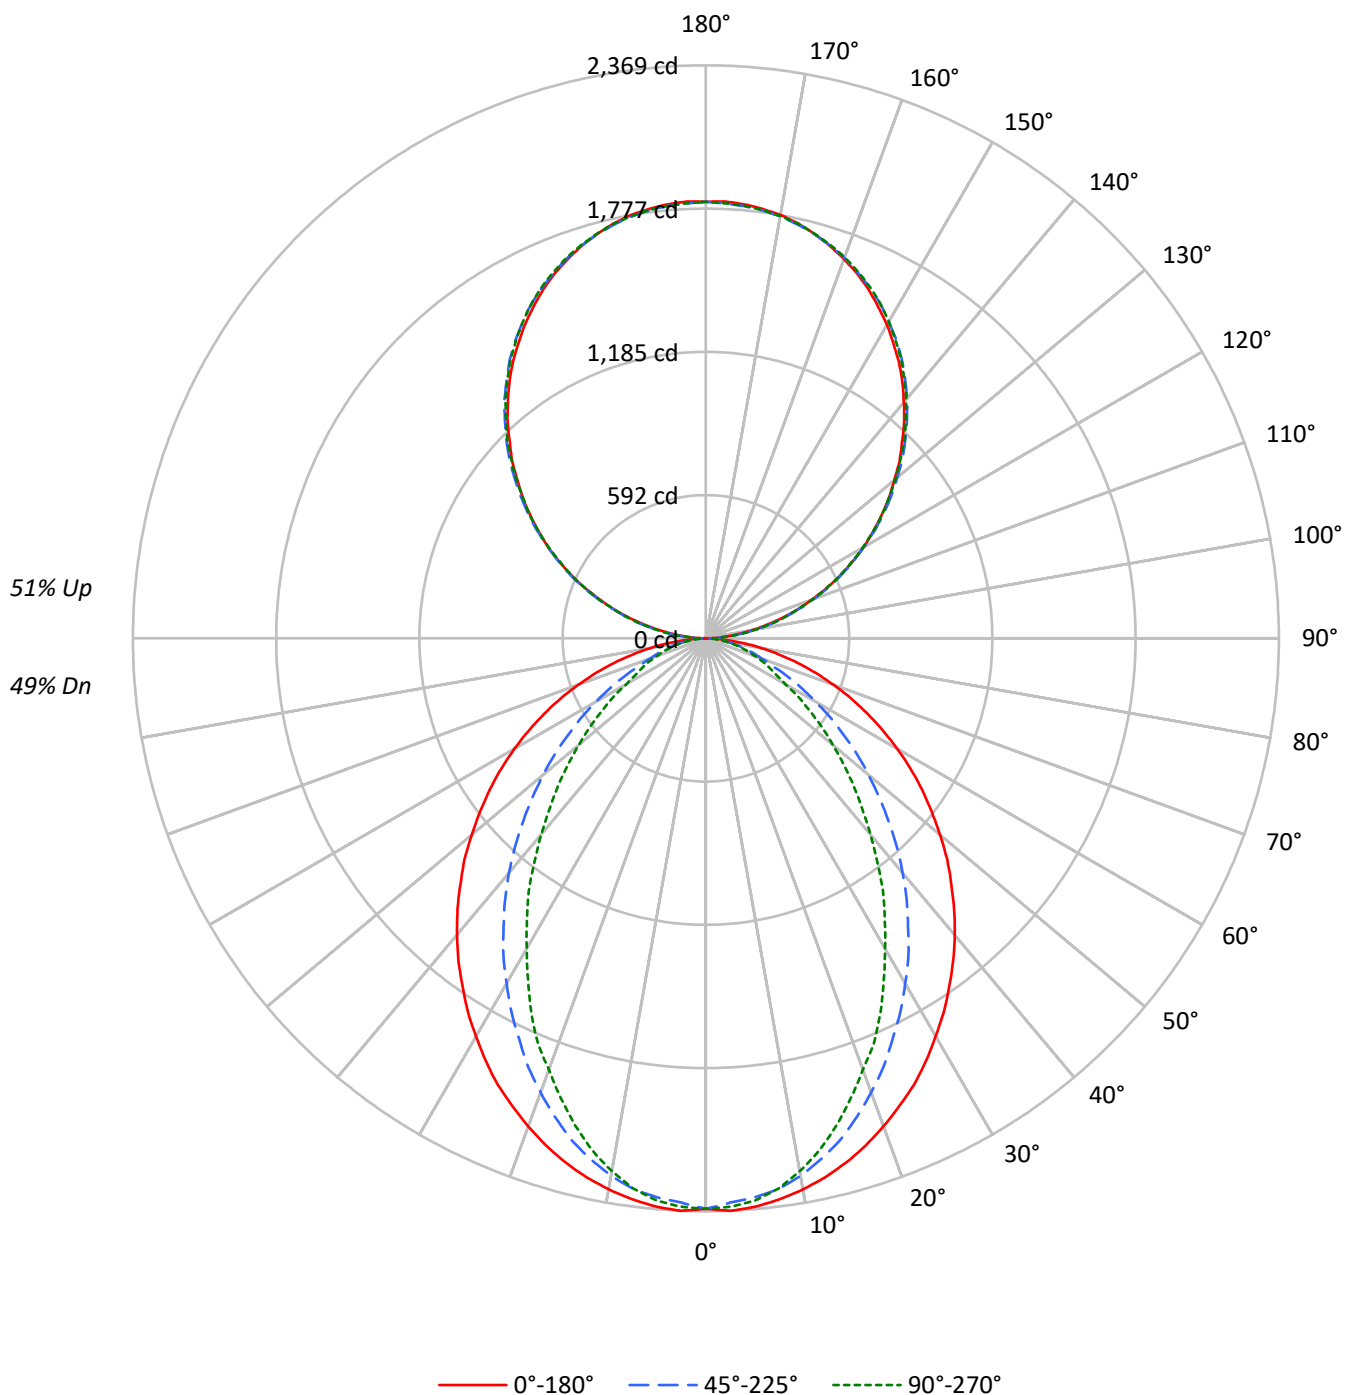

TEST NUMBER: P916028

CATALOG NUMBER: DFN2DIP-4P4F0-070D070US930-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	107	107	107	107	99	99	99	99	83	83	83	68	68	68	55	55	55
1	98	94	90	87	90	87	84	81	73	71	69	61	59	58	50	49	48
2	90	83	77	72	82	76	71	67	65	61	58	54	51	49	44	42	41
3	82	73	66	60	75	68	61	57	58	53	49	48	45	42	40	37	35
4	75	65	57	51	69	60	54	48	51	46	42	43	40	36	36	33	31
5	69	58	50	44	64	54	47	42	46	41	37	39	35	32	32	29	27
6	64	52	44	39	59	49	42	37	42	36	32	35	31	28	30	26	24
7	59	47	40	34	55	44	37	32	38	33	29	32	28	25	27	24	22
8	55	43	36	30	51	40	33	29	35	29	26	30	26	23	25	22	20
9	51	39	32	27	47	37	30	26	32	27	23	27	23	20	23	20	18
10	48	36	29	24	44	34	28	23	30	24	21	25	21	19	22	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1530	1530	1530
5°	1533	1506	1516
10°	1518	1477	1467
15°	1497	1429	1392
20°	1469	1362	1298
25°	1441	1287	1208
30°	1403	1210	1094
35°	1366	1127	994
40°	1328	1042	878
45°	1285	946	774
50°	1239	850	672
55°	1192	748	574
60°	1137	640	473
65°	1074	531	426
70°	998	429	387
75°	902	379	353
80°	763	320	308
85°	533	216	235

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1366 cd/sqm

TEST NUMBER: P916028

CATALOG NUMBER: DFN2DIP-4P4F0-070D070US930-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	221.1	2.2
10°-20°	606.9	6.1
20°-30°	852.0	8.6
30°-40°	928.8	9.4
40°-50°	853.6	8.6
50°-60°	670.4	6.8
60°-70°	436.4	4.4
70°-80°	224.6	2.3
80°-90°	62.5	0.6
90°-100°	111.7	1.1
100°-110°	354.9	3.6
110°-120°	607.3	6.1
120°-130°	798.7	8.1
130°-140°	896.5	9.1
140°-150°	879.1	8.9
150°-160°	737.5	7.4
160°-170°	489.1	4.9
170°-180°	170.9	1.7
0°-30°	1679.9	17.0
0°-40°	2608.7	26.3
0°-60°	4132.7	41.7
0°-90°	4856.1	49.0
90°-120°	1073.9	10.8
90°-150°	3648.2	36.8
90°-180°	5046.0	51.0
0°-180°	9901.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2359	2359	2359	2359	2359	
5°	2359	2348	2320	2340	2333	224
15°	2244	2220	2147	2107	2086	632
25°	2036	1968	1827	1740	1708	937
35°	1755	1646	1458	1324	1276	1098
45°	1434	1291	1067	916	864	1108
55°	1091	924	694	566	525	975
65°	736	564	371	299	292	730
75°	393	243	171	156	154	415
85°	92	47	40	40	40	105
90°	2	20	53	50	52	10
95°	79	95	97	97	95	88
105°	328	332	335	338	338	346
115°	609	618	616	614	609	603
125°	886	900	896	891	889	792
135°	1147	1163	1167	1165	1161	886
145°	1392	1403	1412	1413	1407	870
155°	1592	1596	1601	1608	1604	733
165°	1731	1730	1730	1741	1733	488
175°	1802	1797	1794	1805	1796	171
180°	1805	1805	1805	1805	1805	

TEST NUMBER: P916028

CATALOG NUMBER: DFN2DIP-4P4F0-070D070US930-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2358.7	2358.7	2358.7	2358.7	2358.7
2.5°	2369.3	2358.7	2335.2	2356.7	2352.4
5°	2358.7	2348.1	2320.3	2339.5	2333.1
7.5°	2339.5	2326.8	2296.9	2305.3	2294.7
10°	2313.9	2299.0	2256.3	2249.8	2237.1
12.5°	2281.9	2262.7	2205.0	2192.3	2168.7
15°	2243.5	2219.9	2147.4	2106.9	2085.6
17.5°	2198.6	2164.5	2074.8	2027.8	1993.6
20°	2147.4	2104.6	1998.0	1944.7	1897.6
22.5°	2092.0	2042.8	1918.9	1846.4	1814.5
25°	2036.5	1968.0	1827.2	1739.8	1707.6
27.5°	1970.3	1897.6	1741.8	1641.5	1592.4
30°	1899.9	1818.6	1647.8	1539.1	1481.4
32.5°	1831.5	1733.2	1558.4	1430.2	1376.7
35°	1754.7	1645.8	1458.1	1323.6	1276.4
37.5°	1680.0	1562.4	1364.1	1216.6	1163.4
40°	1600.9	1473.0	1265.8	1114.3	1058.7
42.5°	1519.9	1383.3	1167.7	1009.6	956.4
45°	1434.5	1291.4	1067.4	915.7	864.5
47.5°	1353.4	1201.9	971.3	819.6	772.7
50°	1263.7	1112.2	877.3	729.9	685.3
52.5°	1176.1	1015.9	787.7	646.8	606.3
55°	1090.7	924.2	693.7	565.7	525.2
57.5°	1003.3	832.5	610.6	491.0	456.8
60°	913.6	742.8	522.9	414.3	380.0
62.5°	826.1	655.4	448.2	345.8	328.8
65°	736.5	563.5	371.4	299.0	292.4
67.5°	651.1	478.1	299.0	262.4	256.2
70°	561.4	394.9	247.5	226.2	217.6
72.5°	476.1	318.0	207.0	190.0	185.7
75°	392.7	243.2	170.7	155.8	153.8
77.5°	309.6	172.8	134.5	125.9	121.6
80°	232.6	123.8	102.4	94.0	94.0
82.5°	162.2	83.3	70.4	66.1	66.1
85°	91.7	46.9	40.5	40.5	40.5
87.5°	34.2	17.0	17.0	14.9	14.9
90°	1.6	19.6	53.3	50.1	51.7
92.5°	33.8	45.7	47.4	49.0	49.0
95°	79.4	94.7	97.4	97.4	94.7
97.5°	132.2	146.3	152.4	152.4	152.4
100°	193.1	205.7	210.0	210.0	208.4
102.5°	257.4	266.6	272.6	274.3	272.6
105°	327.6	331.9	335.2	337.9	337.9
107.5°	397.2	403.7	403.7	404.9	397.2
110°	464.7	473.4	473.4	473.4	469.0



TEST NUMBER: P916028

CATALOG NUMBER: DFN2DIP-4P4F0-070D070US930-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	537.6	546.9	545.3	540.9	537.6
115°	609.4	618.2	615.5	613.8	609.4
117.5°	680.7	692.7	685.1	680.7	676.4
120°	752.5	764.5	752.5	752.5	747.6
122.5°	817.8	833.1	825.5	821.1	817.8
125°	886.4	900.0	895.7	890.8	889.2
127.5°	953.3	970.2	964.3	957.7	953.3
130°	1015.9	1035.5	1032.8	1029.6	1023.5
132.5°	1086.1	1101.4	1102.4	1094.9	1090.5
135°	1146.6	1163.3	1166.7	1165.0	1160.7
137.5°	1214.0	1227.6	1230.3	1229.2	1222.7
140°	1273.3	1286.9	1294.5	1294.5	1288.6
142.5°	1334.2	1347.9	1352.2	1353.8	1347.9
145°	1392.0	1402.8	1411.5	1413.2	1407.2
147.5°	1443.6	1457.3	1463.8	1466.5	1460.5
150°	1497.0	1506.2	1512.2	1517.1	1512.2
152.5°	1544.3	1553.6	1561.1	1567.2	1561.1
155°	1591.6	1595.9	1600.9	1608.5	1603.6
157.5°	1632.5	1635.7	1638.4	1649.3	1641.7
160°	1668.9	1672.2	1673.8	1683.0	1676.5
162.5°	1702.7	1702.7	1704.3	1714.6	1707.0
165°	1731.4	1729.8	1729.8	1740.7	1733.1
167.5°	1757.6	1752.7	1752.7	1763.6	1756.0
170°	1777.2	1772.9	1771.2	1782.1	1772.9
172.5°	1790.8	1786.4	1784.8	1795.7	1786.4
175°	1801.6	1797.3	1794.1	1804.9	1795.7
177.5°	1807.7	1803.3	1800.0	1809.3	1800.0
180°	1804.9	1804.9	1804.9	1804.9	1804.9

TEST NUMBER: P916028

CATALOG NUMBER: DFN2DIP-4P4F0-070D070US930-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.55	9.37	9.52	10.36	11.64	4.51	5.34	5.48	6.32	7.60
	3H	10.23	10.97	11.22	11.96	13.27	5.70	6.44	6.69	7.43	8.74
	4H	10.85	11.54	11.84	12.54	13.85	6.15	6.85	7.15	7.84	9.16
	6H	11.27	11.91	12.28	12.91	14.24	6.48	7.12	7.48	8.11	9.44
	8H	11.40	12.01	12.41	13.03	14.35	6.57	7.18	7.58	8.19	9.52
	12H	11.47	12.04	12.48	13.05	14.40	6.61	7.19	7.63	8.20	9.55
4H	2H	8.57	9.26	9.57	10.26	11.58	5.11	5.81	6.11	6.80	8.12
	3H	10.40	10.98	11.42	12.01	13.34	6.46	7.04	7.47	8.06	9.39
	4H	11.10	11.63	12.12	12.64	14.00	7.01	7.54	8.03	8.55	9.91
	6H	11.62	12.07	12.65	13.11	14.47	7.43	7.89	8.46	8.92	10.28
	8H	11.80	12.22	12.83	13.25	14.62	7.56	7.99	8.59	9.02	10.38
	12H	11.90	12.28	12.95	13.33	14.70	7.63	8.01	8.68	9.06	10.43
8H	4H	11.07	11.49	12.10	12.52	13.89	7.29	7.72	8.32	8.75	10.12
	6H	11.64	11.99	12.69	13.06	14.43	7.81	8.16	8.87	9.24	10.60
	8H	11.86	12.17	12.92	13.23	14.61	8.01	8.31	9.07	9.37	10.76
	12H	12.00	12.27	13.07	13.33	14.75	8.13	8.40	9.19	9.45	10.88
12H	4H	11.02	11.40	12.07	12.45	13.82	7.30	7.68	8.35	8.73	10.10
	6H	11.62	11.92	12.68	12.98	14.36	7.87	8.17	8.93	9.23	10.61
	8H	11.84	12.11	12.90	13.16	14.59	8.08	8.35	9.14	9.40	10.83