

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P918650

Luminaire Tested: DFN2DIP-4P4F0-030D050US935-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P918650
REPORT IS A COMBINATION OF REPORTS P899103 AND P895967
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P4F0-030D050US935-FLLFLL
Description: 4 foot, 90deg - 4way Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6367.1 lumens
Efficiency: N/A
Efficacy: 93.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 4.07' x L: 4.07' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 67.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.983
Total Harmonic Distortion (THDi): 0.073
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P918650

CATALOG NUMBER: DFN2DIP-4P4F0-030D050US935-FLLFLL

Luminous Intensity Polar Plot

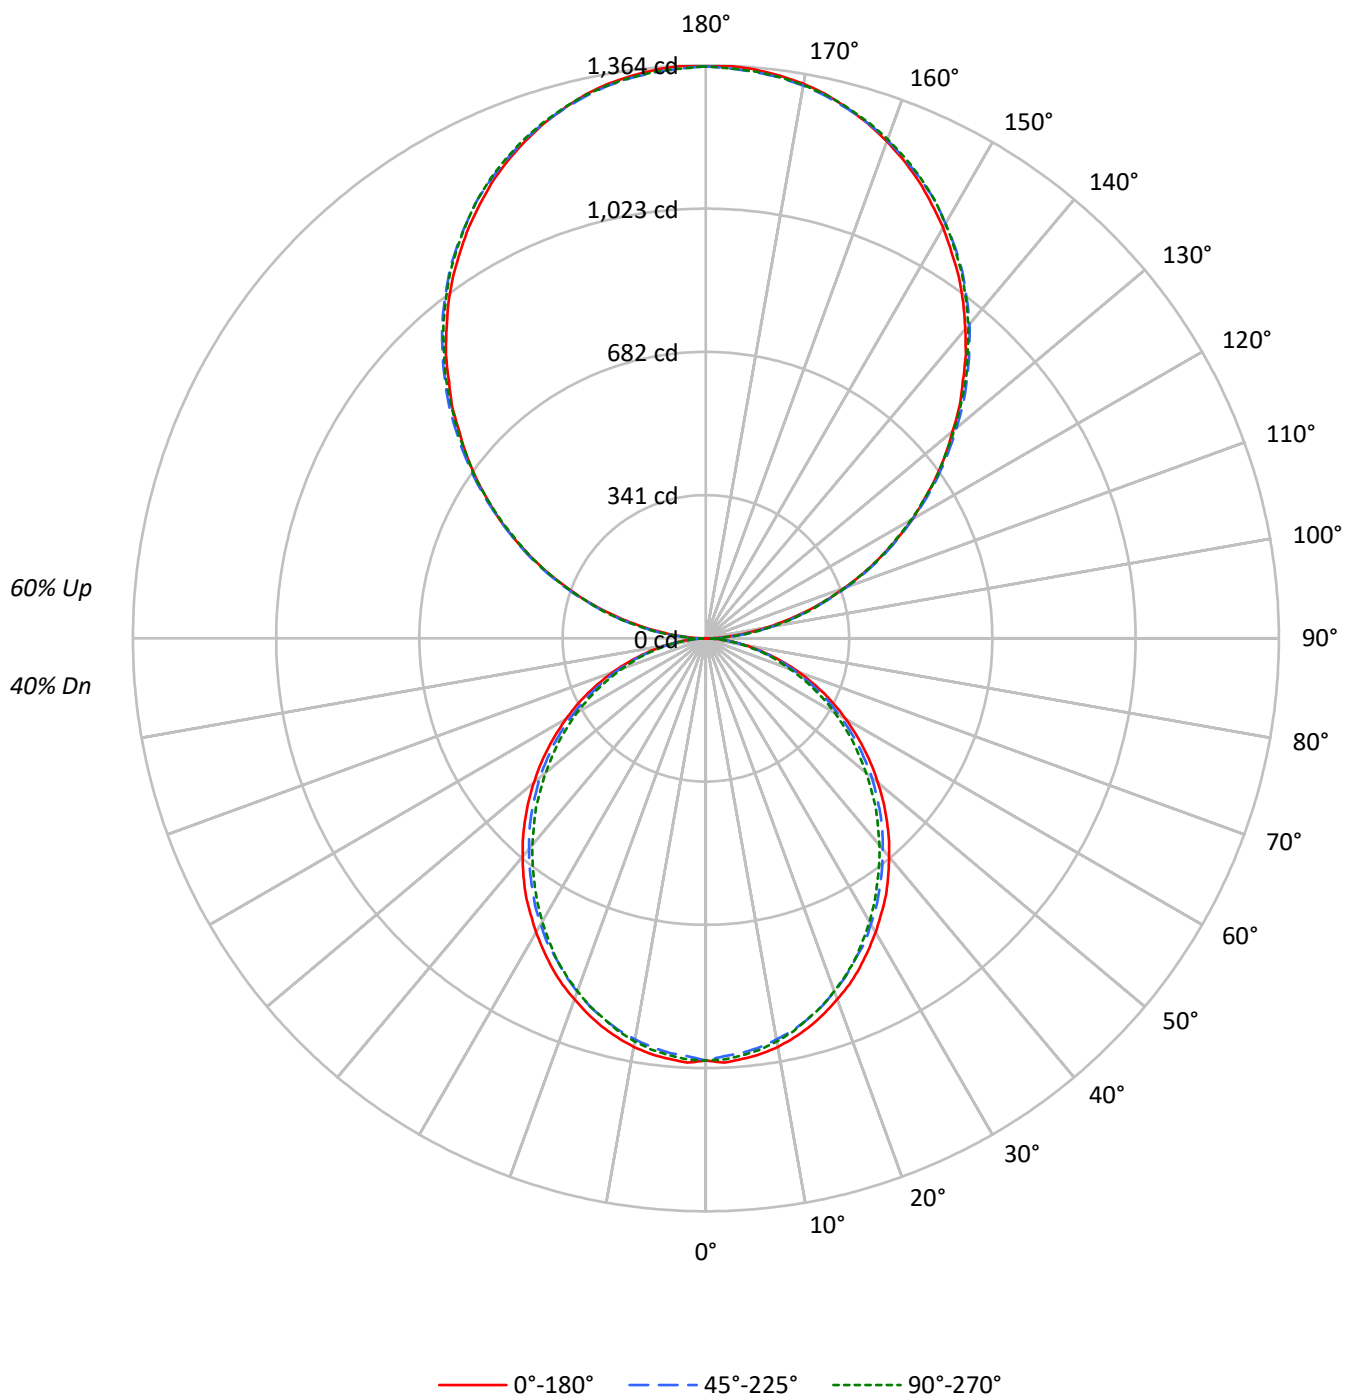

TEST NUMBER: P918650

CATALOG NUMBER: DFN2DIP-4P4F0-030D050US935-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	95	95	95	95	78	78	78	62	62	62	47	47	47
1	96	91	87	84	87	83	80	77	68	66	64	54	53	51	42	41	40
2	87	80	74	69	79	73	68	63	60	56	53	48	45	43	37	35	33
3	79	70	63	57	72	64	58	53	53	48	44	42	39	36	32	30	28
4	73	62	54	48	66	57	50	45	47	42	38	38	34	31	29	27	25
5	67	55	47	41	60	51	44	38	42	37	33	34	30	27	26	23	21
6	61	49	41	36	56	45	38	33	38	32	28	30	27	24	24	21	19
7	57	45	37	31	51	41	34	29	34	29	25	28	24	21	22	19	17
8	52	40	33	28	48	37	30	26	31	26	22	25	21	18	20	17	15
9	49	37	29	24	44	34	27	23	28	23	20	23	19	17	18	16	14
10	46	34	27	22	41	31	25	20	26	21	18	21	18	15	17	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	652	652	652
5°	653	643	647
10°	648	635	639
15°	638	624	626
20°	626	610	612
25°	613	593	596
30°	597	577	575
35°	582	558	554
40°	563	539	533
45°	544	520	512
50°	524	500	488
55°	503	477	466
60°	479	450	440
65°	453	421	410
70°	419	387	378
75°	373	345	349
80°	317	292	292
85°	230	201	196

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1031 cd/sqm

TEST NUMBER: P918650

CATALOG NUMBER: DFN2DIP-4P4F0-030D050US935-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	94.6	1.5
10°-20°	266.2	4.2
20°-30°	391.1	6.1
30°-40°	454.3	7.1
40°-50°	453.7	7.1
50°-60°	395.6	6.2
60°-70°	292.5	4.6
70°-80°	165.5	2.6
80°-90°	47.5	0.7
90°-100°	84.2	1.3
100°-110°	267.7	4.2
110°-120°	458.1	7.2
120°-130°	602.5	9.5
130°-140°	676.3	10.6
140°-150°	663.1	10.4
150°-160°	556.3	8.7
160°-170°	368.9	5.8
170°-180°	128.9	2.0
0°-30°	751.9	11.8
0°-40°	1206.2	18.9
0°-60°	2055.6	32.3
0°-90°	2561.0	40.2
90°-120°	810.0	12.7
90°-150°	2751.9	43.2
90°-180°	3806.0	59.8
0°-180°	6367.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1005	1005	1005	1005	1005	
5°	1005	1001	991	998	996	95
15°	957	951	938	942	938	269
25°	866	858	842	844	842	398
35°	747	737	722	716	711	467
45°	608	601	587	576	572	469
55°	460	454	443	431	426	411
65°	310	304	295	286	281	307
75°	162	160	156	150	152	173
85°	40	39	38	35	34	44
90°	1	15	40	38	39	6
95°	60	72	73	73	72	67
105°	247	250	253	255	255	261
115°	460	466	464	463	460	455
125°	669	679	676	672	671	598
135°	865	878	880	879	876	669
145°	1050	1058	1065	1066	1061	656
155°	1201	1204	1208	1213	1210	553
165°	1306	1305	1305	1313	1307	368
175°	1359	1356	1353	1362	1354	129
180°	1362	1362	1362	1362	1362	

TEST NUMBER: P918650

CATALOG NUMBER: DFN2DIP-4P4F0-030D050US935-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1005.0	1005.0	1005.0	1005.0	1005.0
2.5°	1010.9	1006.1	995.4	1005.0	1003.2
5°	1005.0	1001.3	990.6	998.3	996.4
7.5°	998.3	992.6	981.9	989.7	987.7
10°	987.7	980.9	969.4	977.1	974.2
12.5°	973.2	967.4	955.9	960.6	958.7
15°	956.7	951.1	938.4	942.3	937.5
17.5°	936.4	930.7	918.1	922.9	918.1
20°	914.2	908.4	894.9	897.8	894.0
22.5°	892.1	883.4	870.7	870.7	868.7
25°	865.9	858.2	841.8	843.7	841.8
27.5°	836.9	830.1	817.6	814.8	809.9
30°	808.0	800.2	785.7	782.8	778.9
32.5°	777.1	771.3	755.8	749.9	746.1
35°	747.1	737.4	721.9	716.1	711.3
37.5°	713.3	704.6	689.1	682.3	677.4
40°	678.5	670.7	655.2	646.6	642.7
42.5°	644.6	636.9	621.5	611.7	606.0
45°	608.0	601.1	586.6	576.0	572.1
47.5°	572.1	565.4	549.9	539.2	533.5
50°	534.4	529.6	516.1	502.6	497.7
52.5°	497.7	490.9	478.5	467.8	461.0
55°	460.1	454.3	442.6	431.1	426.3
57.5°	422.3	417.5	404.9	393.3	389.4
60°	384.6	380.8	367.3	356.6	353.8
62.5°	347.9	341.1	331.5	321.8	318.0
65°	310.3	304.4	294.8	286.1	281.3
67.5°	271.6	266.7	258.0	251.3	247.5
70°	235.8	232.0	223.3	216.5	212.7
72.5°	199.1	195.2	190.4	183.7	180.8
75°	162.3	160.5	155.6	149.8	151.8
77.5°	129.5	125.6	123.6	120.8	118.0
80°	96.7	95.7	93.7	90.8	88.9
82.5°	65.7	65.7	64.8	60.9	60.9
85°	39.6	38.7	37.7	34.8	33.8
87.5°	17.4	15.5	13.5	10.7	9.6
90°	1.2	14.8	40.2	37.8	39.0
92.5°	25.5	34.4	35.7	36.9	36.9
95°	59.9	71.5	73.4	73.4	71.5
97.5°	99.7	110.4	114.9	114.9	114.9
100°	145.7	155.2	158.4	158.4	157.2
102.5°	194.2	201.1	205.6	206.9	205.6
105°	247.1	250.4	252.9	254.9	254.9
107.5°	299.6	304.5	304.5	305.4	299.6
110°	350.5	357.1	357.1	357.1	353.8

TEST NUMBER: P918650

CATALOG NUMBER: DFN2DIP-4P4F0-030D050US935-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	405.5	412.5	411.3	408.0	405.5
115°	459.7	466.3	464.3	463.0	459.7
117.5°	513.5	522.5	516.8	513.5	510.2
120°	567.7	576.7	567.7	567.7	564.0
122.5°	616.9	628.4	622.7	619.4	616.9
125°	668.7	678.9	675.6	671.9	670.7
127.5°	719.1	731.8	727.4	722.4	719.1
130°	766.4	781.1	779.0	776.6	772.1
132.5°	819.3	830.8	831.6	825.9	822.6
135°	864.9	877.5	880.0	878.8	875.5
137.5°	915.8	926.0	928.1	927.2	922.3
140°	960.4	970.8	976.5	976.5	972.0
142.5°	1006.4	1016.8	1020.0	1021.2	1016.8
145°	1050.0	1058.2	1064.7	1066.0	1061.4
147.5°	1089.0	1099.2	1104.1	1106.2	1101.6
150°	1129.2	1136.2	1140.6	1144.4	1140.6
152.5°	1164.9	1171.9	1177.6	1182.2	1177.6
155°	1200.6	1203.8	1207.5	1213.3	1209.6
157.5°	1231.4	1233.8	1235.9	1244.1	1238.4
160°	1258.9	1261.4	1262.6	1269.5	1264.6
162.5°	1284.4	1284.4	1285.6	1293.4	1287.6
165°	1306.1	1304.8	1304.8	1313.1	1307.3
167.5°	1325.8	1322.1	1322.1	1330.3	1324.6
170°	1340.6	1337.3	1336.1	1344.3	1337.3
172.5°	1350.8	1347.5	1346.3	1354.5	1347.5
175°	1359.1	1355.7	1353.3	1361.5	1354.5
177.5°	1363.6	1360.3	1357.8	1364.8	1357.8
180°	1361.5	1361.5	1361.5	1361.5	1361.5

TEST NUMBER: P918650

CATALOG NUMBER: DFN2DIP-4P4F0-030D050US935-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	4.83	5.61	5.86	6.65	8.05	4.38	5.16	5.42	6.20	7.61
	3H	6.49	7.18	7.53	8.24	9.66	6.00	6.69	7.04	7.75	9.17
	4H	7.07	7.74	8.13	8.79	10.22	6.58	7.24	7.64	8.30	9.73
	6H	7.47	8.08	8.54	9.14	10.58	6.97	7.58	8.04	8.64	10.08
	8H	7.58	8.16	8.65	9.23	10.67	7.08	7.66	8.15	8.73	10.17
	12H	7.63	8.18	8.70	9.25	10.71	7.12	7.67	8.19	8.74	10.20
4H	2H	5.28	5.94	6.34	6.99	8.42	4.92	5.59	5.99	6.64	8.07
	3H	7.14	7.70	8.22	8.78	10.22	6.74	7.29	7.81	8.37	9.81
	4H	7.86	8.37	8.94	9.44	10.90	7.43	7.94	8.51	9.01	10.48
	6H	8.37	8.81	9.46	9.91	11.36	7.94	8.38	9.03	9.47	10.93
	8H	8.52	8.93	9.61	10.02	11.49	8.09	8.49	9.18	9.58	11.06
	12H	8.60	8.96	9.70	10.07	11.55	8.15	8.52	9.25	9.62	11.10
8H	4H	8.05	8.46	9.14	9.54	11.02	7.67	8.08	8.76	9.17	10.64
	6H	8.68	9.02	9.79	10.15	11.62	8.30	8.64	9.41	9.77	11.24
	8H	8.91	9.20	10.02	10.31	11.80	8.51	8.81	9.63	9.92	11.41
	12H	9.04	9.30	10.16	10.41	11.94	8.63	8.89	9.75	9.99	11.52
12H	4H	8.03	8.40	9.14	9.50	10.98	7.66	8.03	8.77	9.13	10.61
	6H	8.71	9.01	9.83	10.12	11.61	8.34	8.64	9.46	9.75	11.24
	8H	8.96	9.21	10.08	10.32	11.85	8.58	8.83	9.70	9.94	11.47