

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P921386

Luminaire Tested: DFN2DIP-4P4F0-030D070US940-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P921386
REPORT IS A COMBINATION OF REPORTS P899127 AND P895967
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P4F0-030D070US940-FLLFLL
Description: 4 foot, 90deg - 4way Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8172.6 lumens
Efficiency: N/A
Efficacy: 92.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 4.07' x L: 4.07' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 88.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.983
Total Harmonic Distortion (THDi): 0.073
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P921386

CATALOG NUMBER: DFN2DIP-4P4F0-030D070US940-FLLFLL

Luminous Intensity Polar Plot

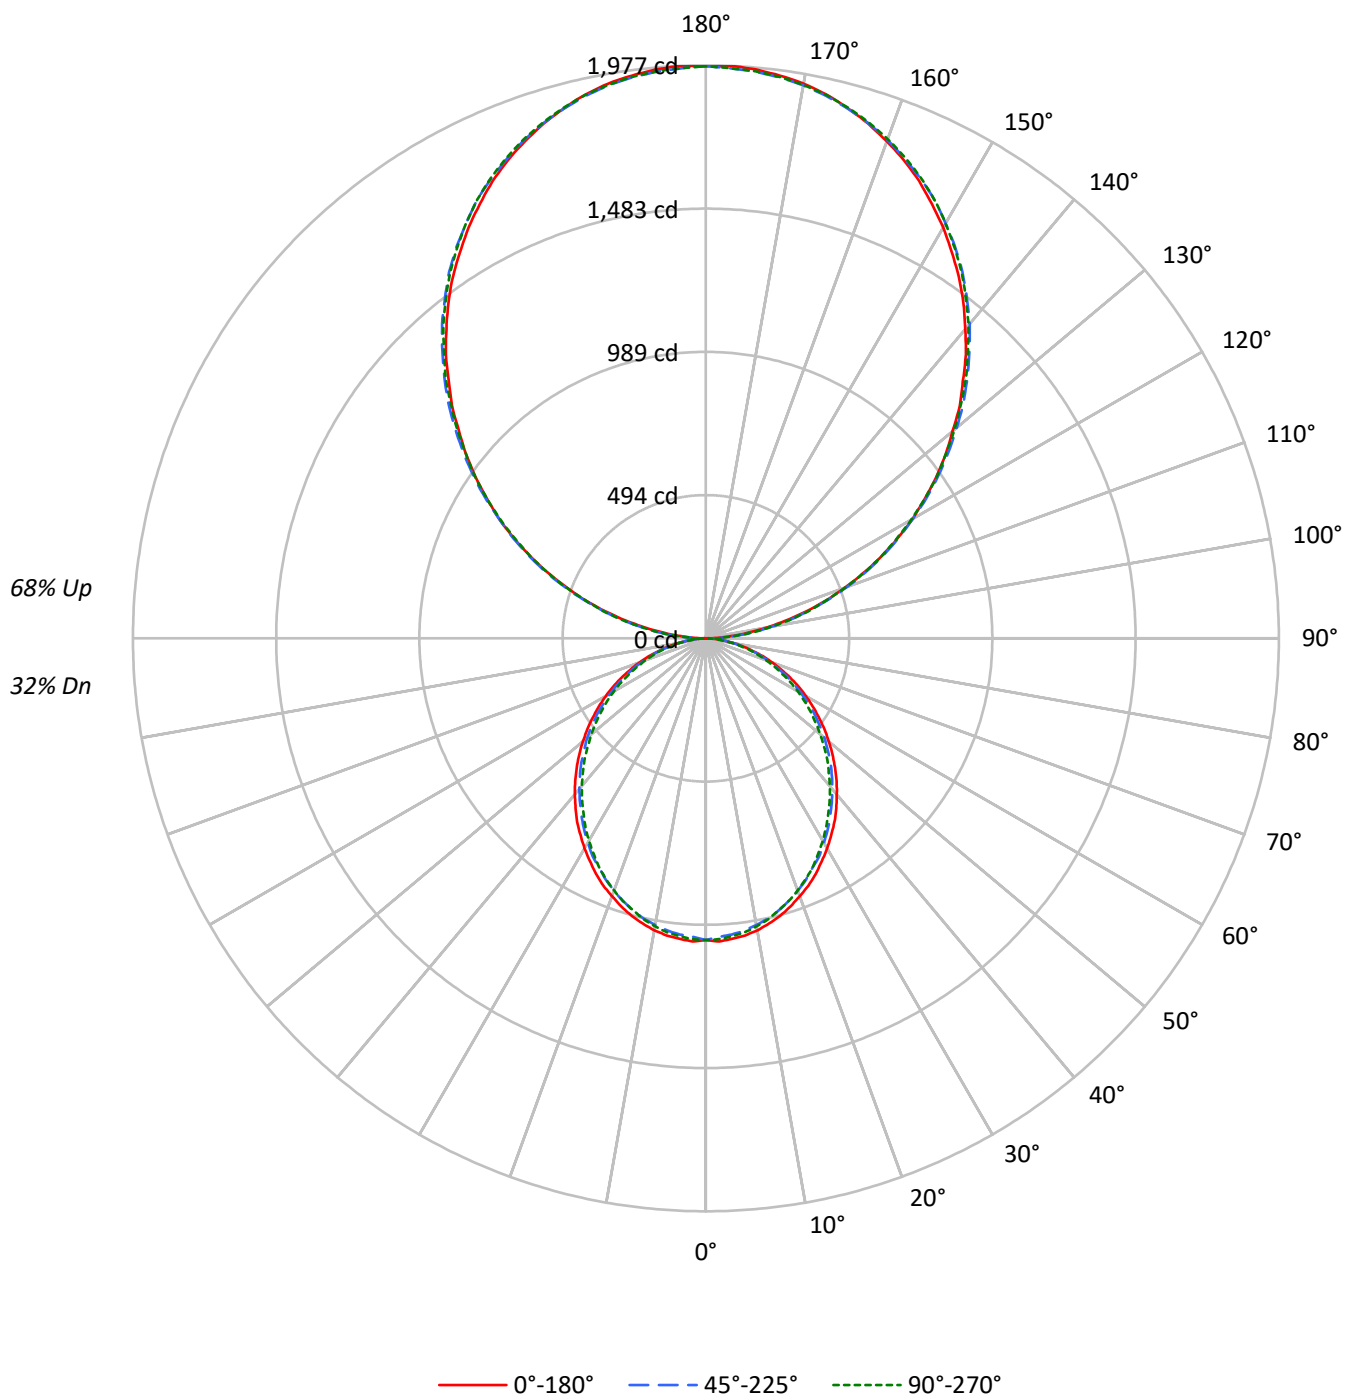

TEST NUMBER: P921386

CATALOG NUMBER: DFN2DIP-4P4F0-030D070US940-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	103	103	103	103	93	93	93	93	74	74	74	56	56	56	40	40	40
1	94	90	86	82	84	81	78	75	64	62	60	49	48	47	35	34	34
2	85	78	72	67	77	71	66	61	56	53	50	43	41	39	31	30	28
3	78	69	62	56	70	62	56	51	50	45	42	38	35	33	28	26	24
4	71	61	53	47	64	55	48	43	44	39	36	34	31	28	25	23	21
5	65	54	46	40	59	49	42	37	39	34	31	30	27	24	22	20	18
6	60	48	40	35	54	44	37	32	35	30	27	27	24	21	20	18	16
7	55	43	36	30	50	40	33	28	32	27	23	25	21	19	18	16	14
8	51	39	32	27	46	36	29	25	29	24	21	23	19	17	17	14	13
9	48	36	29	24	43	33	26	22	27	22	18	21	17	15	15	13	11
10	44	33	26	21	40	30	24	20	24	20	16	19	16	13	14	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	675	675	675
5°	676	666	671
10°	671	657	662
15°	661	647	648
20°	648	632	634
25°	635	614	617
30°	618	598	596
35°	602	578	574
40°	583	558	552
45°	564	539	531
50°	543	518	505
55°	521	494	482
60°	496	466	456
65°	469	436	425
70°	434	400	391
75°	386	357	361
80°	328	303	302
85°	238	208	203

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1493 cd/sqm

TEST NUMBER: P921386

CATALOG NUMBER: DFN2DIP-4P4F0-030D070US940-FLLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	98.0	1.2
10°-20°	275.6	3.4
20°-30°	405.1	5.0
30°-40°	470.5	5.8
40°-50°	469.9	5.7
50°-60°	409.8	5.0
60°-70°	302.9	3.7
70°-80°	171.4	2.1
80°-90°	50.8	0.6
90°-100°	122.2	1.5
100°-110°	388.1	4.7
110°-120°	664.2	8.1
120°-130°	873.6	10.7
130°-140°	980.5	12.0
140°-150°	961.5	11.8
150°-160°	806.6	9.9
160°-170°	534.9	6.5
170°-180°	187.0	2.3
0°-30°	778.7	9.5
0°-40°	1249.2	15.3
0°-60°	2128.9	26.0
0°-90°	2654.0	32.5
90°-120°	1174.5	14.4
90°-150°	3990.1	48.8
90°-180°	5519.0	67.5
0°-180°	8172.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1041	1041	1041	1041	1041	
5°	1041	1037	1026	1034	1032	99
15°	991	985	972	976	971	279
25°	897	889	872	874	872	413
35°	774	764	748	742	737	483
45°	630	623	608	597	592	486
55°	476	470	458	446	442	426
65°	321	315	305	296	291	318
75°	168	166	161	155	157	179
85°	41	40	39	36	35	46
90°	2	21	58	55	56	8
95°	87	104	107	107	104	97
105°	358	363	367	370	370	378
115°	667	676	673	671	667	659
125°	970	984	980	974	972	866
135°	1254	1272	1276	1274	1269	969
145°	1522	1534	1544	1546	1539	951
155°	1741	1746	1751	1759	1754	801
165°	1894	1892	1892	1904	1896	534
175°	1970	1966	1962	1974	1964	187
180°	1974	1974	1974	1974	1974	

TEST NUMBER: P921386

CATALOG NUMBER: DFN2DIP-4P4F0-030D070US940-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1040.9	1040.9	1040.9	1040.9	1040.9
2.5°	1047.0	1042.0	1030.9	1040.9	1039.0
5°	1040.9	1037.0	1025.9	1033.9	1032.0
7.5°	1033.9	1028.0	1016.9	1025.0	1023.0
10°	1023.0	1015.9	1004.0	1011.9	1009.0
12.5°	1007.9	1001.9	990.0	994.9	992.9
15°	990.9	985.0	971.9	975.9	970.9
17.5°	969.8	963.9	950.8	955.8	950.8
20°	946.8	940.8	926.8	929.8	925.9
22.5°	923.9	914.9	901.8	901.8	899.7
25°	896.8	888.9	871.8	873.8	871.8
27.5°	866.7	859.7	846.8	843.8	838.8
30°	836.8	828.8	813.8	810.7	806.7
32.5°	804.8	798.8	782.7	776.7	772.7
35°	773.7	763.7	747.7	741.6	736.6
37.5°	738.7	729.7	713.6	706.6	701.6
40°	702.7	694.6	678.6	669.7	665.7
42.5°	667.6	659.6	643.6	633.6	627.6
45°	629.6	622.6	607.5	596.6	592.5
47.5°	592.5	585.6	569.5	558.5	552.5
50°	553.5	548.5	534.5	520.5	515.5
52.5°	515.5	508.5	495.5	484.5	477.4
55°	476.5	470.5	458.4	446.5	441.5
57.5°	437.4	432.4	419.4	407.3	403.3
60°	398.3	394.4	380.4	369.3	366.4
62.5°	360.3	353.3	343.3	333.3	329.3
65°	321.4	315.3	305.3	296.3	291.3
67.5°	281.3	276.3	267.2	260.3	256.3
70°	244.2	240.2	231.2	224.2	220.3
72.5°	206.3	202.2	197.2	190.2	187.3
75°	168.1	166.2	161.1	155.2	157.2
77.5°	134.1	130.1	128.0	125.1	122.2
80°	100.1	99.1	97.0	94.1	92.1
82.5°	68.0	68.0	67.1	63.0	63.0
85°	41.0	40.0	39.1	36.0	35.0
87.5°	18.0	16.1	14.0	11.1	10.0
90°	1.8	21.4	58.3	54.8	56.5
92.5°	36.9	50.0	51.8	53.6	53.6
95°	86.9	103.5	106.6	106.6	103.5
97.5°	144.6	160.1	166.7	166.7	166.7
100°	211.2	225.0	229.7	229.7	227.9
102.5°	281.5	291.6	298.2	300.0	298.2
105°	358.3	363.0	366.6	369.6	369.6
107.5°	434.4	441.6	441.6	442.8	434.4
110°	508.3	517.8	517.8	517.8	513.0

TEST NUMBER: P921386

CATALOG NUMBER: DFN2DIP-4P4F0-030D070US940-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	588.0	598.2	596.4	591.6	588.0
115°	666.6	676.1	673.2	671.4	666.6
117.5°	744.5	757.6	749.3	744.5	739.8
120°	823.0	836.2	823.0	823.0	817.7
122.5°	894.5	911.1	902.9	898.0	894.5
125°	969.5	984.4	979.6	974.3	972.5
127.5°	1042.7	1061.1	1054.6	1047.5	1042.7
130°	1111.2	1132.6	1129.6	1126.1	1119.5
132.5°	1187.9	1204.6	1205.8	1197.5	1192.7
135°	1254.0	1272.4	1276.0	1274.2	1269.4
137.5°	1327.8	1342.6	1345.6	1344.4	1337.3
140°	1392.7	1407.6	1415.9	1415.9	1409.3
142.5°	1459.3	1474.2	1478.9	1480.7	1474.2
145°	1522.4	1534.3	1543.8	1545.6	1539.1
147.5°	1579.0	1593.8	1601.0	1603.9	1597.4
150°	1637.3	1647.3	1653.9	1659.3	1653.9
152.5°	1689.0	1699.2	1707.4	1714.0	1707.4
155°	1740.8	1745.5	1751.0	1759.3	1753.9
157.5°	1785.5	1789.0	1792.0	1803.9	1795.5
160°	1825.3	1828.9	1830.7	1840.8	1833.6
162.5°	1862.2	1862.2	1864.0	1875.3	1867.0
165°	1893.7	1891.9	1891.9	1903.9	1895.5
167.5°	1922.3	1917.0	1917.0	1928.9	1920.6
170°	1943.8	1939.0	1937.2	1949.1	1939.0
172.5°	1958.6	1953.8	1952.0	1964.0	1953.8
175°	1970.5	1965.8	1962.2	1974.1	1964.0
177.5°	1977.1	1972.3	1968.7	1978.9	1968.7
180°	1974.1	1974.1	1974.1	1974.1	1974.1

TEST NUMBER: P921386

CATALOG NUMBER: DFN2DIP-4P4F0-030D070US940-FLFL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	4.04	4.76	5.13	5.85	7.35	3.59	4.32	4.69	5.41	6.91
	3H	5.69	6.34	6.80	7.44	8.96	5.20	5.85	6.30	6.95	8.47
	4H	6.28	6.89	7.39	7.99	9.52	5.78	6.40	6.90	7.50	9.02
	6H	6.67	7.24	7.80	8.35	9.88	6.17	6.74	7.30	7.85	9.38
	8H	6.78	7.32	7.90	8.44	9.97	6.28	6.81	7.40	7.93	9.46
	12H	6.82	7.33	7.95	8.45	10.00	6.31	6.83	7.44	7.94	9.49
4H	2H	4.48	5.10	5.60	6.20	7.72	4.13	4.74	5.25	5.84	7.37
	3H	6.34	6.85	7.47	7.98	9.52	5.93	6.45	7.06	7.58	9.11
	4H	7.05	7.53	8.18	8.64	10.20	6.63	7.10	7.76	8.22	9.78
	6H	7.57	7.97	8.70	9.11	10.66	7.14	7.54	8.27	8.68	10.23
	8H	7.72	8.09	8.85	9.23	10.79	7.28	7.66	8.42	8.79	10.35
	12H	7.79	8.13	8.94	9.27	10.84	7.34	7.68	8.49	8.82	10.39
8H	4H	7.24	7.62	8.38	8.75	10.32	6.86	7.24	8.00	8.37	9.94
	6H	7.87	8.18	9.03	9.36	10.92	7.49	7.80	8.65	8.98	10.54
	8H	8.10	8.37	9.26	9.52	11.10	7.70	7.98	8.87	9.13	10.71
	12H	8.22	8.46	9.39	9.61	11.23	7.81	8.05	8.98	9.20	10.82
12H	4H	7.22	7.56	8.37	8.71	10.28	6.85	7.19	8.01	8.34	9.91
	6H	7.90	8.17	9.06	9.33	10.91	7.53	7.80	8.69	8.96	10.54
	8H	8.14	8.38	9.31	9.53	11.15	7.76	8.00	8.93	9.15	10.77