

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P921425

Luminaire Tested: DFN2DIP-4P4F0-050D040US940-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P921425
REPORT IS A COMBINATION OF REPORTS P900616 AND P897523
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P4F0-050D040US940-RLLONL
Description: 4 foot, 90deg - 4way Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open
No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7321.0 lumens
Efficiency: N/A
Efficacy: 90.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 4.07' x L: 4.07' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 80.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9951
Total Harmonic Distortion (THDi): 0.07
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P921425

CATALOG NUMBER: DFN2DIP-4P4F0-050D040US940-RLLONL

Luminous Intensity Polar Plot

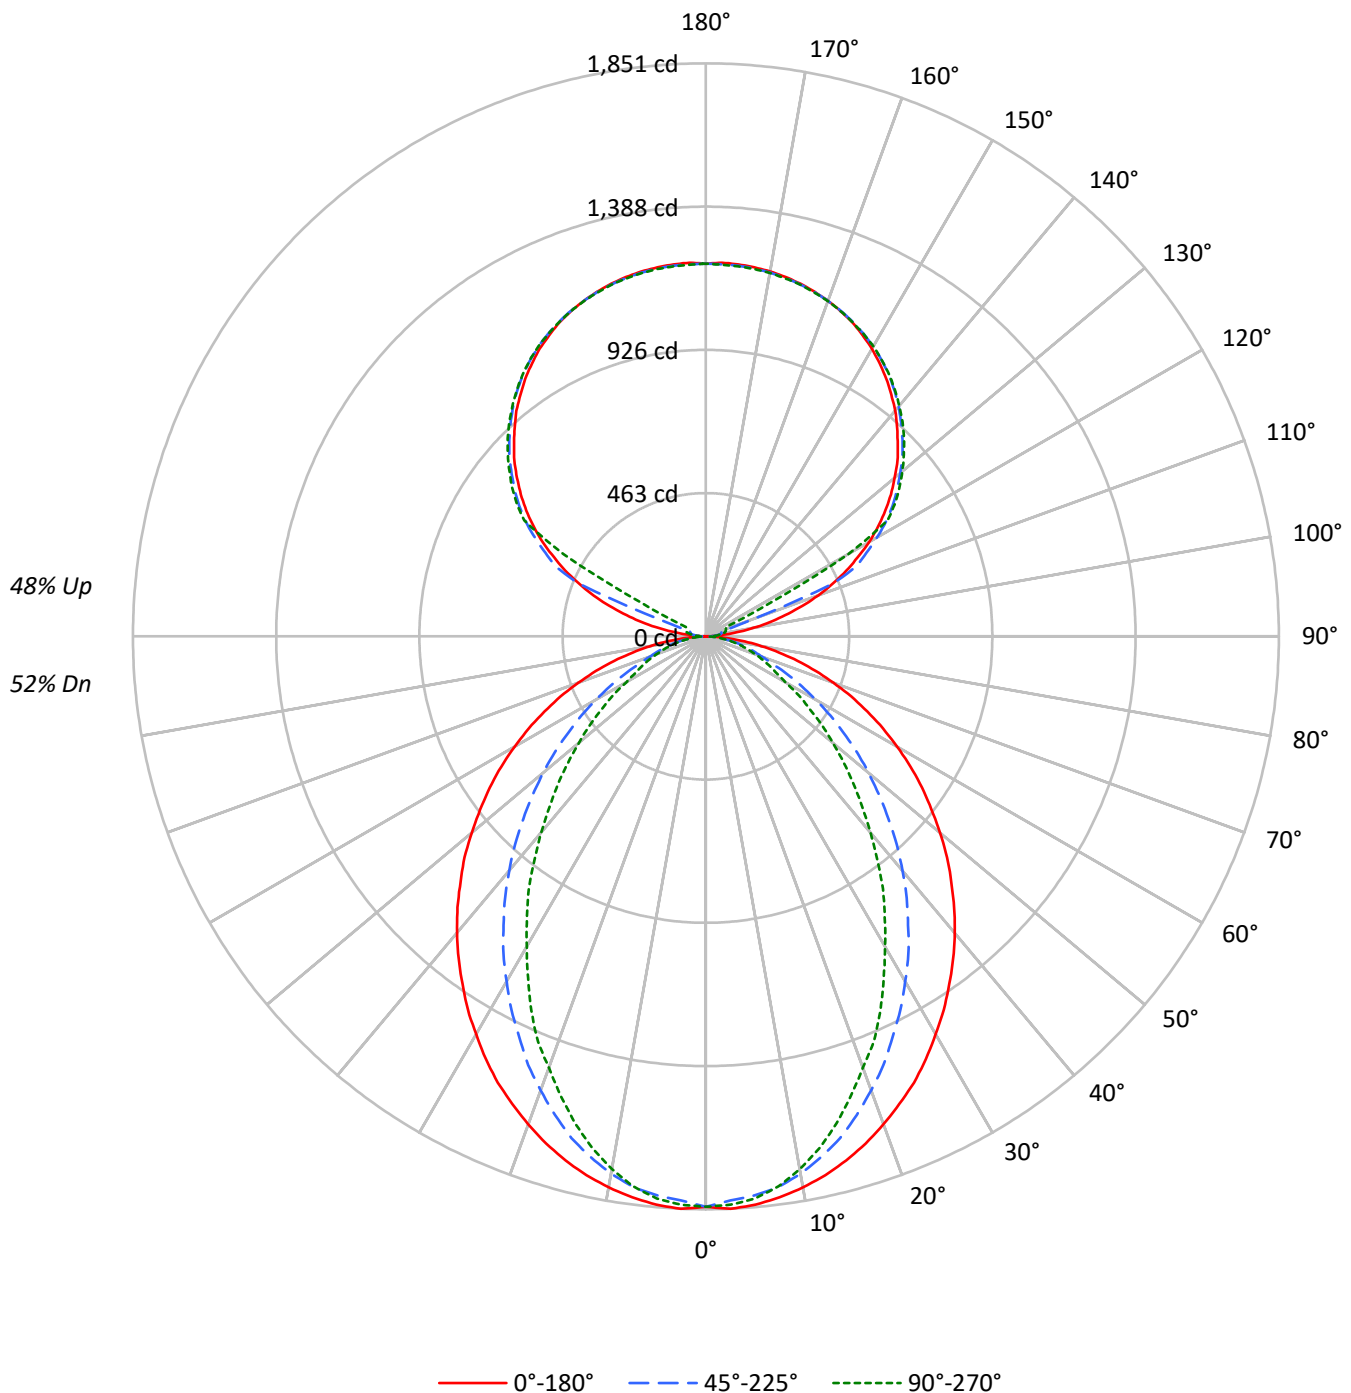

TEST NUMBER: P921425

CATALOG NUMBER: DFN2DIP-4P4F0-050D040US940-RLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	108	108	108	108	99	99	99	99	84	84	84	70	70	70	58	58	58
1	99	95	91	87	91	88	84	82	75	72	70	63	61	60	52	51	50
2	90	83	77	72	83	77	72	68	66	62	59	56	53	51	46	44	43
3	83	74	66	61	76	68	62	57	59	54	50	50	46	43	41	39	37
4	76	65	58	52	70	61	54	49	52	47	43	45	41	38	37	35	32
5	70	59	51	45	64	55	48	42	47	42	38	40	36	33	34	31	28
6	65	53	45	39	60	49	42	37	43	37	33	37	32	29	31	28	25
7	60	48	40	35	55	45	38	33	39	33	29	33	29	26	28	25	23
8	56	44	36	31	51	41	34	29	36	30	26	31	26	23	26	23	20
9	52	40	32	28	48	37	31	26	33	27	24	28	24	21	24	21	19
10	48	37	30	25	45	34	28	24	30	25	21	26	22	19	23	19	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1195	1195	1195
5°	1197	1177	1184
10°	1186	1154	1146
15°	1169	1116	1087
20°	1148	1064	1014
25°	1126	1005	944
30°	1096	945	855
35°	1067	881	776
40°	1038	814	686
45°	1004	739	605
50°	968	664	525
55°	931	584	448
60°	888	500	370
65°	839	415	333
70°	779	335	302
75°	704	296	276
80°	596	250	241
85°	417	169	184

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1004 cd/sqm

TEST NUMBER: P921425

CATALOG NUMBER: DFN2DIP-4P4F0-050D040US940-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	172.7	2.4
10°-20°	474.1	6.5
20°-30°	665.6	9.1
30°-40°	725.6	9.9
40°-50°	666.9	9.1
50°-60°	523.7	7.2
60°-70°	340.9	4.7
70°-80°	175.5	2.4
80°-90°	46.9	0.6
90°-100°	39.7	0.5
100°-110°	148.0	2.0
110°-120°	392.4	5.4
120°-130°	650.9	8.9
130°-140°	691.4	9.4
140°-150°	642.6	8.8
150°-160°	516.6	7.1
160°-170°	332.9	4.5
170°-180°	114.6	1.6
0°-30°	1312.4	17.9
0°-40°	2038.0	27.8
0°-60°	3228.6	44.1
0°-90°	3791.9	51.8
90°-120°	580.1	7.9
90°-150°	2565.0	35.0
90°-180°	3529.0	48.2
0°-180°	7321.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1843	1843	1843	1843	1843	
5°	1843	1834	1813	1828	1823	175
15°	1753	1734	1678	1646	1629	494
25°	1591	1538	1427	1359	1334	732
35°	1371	1286	1139	1034	997	858
45°	1121	1009	834	715	675	865
55°	852	722	542	442	410	761
65°	575	440	290	234	228	570
75°	307	190	133	122	120	324
85°	72	37	32	32	32	82
90°	1	10	17	22	24	7
95°	56	28	34	38	38	67
105°	265	291	53	63	66	283
115°	501	516	537	134	72	493
125°	708	720	736	742	745	632
135°	876	890	898	907	905	677
145°	1016	1016	1030	1036	1032	636
155°	1119	1112	1122	1127	1120	516
165°	1179	1174	1177	1183	1177	333
175°	1206	1200	1202	1208	1199	115
180°	1204	1204	1204	1204	1204	

TEST NUMBER: P921425

CATALOG NUMBER: DFN2DIP-4P4F0-050D040US940-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1842.7	1842.7	1842.7	1842.7	1842.7
2.5°	1851.0	1842.7	1824.4	1841.1	1837.7
5°	1842.7	1834.4	1812.7	1827.6	1822.7
7.5°	1827.6	1817.8	1794.4	1801.0	1792.6
10°	1807.7	1796.0	1762.7	1757.7	1747.7
12.5°	1782.7	1767.7	1722.6	1712.7	1694.2
15°	1752.7	1734.3	1677.7	1646.0	1629.3
17.5°	1717.6	1691.0	1620.9	1584.2	1557.5
20°	1677.7	1644.2	1560.8	1519.3	1482.5
22.5°	1634.3	1595.9	1499.1	1442.5	1417.6
25°	1590.9	1537.5	1427.4	1359.1	1334.0
27.5°	1539.3	1482.5	1360.8	1282.4	1244.0
30°	1484.3	1420.8	1287.4	1202.4	1157.3
32.5°	1430.8	1354.1	1217.5	1117.3	1075.6
35°	1370.8	1285.8	1139.1	1033.9	997.2
37.5°	1312.4	1220.7	1065.7	950.5	908.9
40°	1250.7	1150.8	988.8	870.5	827.2
42.5°	1187.4	1080.7	912.2	788.7	747.2
45°	1120.7	1008.9	833.8	715.3	675.3
47.5°	1057.3	939.0	758.8	640.3	603.7
50°	987.3	868.9	685.5	570.2	535.4
52.5°	918.8	793.7	615.4	505.3	473.7
55°	852.1	722.0	541.9	441.9	410.3
57.5°	783.8	650.4	477.0	383.6	356.9
60°	713.7	580.3	408.5	323.6	296.9
62.5°	645.4	512.0	350.2	270.2	256.9
65°	575.3	440.2	290.2	233.5	228.5
67.5°	508.6	373.5	233.5	205.1	200.1
70°	438.6	308.5	193.4	176.7	170.0
72.5°	371.9	248.4	161.8	148.5	145.1
75°	306.8	190.0	133.4	121.7	120.1
77.5°	241.8	135.0	105.1	98.4	95.0
80°	181.7	96.8	80.0	73.4	73.4
82.5°	126.7	65.1	55.0	51.6	51.6
85°	71.7	36.6	31.7	31.7	31.7
87.5°	26.8	13.3	13.3	11.7	11.7
90°	0.8	10.4	17.4	21.8	23.5
92.5°	21.8	18.3	20.9	22.6	23.5
95°	56.5	27.8	33.9	38.3	37.5
97.5°	101.9	30.5	44.4	47.1	47.9
100°	154.2	34.9	49.7	56.5	58.3
102.5°	211.6	210.0	51.4	60.9	63.6
105°	264.7	291.0	53.1	62.7	66.2
107.5°	326.6	348.4	54.9	64.5	67.9
110°	385.9	404.1	152.5	65.4	68.8

TEST NUMBER: P921425

CATALOG NUMBER: DFN2DIP-4P4F0-050D040US940-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	441.7	457.3	442.5	67.1	69.7
115°	500.8	515.6	537.4	134.1	71.5
117.5°	552.2	569.6	584.5	459.9	231.7
120°	609.8	622.8	638.5	649.0	531.4
122.5°	658.4	672.4	689.9	695.1	696.0
125°	708.1	719.5	736.0	742.2	744.8
127.5°	753.4	765.6	778.7	787.5	788.3
130°	796.1	810.1	819.6	829.2	828.4
132.5°	839.6	851.0	860.6	868.4	867.6
135°	876.3	890.3	898.0	906.8	905.1
137.5°	914.5	925.0	933.8	942.4	939.9
140°	952.0	959.0	968.6	976.4	972.1
142.5°	983.5	989.5	1000.9	1007.7	1003.4
145°	1016.5	1015.7	1030.4	1036.5	1032.2
147.5°	1045.2	1042.6	1057.4	1061.8	1058.4
150°	1073.1	1067.0	1081.0	1086.2	1081.8
152.5°	1096.6	1089.7	1102.7	1108.0	1101.9
155°	1119.3	1111.5	1121.9	1127.1	1120.2
157.5°	1137.6	1130.6	1138.5	1144.6	1137.6
160°	1153.2	1148.0	1153.2	1158.4	1152.4
162.5°	1167.2	1162.0	1166.4	1172.4	1164.6
165°	1179.4	1174.2	1176.8	1182.9	1176.8
167.5°	1189.0	1183.7	1186.4	1192.5	1184.6
170°	1196.9	1191.6	1193.3	1199.4	1191.6
172.5°	1202.0	1196.9	1198.6	1204.7	1196.9
175°	1206.3	1200.2	1202.0	1208.1	1199.4
177.5°	1208.1	1202.0	1202.9	1209.1	1201.2
180°	1203.8	1203.8	1203.8	1203.8	1203.8

TEST NUMBER: P921425

CATALOG NUMBER: DFN2DIP-4P4F0-050D040US940-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.95	8.80	8.90	9.76	11.01	3.91	4.76	4.86	5.72	6.97
	3H	9.64	10.39	10.60	11.36	12.63	5.11	5.86	6.07	6.83	8.10
	4H	10.25	10.96	11.22	11.94	13.22	5.56	6.27	6.53	7.24	8.52
	6H	10.68	11.33	11.66	12.31	13.61	5.88	6.54	6.87	7.52	8.81
	8H	10.81	11.43	11.80	12.43	13.72	5.97	6.60	6.96	7.59	8.88
	12H	10.87	11.47	11.87	12.45	13.77	6.02	6.61	7.01	7.60	8.91
4H	2H	7.97	8.69	8.95	9.66	10.94	4.51	5.23	5.49	6.20	7.48
	3H	9.81	10.40	10.80	11.41	12.70	5.87	6.46	6.86	7.46	8.76
	4H	10.51	11.05	11.50	12.04	13.36	6.42	6.96	7.42	7.96	9.27
	6H	11.03	11.49	12.04	12.51	13.83	6.84	7.31	7.85	8.32	9.64
	8H	11.21	11.64	12.22	12.65	13.98	6.97	7.40	7.98	8.42	9.75
	12H	11.31	11.70	12.33	12.73	14.06	7.04	7.43	8.06	8.46	9.79
8H	4H	10.48	10.91	11.49	11.92	13.25	6.70	7.14	7.71	8.15	9.48
	6H	11.05	11.41	12.08	12.46	13.79	7.22	7.58	8.26	8.64	9.96
	8H	11.27	11.59	12.31	12.63	13.97	7.42	7.73	8.46	8.77	10.12
	12H	11.41	11.69	12.46	12.73	14.12	7.54	7.82	8.58	8.85	10.24
12H	4H	10.43	10.82	11.46	11.85	13.18	6.71	7.10	7.74	8.13	9.46
	6H	11.02	11.34	12.07	12.38	13.73	7.27	7.59	8.32	8.63	9.98
	8H	11.25	11.53	12.30	12.56	13.95	7.49	7.77	8.53	8.80	10.19

END OF REPORT