

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P921449

Luminaire Tested: DFN2DIP-4P4F0-060D040US940-RLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P921449
REPORT IS A COMBINATION OF REPORTS P900618 AND P897523
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P4F0-060D040US940-RLLONL
Description: 4 foot, 90deg - 4way Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8078.9 lumens
Efficiency: N/A
Efficacy: 87.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 4.07' x L: 4.07' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 92.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P921449
CATALOG NUMBER: DFN2DIP-4P4F0-060D040US940-RLLONL

Luminous Intensity Polar Plot

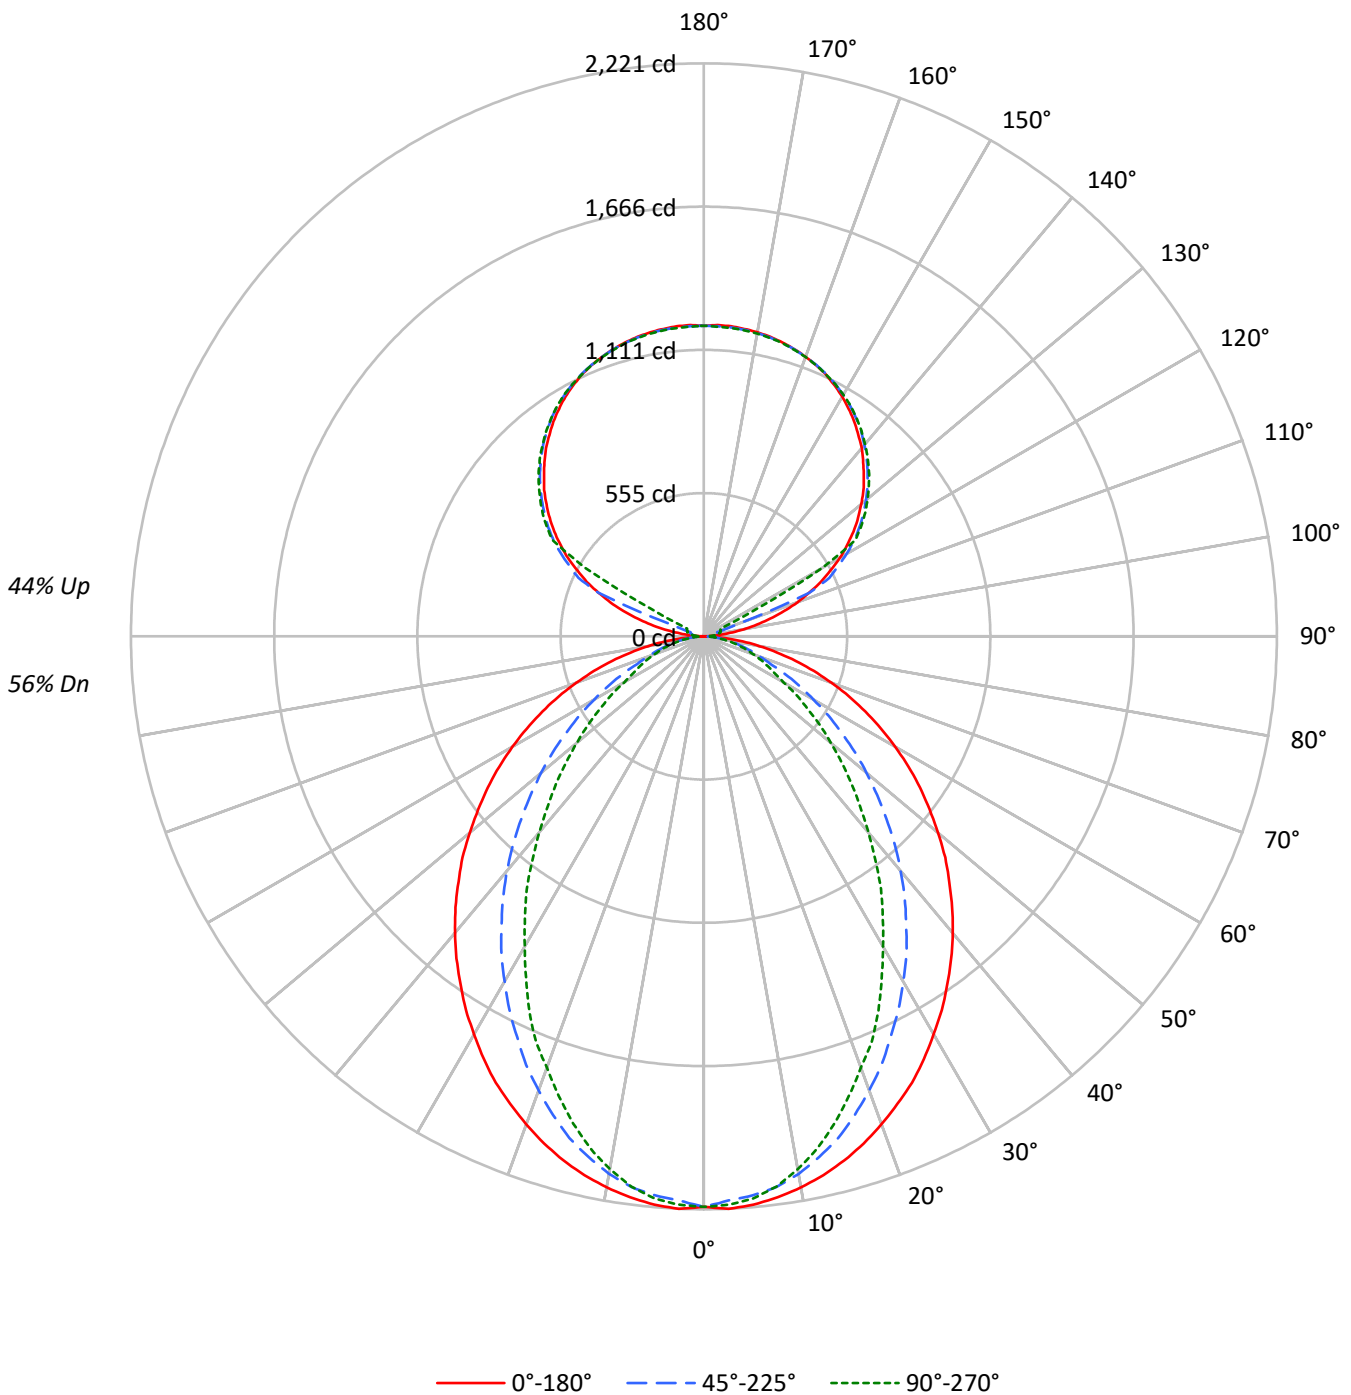



TEST NUMBER: P921449

CATALOG NUMBER: DFN2DIP-4P4F0-060D040US940-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	109	109	109	109	101	101	101	101	87	87	87	74	74	74	62	62	62	56	56	56	56
1	100	96	92	88	93	89	86	83	77	75	72	66	64	63	56	54	53	49	49	49	49
2	91	84	78	73	85	79	73	69	68	64	61	58	56	53	50	48	46	42	42	42	42
3	84	74	67	62	78	70	63	58	61	56	52	52	49	46	44	42	40	36	36	36	36
4	77	66	59	53	71	62	55	50	54	49	45	47	43	40	40	37	35	31	31	31	31
5	71	59	51	46	66	56	49	43	49	43	39	42	38	35	36	33	31	27	27	27	27
6	65	54	46	40	61	50	43	38	44	39	34	39	34	31	33	30	27	24	24	24	24
7	61	49	41	35	56	46	39	34	40	35	30	35	31	27	30	27	24	22	22	22	22
8	56	44	37	31	52	42	35	30	37	31	27	32	28	25	28	25	22	20	20	20	20
9	53	41	33	28	49	38	32	27	34	28	25	30	25	22	26	23	20	18	18	18	18
10	49	37	30	25	46	35	29	24	31	26	22	28	23	20	24	21	18	16	16	16	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1435	1435	1435
5°	1437	1412	1421
10°	1423	1385	1376
15°	1403	1340	1305
20°	1377	1277	1217
25°	1351	1207	1133
30°	1316	1134	1026
35°	1281	1057	932
40°	1245	976	824
45°	1204	887	726
50°	1162	797	630
55°	1117	701	538
60°	1066	600	443
65°	1007	497	400
70°	935	402	362
75°	845	355	331
80°	715	299	289
85°	500	202	221

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 1204 cd/sqm



TEST NUMBER: P921449

CATALOG NUMBER: DFN2DIP-4P4F0-060D040US940-RLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	207.2	2.6
10°-20°	568.9	7.0
20°-30°	798.7	9.9
30°-40°	870.7	10.8
40°-50°	800.3	9.9
50°-60°	628.5	7.8
60°-70°	409.1	5.1
70°-80°	210.6	2.6
80°-90°	55.9	0.7
90°-100°	39.7	0.5
100°-110°	148.0	1.8
110°-120°	392.4	4.9
120°-130°	650.9	8.1
130°-140°	691.4	8.6
140°-150°	642.6	8.0
150°-160°	516.6	6.4
160°-170°	332.9	4.1
170°-180°	114.6	1.4
0°-30°	1574.9	19.5
0°-40°	2445.6	30.3
0°-60°	3874.3	48.0
0°-90°	4549.9	56.3
90°-120°	580.1	7.2
90°-150°	2565.0	31.7
90°-180°	3529.0	43.7
0°-180°	8078.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2211	2211	2211	2211	2211	
5°	2211	2201	2175	2193	2187	210
15°	2103	2081	2013	1975	1955	593
25°	1909	1845	1713	1631	1601	878
35°	1645	1543	1367	1241	1197	1030
45°	1345	1211	1001	858	810	1039
55°	1022	866	650	530	492	914
65°	690	528	348	280	274	685
75°	368	228	160	146	144	389
85°	86	44	38	38	38	99
90°	1	10	17	22	24	8
95°	56	28	34	38	38	67
105°	265	291	53	63	66	283
115°	501	516	537	134	72	493
125°	708	720	736	742	745	632
135°	876	890	898	907	905	677
145°	1016	1016	1030	1036	1032	636
155°	1119	1112	1122	1127	1120	516
165°	1179	1174	1177	1183	1177	333
175°	1206	1200	1202	1208	1199	115
180°	1204	1204	1204	1204	1204	



TEST NUMBER: P921449

CATALOG NUMBER: DFN2DIP-4P4F0-060D040US940-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2211.3	2211.3	2211.3	2211.3	2211.3
2.5°	2221.3	2211.3	2189.1	2209.3	2205.3
5°	2211.3	2201.3	2175.1	2193.3	2187.3
7.5°	2193.3	2181.3	2153.3	2161.1	2151.2
10°	2169.2	2155.2	2115.3	2109.2	2097.2
12.5°	2139.3	2121.2	2067.1	2055.2	2033.1
15°	2103.2	2081.1	2013.1	1975.1	1955.2
17.5°	2061.2	2029.1	1945.0	1901.0	1869.0
20°	2013.1	1973.0	1873.0	1823.1	1779.0
22.5°	1961.1	1915.0	1798.9	1731.0	1701.0
25°	1909.2	1845.0	1713.0	1631.0	1600.9
27.5°	1847.2	1779.0	1632.9	1538.8	1492.8
30°	1781.1	1704.9	1544.8	1442.9	1388.7
32.5°	1717.0	1624.9	1461.0	1340.8	1290.7
35°	1645.0	1542.9	1366.9	1240.7	1196.6
37.5°	1574.9	1464.7	1278.8	1140.6	1090.7
40°	1500.8	1380.9	1186.6	1044.5	992.6
42.5°	1424.9	1296.8	1094.7	946.5	896.6
45°	1344.8	1210.6	1000.7	858.4	810.4
47.5°	1268.8	1126.8	910.6	768.4	724.4
50°	1184.7	1042.7	822.5	684.3	642.5
52.5°	1102.5	952.4	738.4	606.4	568.4
55°	1022.5	866.5	650.3	530.4	492.3
57.5°	940.6	780.4	572.4	460.3	428.2
60°	856.5	696.4	490.3	388.3	356.2
62.5°	774.5	614.5	420.2	324.2	308.3
65°	690.5	528.2	348.2	280.3	274.1
67.5°	610.4	448.2	280.3	246.1	240.1
70°	526.3	370.2	232.0	212.1	204.0
72.5°	446.3	298.1	194.0	178.2	174.1
75°	368.2	228.0	160.1	146.1	144.2
77.5°	290.3	162.0	126.1	118.1	114.0
80°	218.0	116.1	95.9	88.1	88.1
82.5°	152.0	78.1	66.0	62.0	62.0
85°	86.0	44.0	38.0	38.0	38.0
87.5°	32.1	16.0	16.0	14.0	14.0
90°	0.8	10.4	17.4	21.8	23.5
92.5°	21.8	18.3	20.9	22.6	23.5
95°	56.5	27.8	33.9	38.3	37.5
97.5°	101.9	30.5	44.4	47.1	47.9
100°	154.2	34.9	49.7	56.5	58.3
102.5°	211.6	210.0	51.4	60.9	63.6
105°	264.7	291.0	53.1	62.7	66.2
107.5°	326.6	348.4	54.9	64.5	67.9
110°	385.9	404.1	152.5	65.4	68.8



TEST NUMBER: P921449

CATALOG NUMBER: DFN2DIP-4P4F0-060D040US940-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	441.7	457.3	442.5	67.1	69.7
115°	500.8	515.6	537.4	134.1	71.5
117.5°	552.2	569.6	584.5	459.9	231.7
120°	609.8	622.8	638.5	649.0	531.4
122.5°	658.4	672.4	689.9	695.1	696.0
125°	708.1	719.5	736.0	742.2	744.8
127.5°	753.4	765.6	778.7	787.5	788.3
130°	796.1	810.1	819.6	829.2	828.4
132.5°	839.6	851.0	860.6	868.4	867.6
135°	876.3	890.3	898.0	906.8	905.1
137.5°	914.5	925.0	933.8	942.4	939.9
140°	952.0	959.0	968.6	976.4	972.1
142.5°	983.5	989.5	1000.9	1007.7	1003.4
145°	1016.5	1015.7	1030.4	1036.5	1032.2
147.5°	1045.2	1042.6	1057.4	1061.8	1058.4
150°	1073.1	1067.0	1081.0	1086.2	1081.8
152.5°	1096.6	1089.7	1102.7	1108.0	1101.9
155°	1119.3	1111.5	1121.9	1127.1	1120.2
157.5°	1137.6	1130.6	1138.5	1144.6	1137.6
160°	1153.2	1148.0	1153.2	1158.4	1152.4
162.5°	1167.2	1162.0	1166.4	1172.4	1164.6
165°	1179.4	1174.2	1176.8	1182.9	1176.8
167.5°	1189.0	1183.7	1186.4	1192.5	1184.6
170°	1196.9	1191.6	1193.3	1199.4	1191.6
172.5°	1202.0	1196.9	1198.6	1204.7	1196.9
175°	1206.3	1200.2	1202.0	1208.1	1199.4
177.5°	1208.1	1202.0	1202.9	1209.1	1201.2
180°	1203.8	1203.8	1203.8	1203.8	1203.8



TEST NUMBER: P921449
 CATALOG NUMBER: DFN2DIP-4P4F0-060D040US940-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.99	9.87	9.90	10.80	11.98	4.95	5.84	5.86	6.76	7.94
	3H	10.68	11.47	11.60	12.40	13.61	6.15	6.94	7.07	7.87	9.07
	4H	11.29	12.04	12.23	12.98	14.19	6.60	7.35	7.53	8.28	9.50
	6H	11.72	12.41	12.67	13.35	14.58	6.92	7.61	7.87	8.56	9.78
	8H	11.85	12.51	12.81	13.47	14.69	7.02	7.67	7.97	8.63	9.86
	12H	11.92	12.54	12.88	13.49	14.74	7.06	7.69	8.02	8.64	9.89
4H	2H	9.02	9.76	9.96	10.70	11.91	5.56	6.30	6.50	7.24	8.46
	3H	10.86	11.48	11.81	12.44	13.67	6.91	7.53	7.86	8.50	9.73
	4H	11.55	12.12	12.51	13.08	14.34	7.47	8.03	8.43	8.99	10.25
	6H	12.08	12.56	13.05	13.55	14.80	7.89	8.38	8.86	9.36	10.62
	8H	12.26	12.71	13.23	13.69	14.96	8.02	8.48	9.00	9.45	10.72
	12H	12.36	12.77	13.35	13.76	15.04	8.09	8.50	9.08	9.49	10.77
8H	4H	11.53	11.98	12.50	12.96	14.23	7.75	8.21	8.73	9.19	10.45
	6H	12.10	12.48	13.10	13.50	14.76	8.28	8.65	9.28	9.67	10.94
	8H	12.32	12.65	13.33	13.66	14.95	8.47	8.80	9.48	9.81	11.09
	12H	12.47	12.76	13.48	13.76	15.09	8.59	8.88	9.60	9.89	11.22
12H	4H	11.48	11.89	12.47	12.89	14.16	7.76	8.17	8.75	9.17	10.44
	6H	12.08	12.41	13.08	13.42	14.70	8.33	8.66	9.33	9.67	10.95
	8H	12.30	12.60	13.31	13.60	14.93	8.54	8.83	9.55	9.84	11.17