

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P921475

Luminaire Tested: DFN2DIP-4P4F0-070D050US940-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P921475
REPORT IS A COMBINATION OF REPORTS P900631 AND P897523
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P4F0-070D050US940-FLLONL
Description: 4 foot, 90deg - 4way Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 10593.6 lumens
Efficiency: N/A
Efficacy: 92.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 4.07' x L: 4.07' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 114.5
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P921475

CATALOG NUMBER: DFN2DIP-4P4F0-070D050US940-FLLONL

Luminous Intensity Polar Plot

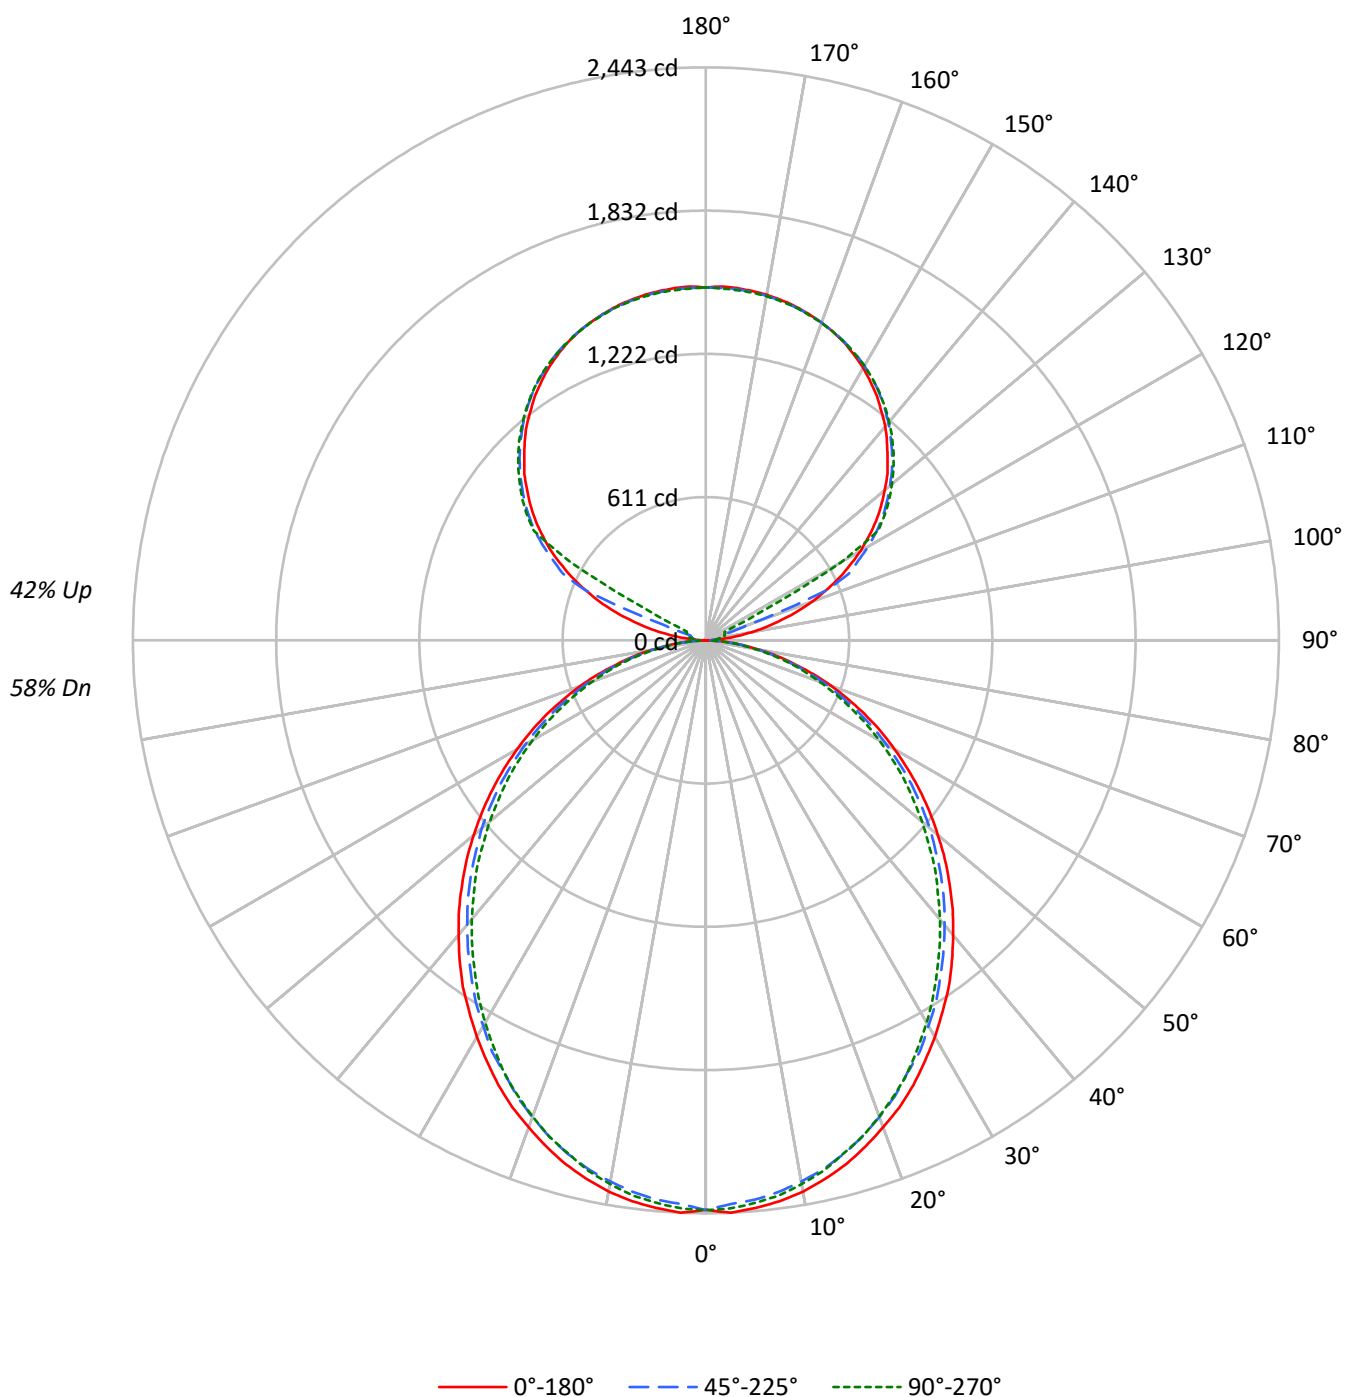

TEST NUMBER: P921475

CATALOG NUMBER: DFN2DIP-4P4F0-070D050US940-FLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	109	109	109	109	102	102	102	102	88	88	88	75	75	75	64	64	64
1	100	95	91	88	93	89	86	82	77	75	72	66	65	63	56	55	54
2	91	83	77	72	84	78	72	68	68	64	60	58	55	53	50	47	45
3	83	73	66	60	77	69	62	57	60	55	50	52	48	44	44	41	39
4	76	65	57	51	70	61	54	48	53	47	43	46	42	38	39	36	33
5	70	58	50	43	65	54	47	41	48	42	37	41	37	33	35	32	29
6	64	52	44	38	60	49	41	36	43	37	32	37	33	29	32	29	26
7	59	47	39	33	55	44	37	32	39	33	29	34	29	26	29	26	23
8	55	43	35	29	51	40	33	28	36	30	26	31	26	23	27	23	20
9	51	39	31	26	48	37	30	25	33	27	23	29	24	21	25	21	18
10	48	36	29	24	45	34	27	23	30	25	21	27	22	19	23	19	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1576	1576	1576
5°	1578	1554	1565
10°	1566	1534	1544
15°	1543	1509	1512
20°	1512	1474	1478
25°	1481	1433	1440
30°	1442	1394	1390
35°	1406	1349	1338
40°	1361	1303	1289
45°	1316	1257	1238
50°	1266	1209	1179
55°	1215	1153	1126
60°	1157	1086	1064
65°	1093	1018	991
70°	1013	934	913
75°	901	834	842
80°	766	707	704
85°	556	486	475

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1316 cd/sqm

TEST NUMBER: P921475

CATALOG NUMBER: DFN2DIP-4P4F0-070D050US940-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	228.6	2.2
10°-20°	643.2	6.1
20°-30°	945.2	8.9
30°-40°	1097.8	10.4
40°-50°	1096.5	10.4
50°-60°	956.1	9.0
60°-70°	706.8	6.7
70°-80°	399.9	3.8
80°-90°	108.2	1.0
90°-100°	49.6	0.5
100°-110°	185.0	1.7
110°-120°	490.6	4.6
120°-130°	813.6	7.7
130°-140°	864.3	8.2
140°-150°	803.2	7.6
150°-160°	645.8	6.1
160°-170°	416.1	3.9
170°-180°	143.2	1.4
0°-30°	1817.0	17.2
0°-40°	2914.9	27.5
0°-60°	4967.4	46.9
0°-90°	6182.2	58.4
90°-120°	725.2	6.8
90°-150°	3206.2	30.3
90°-180°	4411.0	41.6
0°-180°	10593.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2429	2429	2429	2429	2429	
5°	2429	2420	2394	2412	2408	231
15°	2312	2298	2268	2277	2266	651
25°	2093	2074	2034	2039	2034	963
35°	1805	1782	1745	1730	1719	1127
45°	1469	1453	1418	1392	1383	1134
55°	1112	1098	1070	1042	1030	994
65°	750	736	712	691	680	741
75°	392	388	376	362	367	419
85°	96	94	91	84	82	107
90°	1	13	22	27	29	10
95°	71	35	42	48	47	84
105°	331	364	66	78	83	354
115°	626	644	672	168	89	616
125°	885	899	920	928	931	789
135°	1095	1113	1122	1134	1131	846
145°	1271	1270	1288	1296	1290	795
155°	1399	1389	1402	1409	1400	645
165°	1474	1468	1471	1478	1471	416
175°	1508	1500	1502	1510	1499	144
180°	1505	1505	1505	1505	1505	

TEST NUMBER: P921475

CATALOG NUMBER: DFN2DIP-4P4F0-070D050US940-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2428.8	2428.8	2428.8	2428.8	2428.8
2.5°	2442.9	2431.2	2405.5	2428.8	2424.3
5°	2428.8	2419.7	2393.9	2412.4	2408.0
7.5°	2412.4	2398.5	2372.8	2391.7	2386.9
10°	2386.9	2370.5	2342.5	2361.2	2354.2
12.5°	2351.7	2337.9	2309.9	2321.5	2316.8
15°	2312.1	2298.2	2267.7	2277.2	2265.5
17.5°	2263.0	2249.2	2218.7	2230.3	2218.7
20°	2209.2	2195.4	2162.7	2169.6	2160.4
22.5°	2155.7	2134.7	2104.2	2104.2	2099.4
25°	2092.6	2073.9	2034.3	2038.8	2034.3
27.5°	2022.4	2006.1	1975.9	1968.9	1957.2
30°	1952.6	1933.7	1898.8	1891.9	1882.4
32.5°	1877.7	1863.9	1826.4	1812.3	1802.9
35°	1805.4	1782.1	1744.6	1730.5	1718.9
37.5°	1723.6	1702.5	1665.1	1648.8	1637.1
40°	1639.6	1620.8	1583.3	1562.5	1553.1
42.5°	1557.8	1539.0	1501.8	1478.3	1464.4
45°	1469.1	1452.8	1417.6	1392.0	1382.6
47.5°	1382.6	1366.3	1328.8	1303.1	1289.2
50°	1291.5	1279.8	1247.1	1214.4	1202.7
52.5°	1202.7	1186.4	1156.2	1130.4	1114.0
55°	1111.8	1097.7	1069.7	1041.7	1030.0
57.5°	1020.7	1009.0	978.5	950.5	941.1
60°	929.4	920.2	887.6	861.8	854.9
62.5°	840.7	824.4	801.1	777.8	768.4
65°	749.8	735.7	712.4	691.3	679.7
67.5°	656.4	644.5	623.7	607.3	597.9
70°	569.9	560.5	539.4	523.1	513.9
72.5°	481.2	471.8	460.1	443.8	436.8
75°	392.3	387.8	375.9	362.0	366.8
77.5°	313.0	303.5	298.8	291.9	285.0
80°	233.6	231.2	226.5	219.5	214.8
82.5°	158.8	158.8	156.6	147.2	147.2
85°	95.7	93.5	91.2	84.0	81.8
87.5°	42.1	37.5	32.7	25.8	23.3
90°	1.1	13.0	21.8	27.3	29.3
92.5°	27.3	22.9	26.1	28.4	29.3
95°	70.7	34.8	42.4	48.0	46.8
97.5°	127.3	38.2	55.5	58.9	59.8
100°	192.8	43.6	62.1	70.7	72.9
102.5°	264.6	262.4	64.3	76.2	79.5
105°	331.0	363.7	66.4	78.4	82.8
107.5°	408.3	435.4	68.7	80.5	85.0
110°	482.4	505.2	190.6	81.7	86.0



TEST NUMBER: P921475

CATALOG NUMBER: DFN2DIP-4P4F0-070D050US940-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	552.1	571.6	553.1	83.8	87.1
115°	626.1	644.5	671.8	167.7	89.3
117.5°	690.3	712.0	730.7	574.8	289.6
120°	762.1	778.5	798.1	811.2	664.1
122.5°	823.0	840.5	862.4	868.9	870.0
125°	885.1	899.4	920.1	927.6	930.9
127.5°	941.7	957.0	973.5	984.3	985.3
130°	995.1	1012.6	1024.5	1036.5	1035.5
132.5°	1049.6	1063.8	1075.7	1085.6	1084.5
135°	1095.4	1112.9	1122.5	1133.5	1131.3
137.5°	1143.2	1156.3	1167.2	1178.1	1174.9
140°	1190.0	1198.8	1210.7	1220.5	1215.1
142.5°	1229.3	1237.0	1251.1	1259.7	1254.3
145°	1270.7	1269.5	1288.0	1295.7	1290.2
147.5°	1306.5	1303.2	1321.8	1327.2	1322.9
150°	1341.4	1333.8	1351.2	1357.7	1352.3
152.5°	1370.7	1362.1	1378.4	1385.0	1377.3
155°	1399.1	1389.4	1402.4	1408.9	1400.3
157.5°	1421.9	1413.3	1423.1	1430.7	1421.9
160°	1441.6	1435.0	1441.6	1448.0	1440.5
162.5°	1458.9	1452.5	1457.9	1465.5	1455.7
165°	1474.2	1467.8	1471.0	1478.5	1471.0
167.5°	1486.2	1479.6	1483.0	1490.6	1480.8
170°	1496.0	1489.4	1491.7	1499.2	1489.4
172.5°	1502.5	1496.0	1498.3	1505.8	1496.0
175°	1508.0	1500.3	1502.5	1510.1	1499.2
177.5°	1510.1	1502.5	1503.7	1511.3	1501.5
180°	1504.7	1504.7	1504.7	1504.7	1504.7

TEST NUMBER: P921475

CATALOG NUMBER: DFN2DIP-4P4F0-070D050US940-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.61	10.55	10.49	11.45	12.60	9.16	10.11	10.05	11.01	12.15
	3H	11.28	12.13	12.17	13.04	14.21	10.79	11.64	11.68	12.55	13.72
	4H	11.88	12.67	12.78	13.59	14.77	11.38	12.18	12.29	13.10	14.28
	6H	12.28	13.02	13.21	13.94	15.14	11.78	12.52	12.70	13.44	14.64
	8H	12.39	13.10	13.32	14.04	15.23	11.89	12.59	12.82	13.53	14.73
	12H	12.45	13.11	13.38	14.05	15.27	11.94	12.61	12.87	13.54	14.76
4H	2H	10.08	10.88	10.99	11.80	12.98	9.73	10.52	10.64	11.44	12.62
	3H	11.96	12.63	12.88	13.58	14.77	11.55	12.22	12.48	13.17	14.36
	4H	12.68	13.29	13.62	14.23	15.46	12.26	12.87	13.19	13.81	15.03
	6H	13.21	13.73	14.16	14.70	15.92	12.77	13.30	13.72	14.27	15.49
	8H	13.36	13.85	14.31	14.81	16.05	12.92	13.41	13.88	14.38	15.61
	12H	13.44	13.88	14.41	14.86	16.10	12.99	13.43	13.96	14.41	15.65
8H	4H	12.89	13.38	13.84	14.34	15.57	12.51	13.00	13.46	13.96	15.20
	6H	13.53	13.93	14.50	14.94	16.17	13.14	13.55	14.12	14.55	15.79
	8H	13.75	14.11	14.74	15.10	16.36	13.36	13.72	14.35	14.71	15.96
	12H	13.89	14.21	14.88	15.19	16.49	13.48	13.80	14.47	14.78	16.08
12H	4H	12.88	13.32	13.85	14.30	15.54	12.51	12.95	13.48	13.93	15.17
	6H	13.56	13.92	14.54	14.91	16.16	13.19	13.55	14.17	14.54	15.79
	8H	13.81	14.12	14.80	15.11	16.41	13.43	13.74	14.42	14.73	16.03