

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P921510

Luminaire Tested: DFN2DIP-4P4F0-080D080US940-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P921510
REPORT IS A COMBINATION OF REPORTS P899149 AND P895967
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P4F0-080D080US940-FLLFLL
Description: 4 foot, 90deg - 4way Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 13375.7 lumens
Efficiency: N/A
Efficacy: 84.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 4.07' x L: 4.07' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 159.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9971
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P921510

CATALOG NUMBER: DFN2DIP-4P4F0-080D080US940-FLLFLL

Luminous Intensity Polar Plot

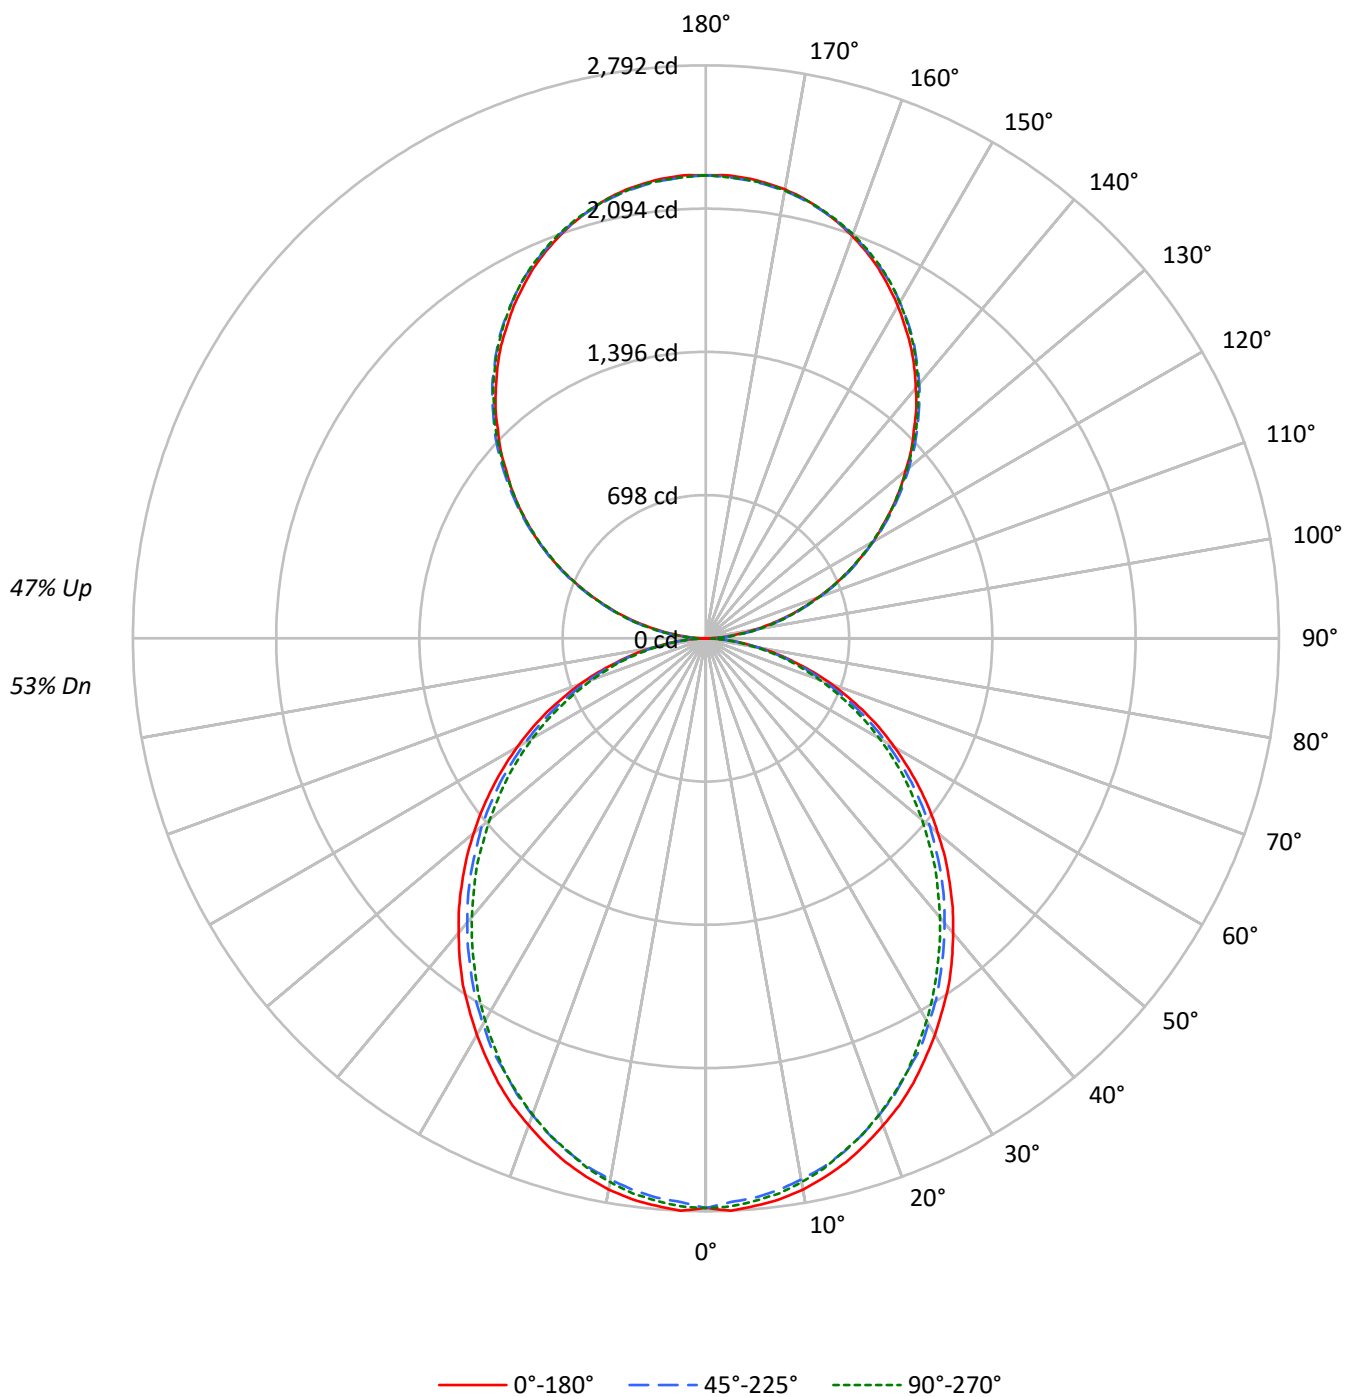

TEST NUMBER: P921510

CATALOG NUMBER: DFN2DIP-4P4F0-080D080US940-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	59	59	59
1	98	94	90	87	91	87	84	81	74	72	70	63	61	59	52	51	50
2	90	82	76	71	83	76	71	66	65	61	58	55	52	50	46	44	42
3	82	72	65	59	75	67	61	55	58	53	49	49	45	42	41	38	36
4	75	64	56	50	69	60	52	47	51	46	41	43	39	36	36	33	31
5	69	57	49	43	63	53	46	40	46	40	36	39	35	31	33	29	27
6	63	51	43	37	58	48	40	35	41	36	31	35	31	27	30	26	24
7	59	46	38	33	54	43	36	31	37	32	28	32	28	24	27	24	21
8	54	42	34	29	50	39	32	27	34	29	24	29	25	22	25	21	19
9	51	38	31	26	47	36	29	24	31	26	22	27	23	19	23	20	17
10	47	35	28	23	44	33	26	22	29	23	20	25	21	18	21	18	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1801	1801	1801
5°	1804	1776	1788
10°	1789	1753	1765
15°	1763	1725	1728
20°	1728	1685	1690
25°	1692	1638	1645
30°	1648	1594	1589
35°	1606	1542	1529
40°	1555	1489	1473
45°	1503	1436	1415
50°	1447	1381	1348
55°	1388	1317	1286
60°	1322	1241	1216
65°	1250	1163	1133
70°	1157	1068	1044
75°	1029	953	962
80°	876	808	805
85°	635	555	543

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1707 cd/sqm

TEST NUMBER: P921510

CATALOG NUMBER: DFN2DIP-4P4F0-080D080US940-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	261.3	2.0
10°-20°	735.1	5.5
20°-30°	1080.3	8.1
30°-40°	1254.7	9.4
40°-50°	1253.1	9.4
50°-60°	1092.7	8.2
60°-70°	807.7	6.0
70°-80°	457.0	3.4
80°-90°	127.0	0.9
90°-100°	139.6	1.0
100°-110°	443.6	3.3
110°-120°	759.1	5.7
120°-130°	998.3	7.5
130°-140°	1120.6	8.4
140°-150°	1098.9	8.2
150°-160°	921.8	6.9
160°-170°	611.3	4.6
170°-180°	213.7	1.6
0°-30°	2076.6	15.5
0°-40°	3331.3	24.9
0°-60°	5677.0	42.4
0°-90°	7068.8	52.8
90°-120°	1342.3	10.0
90°-150°	4560.1	34.1
90°-180°	6307.0	47.2
0°-180°	13375.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2776	2776	2776	2776	2776	
5°	2776	2765	2736	2757	2752	263
15°	2642	2626	2592	2602	2589	744
25°	2392	2370	2325	2330	2325	1100
35°	2063	2037	1994	1978	1964	1288
45°	1679	1660	1620	1591	1580	1296
55°	1271	1254	1222	1190	1177	1136
65°	857	841	814	790	777	847
75°	448	443	430	414	419	479
85°	109	107	104	96	94	122
90°	2	24	67	63	65	13
95°	99	118	122	122	118	111
105°	410	415	419	422	422	432
115°	762	773	769	767	762	753
125°	1108	1125	1120	1113	1111	990
135°	1433	1454	1458	1456	1451	1108
145°	1740	1754	1764	1766	1759	1087
155°	1990	1995	2001	2010	2004	916
165°	2164	2162	2162	2176	2166	611
175°	2252	2247	2242	2256	2244	214
180°	2256	2256	2256	2256	2256	

TEST NUMBER: P921510

CATALOG NUMBER: DFN2DIP-4P4F0-080D080US940-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2775.7	2775.7	2775.7	2775.7	2775.7
2.5°	2791.9	2778.6	2749.1	2775.7	2770.6
5°	2775.7	2765.3	2735.9	2757.1	2752.0
7.5°	2757.1	2741.2	2711.8	2733.3	2727.9
10°	2727.9	2709.2	2677.2	2698.4	2690.6
12.5°	2687.7	2671.8	2639.8	2653.1	2647.8
15°	2642.4	2626.5	2591.7	2602.5	2589.2
17.5°	2586.3	2570.4	2535.6	2549.0	2535.6
20°	2524.9	2509.0	2471.6	2479.6	2469.1
22.5°	2463.7	2439.6	2404.8	2404.8	2399.4
25°	2391.5	2370.3	2325.0	2330.0	2325.0
27.5°	2311.3	2292.7	2258.1	2250.1	2236.9
30°	2231.5	2209.9	2170.1	2162.1	2151.3
32.5°	2146.0	2130.1	2087.3	2071.2	2060.5
35°	2063.2	2036.7	1993.9	1977.7	1964.4
37.5°	1969.8	1945.7	1903.0	1884.3	1871.0
40°	1873.8	1852.3	1809.5	1785.7	1774.9
42.5°	1780.4	1758.8	1716.4	1689.4	1673.7
45°	1679.0	1660.3	1620.1	1590.9	1580.2
47.5°	1580.2	1561.5	1518.7	1489.2	1473.4
50°	1476.0	1462.7	1425.2	1387.9	1374.6
52.5°	1374.6	1355.8	1321.3	1291.9	1273.2
55°	1270.6	1254.5	1222.5	1190.5	1177.1
57.5°	1166.4	1153.2	1118.3	1086.3	1075.5
60°	1062.2	1051.8	1014.3	984.9	977.0
62.5°	960.8	942.2	915.5	888.9	878.2
65°	856.9	840.8	814.1	790.1	776.8
67.5°	750.1	736.6	712.7	694.1	683.3
70°	651.3	640.5	616.5	597.8	587.3
72.5°	549.9	539.2	525.8	507.2	499.3
75°	448.3	443.2	429.6	413.8	419.1
77.5°	357.7	346.9	341.5	333.6	325.7
80°	267.1	264.2	258.9	250.9	245.5
82.5°	181.6	181.6	179.0	168.2	168.2
85°	109.3	106.7	104.2	96.0	93.5
87.5°	48.2	42.8	37.4	29.4	26.7
90°	2.1	24.5	66.7	62.6	64.6
92.5°	42.2	57.2	59.2	61.2	61.2
95°	99.3	118.3	121.7	121.7	118.3
97.5°	165.3	183.0	190.5	190.5	190.5
100°	241.5	257.1	262.5	262.5	260.5
102.5°	321.7	333.3	340.7	342.8	340.7
105°	409.5	414.9	419.0	422.4	422.4
107.5°	496.5	504.7	504.7	506.0	496.5
110°	580.9	591.7	591.7	591.7	586.3

TEST NUMBER: P921510

CATALOG NUMBER: DFN2DIP-4P4F0-080D080US940-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	672.0	683.6	681.5	676.1	672.0
115°	761.8	772.7	769.3	767.2	761.8
117.5°	850.9	865.9	856.3	850.9	845.4
120°	940.7	955.6	940.7	940.7	934.5
122.5°	1022.3	1041.3	1031.8	1026.4	1022.3
125°	1108.0	1125.0	1119.5	1113.4	1111.4
127.5°	1191.7	1212.7	1205.2	1197.1	1191.7
130°	1269.9	1294.3	1290.9	1286.9	1279.4
132.5°	1357.6	1376.6	1378.0	1368.5	1363.1
135°	1433.1	1454.2	1458.3	1456.3	1450.8
137.5°	1517.4	1534.5	1537.8	1536.5	1528.3
140°	1591.6	1608.6	1618.1	1618.1	1610.6
142.5°	1667.8	1684.8	1690.2	1692.3	1684.8
145°	1739.9	1753.5	1764.3	1766.4	1758.9
147.5°	1804.5	1821.5	1829.6	1833.1	1825.6
150°	1871.2	1882.7	1890.2	1896.3	1890.2
152.5°	1930.3	1941.9	1951.4	1958.9	1951.4
155°	1989.5	1994.9	2001.1	2010.5	2004.5
157.5°	2040.5	2044.6	2048.0	2061.5	2052.1
160°	2086.1	2090.2	2092.2	2103.7	2095.6
162.5°	2128.2	2128.2	2130.3	2143.2	2133.7
165°	2164.3	2162.2	2162.2	2175.9	2166.3
167.5°	2196.9	2190.8	2190.8	2204.4	2194.9
170°	2221.4	2216.0	2213.9	2227.6	2216.0
172.5°	2238.5	2233.0	2231.0	2244.5	2233.0
175°	2252.0	2246.6	2242.5	2256.1	2244.5
177.5°	2259.5	2254.1	2250.0	2261.6	2250.0
180°	2256.1	2256.1	2256.1	2256.1	2256.1

TEST NUMBER: P921510

CATALOG NUMBER: DFN2DIP-4P4F0-080D080US940-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.59	10.48	10.53	11.43	12.66	9.15	10.04	10.08	10.99	12.22
	3H	11.26	12.06	12.20	13.02	14.27	10.77	11.57	11.71	12.53	13.78
	4H	11.85	12.61	12.81	13.57	14.83	11.36	12.11	12.32	13.08	14.34
	6H	12.26	12.95	13.23	13.92	15.20	11.76	12.45	12.73	13.42	14.70
	8H	12.37	13.03	13.34	14.01	15.29	11.87	12.53	12.84	13.51	14.78
	12H	12.42	13.05	13.40	14.03	15.33	11.91	12.54	12.89	13.52	14.82
4H	2H	10.06	10.81	11.02	11.78	13.04	9.70	10.46	10.67	11.42	12.68
	3H	11.93	12.56	12.91	13.55	14.83	11.52	12.15	12.50	13.15	14.42
	4H	12.65	13.23	13.64	14.21	15.51	12.23	12.80	13.21	13.79	15.09
	6H	13.17	13.67	14.17	14.68	15.98	12.74	13.24	13.74	14.25	15.55
	8H	13.33	13.79	14.32	14.79	16.11	12.89	13.35	13.89	14.36	15.67
	12H	13.41	13.82	14.42	14.84	16.16	12.96	13.37	13.97	14.39	15.71
8H	4H	12.85	13.31	13.85	14.32	15.63	12.48	12.94	13.47	13.94	15.26
	6H	13.49	13.87	14.51	14.92	16.23	13.11	13.49	14.13	14.54	15.85
	8H	13.72	14.05	14.75	15.09	16.42	13.32	13.66	14.35	14.69	16.02
	12H	13.85	14.15	14.89	15.18	16.55	13.44	13.74	14.47	14.76	16.14
12H	4H	12.84	13.26	13.85	14.28	15.60	12.47	12.89	13.49	13.91	15.23
	6H	13.52	13.86	14.55	14.89	16.22	13.15	13.49	14.18	14.52	15.85
	8H	13.77	14.07	14.80	15.09	16.47	13.39	13.69	14.42	14.71	16.09