

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P924132

Luminaire Tested: DFN2DIP-4P4F0-040D050US950-RLLFLL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P924132  
REPORT IS A COMBINATION OF REPORTS P899106 AND P895967  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-4P4F0-040D050US950-RLLFLL  
Description: 4 foot, 90deg - 4way Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7465.1 lumens  
Efficiency: N/A  
Efficacy: 94.5 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular w/ Sides (W: 4.07' x L: 4.07' x H: 0.1')  
CIE Type: General Diffuse  
  
Input Watts (W): 79  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9968  
Total Harmonic Distortion (THDi): 0.064  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P924132  
CATALOG NUMBER: DFN2DIP-4P4F0-040D050US950-RLLFLL

### Luminous Intensity Polar Plot

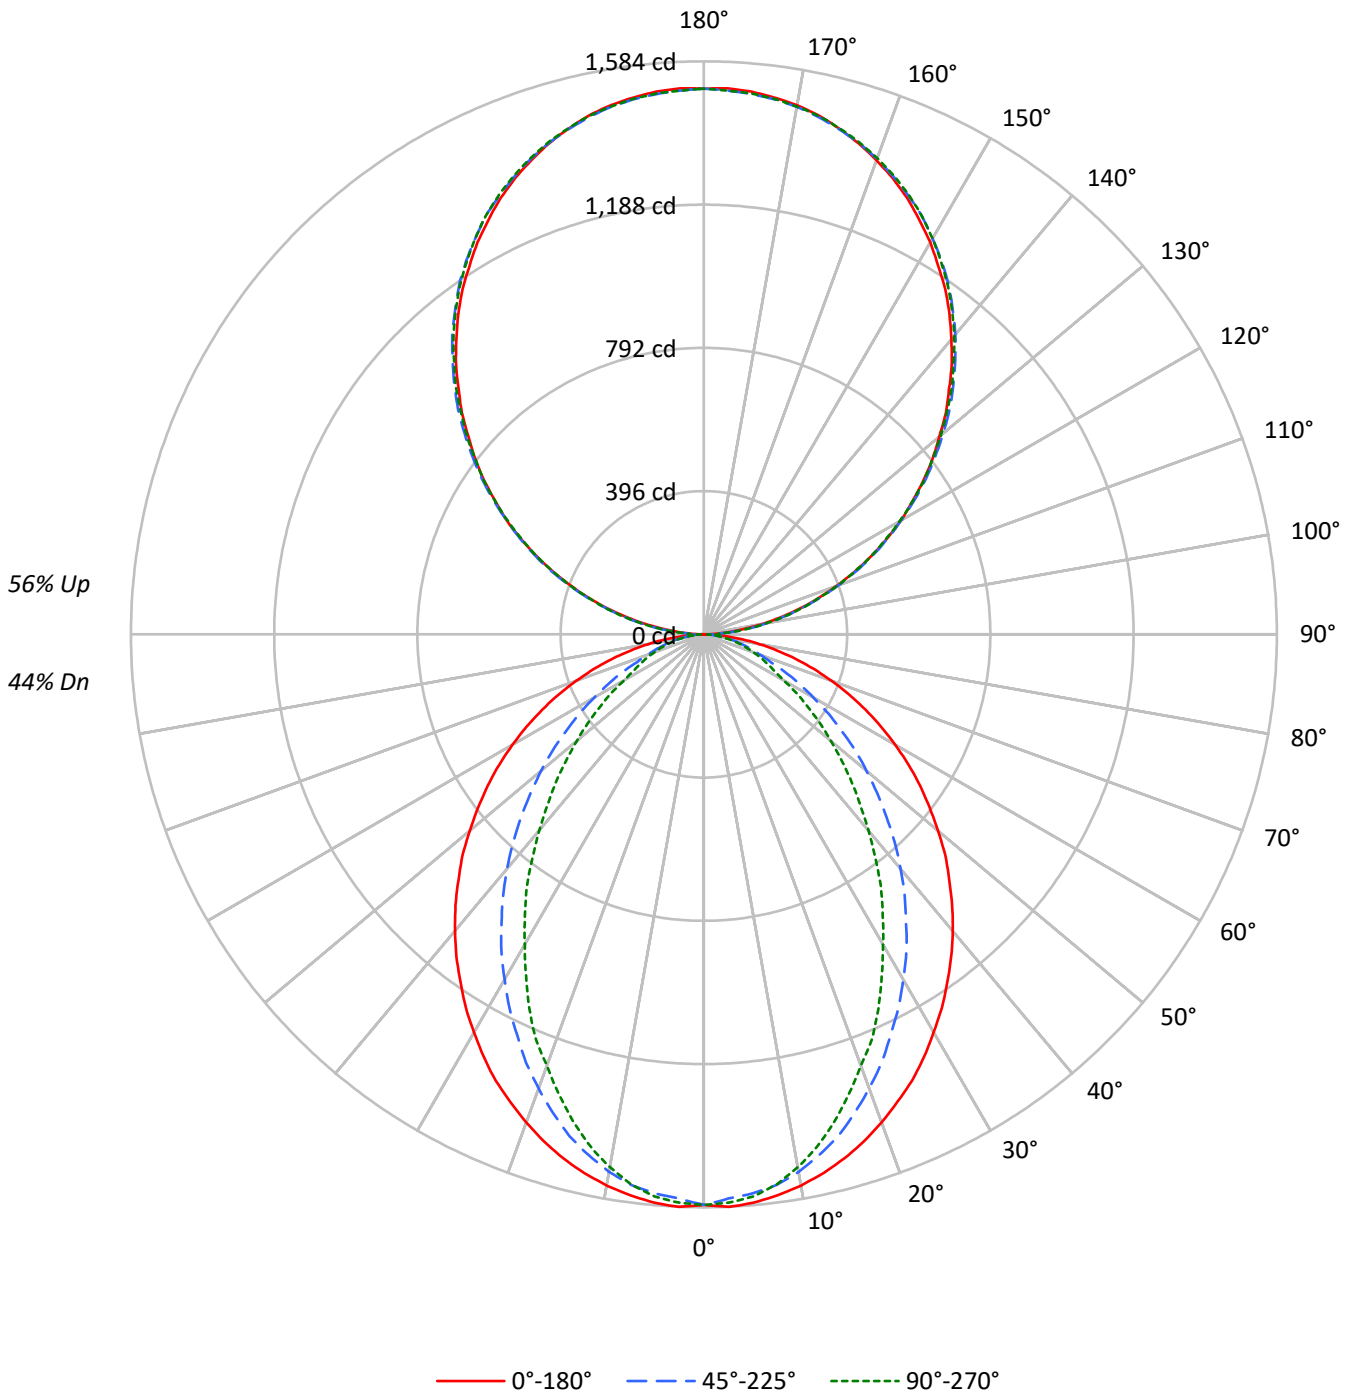



TEST NUMBER: P924132  
 CATALOG NUMBER: DFN2DIP-4P4F0-040D050US950-RLLFLL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	106	106	106	106	97	97	97	97	80	80	80	64	64	64	50	50	50	44				44
1	97	93	89	86	88	85	82	79	70	68	66	57	56	54	45	44	43	37				37
2	88	81	75	71	81	75	70	65	62	59	55	51	48	46	40	38	37	32				32
3	81	72	65	59	74	66	60	55	55	51	47	45	42	39	36	34	32	28				28
4	74	64	56	50	68	59	52	47	49	44	40	41	37	34	32	30	28	24				24
5	68	57	49	43	62	53	46	41	44	39	35	37	33	30	29	27	25	21				21
6	63	51	43	38	57	47	41	35	40	35	31	33	29	26	27	24	22	19				19
7	58	46	39	33	53	43	36	31	36	31	27	30	26	23	25	22	20	17				17
8	54	42	35	30	50	39	32	28	33	28	24	28	24	21	23	20	18	15				15
9	50	39	31	26	46	36	29	25	31	25	22	26	22	19	21	18	16	14				14
10	47	35	28	24	43	33	27	22	28	23	20	24	20	17	19	17	15	13				13

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1023	1023	1023
5°	1025	1007	1014
10°	1015	988	981
15°	1001	955	931
20°	983	911	868
25°	964	861	808
30°	938	809	732
35°	914	754	664
40°	888	696	587
45°	859	633	518
50°	829	569	449
55°	797	500	384
60°	760	428	316
65°	718	355	285
70°	667	287	259
75°	603	253	236
80°	510	214	206
85°	356	144	158

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 90°  
 Luminance: 1142 cd/sqm



TEST NUMBER: P924132

CATALOG NUMBER: DFN2DIP-4P4F0-040D050US950-RLLFLL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	147.8	2.0
10°-20°	405.8	5.4
20°-30°	569.7	7.6
30°-40°	621.0	8.3
40°-50°	570.8	7.6
50°-60°	448.2	6.0
60°-70°	291.8	3.9
70°-80°	150.2	2.0
80°-90°	42.6	0.6
90°-100°	93.4	1.3
100°-110°	296.6	4.0
110°-120°	507.6	6.8
120°-130°	667.5	8.9
130°-140°	749.3	10.0
140°-150°	734.8	9.8
150°-160°	616.4	8.3
160°-170°	408.8	5.5
170°-180°	142.9	1.9
0°-30°	1123.3	15.0
0°-40°	1744.3	23.4
0°-60°	2763.3	37.0
0°-90°	3247.9	43.5
90°-120°	897.5	12.0
90°-150°	3049.2	40.8
90°-180°	4217.0	56.5
0°-180°	7465.1	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1577	1577	1577	1577	1577	
5°	1577	1570	1551	1564	1560	150
15°	1500	1484	1436	1409	1395	423
25°	1362	1316	1222	1163	1142	626
35°	1173	1100	975	885	853	734
45°	959	864	714	612	578	741
55°	729	618	464	378	351	652
65°	492	377	248	200	196	488
75°	262	163	114	104	103	278
85°	61	31	27	27	27	70
90°	1	16	45	42	43	7
95°	66	79	81	81	79	74
105°	274	277	280	282	282	289
115°	509	517	514	513	509	504
125°	741	752	749	744	743	662
135°	958	972	975	974	970	741
145°	1163	1172	1180	1181	1176	727
155°	1330	1334	1338	1344	1340	612
165°	1447	1446	1446	1455	1449	408
175°	1506	1502	1500	1509	1501	143
180°	1509	1509	1509	1509	1509	



TEST NUMBER: P924132

CATALOG NUMBER: DFN2DIP-4P4F0-040D050US950-RLLFLL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1577.2	1577.2	1577.2	1577.2	1577.2
2.5°	1584.3	1577.2	1561.4	1575.8	1572.9
5°	1577.2	1570.0	1551.4	1564.3	1560.1
7.5°	1564.3	1555.8	1535.8	1541.4	1534.3
10°	1547.2	1537.2	1508.7	1504.3	1495.9
12.5°	1525.8	1512.9	1474.3	1465.8	1450.1
15°	1500.1	1484.3	1435.9	1408.8	1394.6
17.5°	1470.1	1447.2	1387.2	1355.9	1333.0
20°	1435.9	1407.2	1335.9	1300.3	1268.8
22.5°	1398.8	1365.9	1283.0	1234.6	1213.3
25°	1361.6	1315.9	1221.7	1163.3	1141.7
27.5°	1317.5	1268.8	1164.6	1097.6	1064.7
30°	1270.3	1216.0	1101.8	1029.1	990.5
32.5°	1224.6	1158.9	1042.0	956.3	920.5
35°	1173.3	1100.4	974.9	884.9	853.4
37.5°	1123.3	1044.7	912.0	813.5	777.9
40°	1070.5	984.9	846.4	745.1	708.0
42.5°	1016.2	924.9	780.8	675.1	639.5
45°	959.2	863.5	713.7	612.3	578.0
47.5°	905.0	803.6	649.5	548.1	516.7
50°	845.0	743.6	586.6	488.1	458.2
52.5°	786.4	679.3	526.7	432.4	405.4
55°	729.3	618.0	463.8	378.3	351.2
57.5°	670.9	556.7	408.2	328.3	305.5
60°	610.8	496.7	349.6	276.9	254.1
62.5°	552.5	438.3	299.7	231.2	219.9
65°	492.5	376.7	248.3	199.9	195.5
67.5°	435.4	319.7	199.9	175.5	171.2
70°	375.4	264.1	165.5	151.3	145.5
72.5°	318.3	212.6	138.4	127.1	124.2
75°	262.5	162.7	114.2	104.2	102.8
77.5°	207.0	115.5	90.0	84.2	81.3
80°	155.5	82.8	68.4	62.9	62.9
82.5°	108.5	55.7	47.1	44.2	44.2
85°	61.3	31.4	27.1	27.1	27.1
87.5°	22.9	11.4	11.4	10.0	10.0
90°	1.3	16.4	44.6	41.9	43.2
92.5°	28.2	38.2	39.6	40.9	40.9
95°	66.4	79.2	81.4	81.4	79.2
97.5°	110.5	122.3	127.4	127.4	127.4
100°	161.4	171.9	175.5	175.5	174.2
102.5°	215.1	222.9	227.8	229.2	227.8
105°	273.8	277.4	280.2	282.4	282.4
107.5°	332.0	337.4	337.4	338.4	332.0
110°	388.4	395.7	395.7	395.7	392.0



TEST NUMBER: P924132

CATALOG NUMBER: DFN2DIP-4P4F0-040D050US950-RLLFLL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	449.3	457.1	455.7	452.1	449.3
115°	509.3	516.7	514.4	513.1	509.3
117.5°	569.0	579.0	572.6	569.0	565.3
120°	629.0	639.0	629.0	629.0	624.9
122.5°	683.5	696.3	689.9	686.3	683.5
125°	740.9	752.2	748.6	744.5	743.2
127.5°	796.8	810.9	805.9	800.4	796.8
130°	849.2	865.5	863.2	860.5	855.5
132.5°	907.8	920.5	921.5	915.1	911.5
135°	958.3	972.3	975.1	973.7	970.1
137.5°	1014.7	1026.0	1028.3	1027.4	1021.9
140°	1064.2	1075.6	1081.9	1081.9	1077.0
142.5°	1115.1	1126.6	1130.2	1131.5	1126.6
145°	1163.4	1172.5	1179.7	1181.1	1176.1
147.5°	1206.6	1218.0	1223.4	1225.7	1220.6
150°	1251.2	1258.9	1263.9	1268.0	1263.9
152.5°	1290.8	1298.5	1304.8	1309.8	1304.8
155°	1330.3	1333.9	1338.0	1344.4	1340.3
157.5°	1364.4	1367.1	1369.4	1378.5	1372.1
160°	1394.8	1397.6	1398.9	1406.7	1401.2
162.5°	1423.1	1423.1	1424.4	1433.1	1426.7
165°	1447.2	1445.8	1445.8	1454.9	1448.6
167.5°	1469.0	1464.9	1464.9	1474.0	1467.6
170°	1485.4	1481.8	1480.4	1489.5	1481.8
172.5°	1496.7	1493.1	1491.8	1500.8	1493.1
175°	1505.9	1502.2	1499.5	1508.6	1500.8
177.5°	1510.8	1507.2	1504.5	1512.2	1504.5
180°	1508.6	1508.6	1508.6	1508.6	1508.6



TEST NUMBER: P924132  
 CATALOG NUMBER: DFN2DIP-4P4F0-040D050US950-RLLFLL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.61	7.39	7.62	8.41	9.77	2.57	3.35	3.58	4.37	5.73
	3H	8.29	8.98	9.31	10.01	11.40	3.75	4.45	4.78	5.48	6.86
	4H	8.90	9.56	9.94	10.59	11.98	4.20	4.86	5.24	5.90	7.29
	6H	9.32	9.93	10.37	10.96	12.37	4.52	5.13	5.57	6.17	7.57
	8H	9.45	10.02	10.50	11.08	12.48	4.61	5.19	5.67	6.24	7.64
	12H	9.51	10.06	10.57	11.11	12.53	4.65	5.20	5.71	6.25	7.67
4H	2H	6.62	7.28	7.66	8.31	9.70	3.16	3.82	4.20	4.85	6.24
	3H	8.45	9.00	9.50	10.06	11.46	4.51	5.06	5.56	6.12	7.52
	4H	9.14	9.65	10.20	10.70	12.13	5.05	5.56	6.11	6.61	8.04
	6H	9.66	10.09	10.73	11.17	12.59	5.47	5.90	6.54	6.98	8.40
	8H	9.84	10.24	10.91	11.31	12.75	5.60	6.00	6.67	7.07	8.51
	12H	9.94	10.30	11.02	11.38	12.82	5.67	6.03	6.75	7.11	8.55
8H	4H	9.11	9.51	10.18	10.58	12.02	5.33	5.74	6.40	6.80	8.24
	6H	9.68	10.01	10.77	11.12	12.55	5.85	6.19	6.95	7.30	8.73
	8H	9.90	10.19	11.00	11.28	12.74	6.05	6.34	7.15	7.43	8.88
	12H	10.04	10.30	11.14	11.38	12.88	6.16	6.42	7.27	7.51	9.00
12H	4H	9.06	9.42	10.15	10.50	11.95	5.34	5.70	6.42	6.78	8.22
	6H	9.65	9.95	10.75	11.04	12.49	5.90	6.20	7.00	7.29	8.74
	8H	9.88	10.13	10.98	11.22	12.71	6.11	6.37	7.22	7.46	8.95