

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P924138

Luminaire Tested: DFN2DIP-4P4F0-040D070US950-FLLFLL

Issue Date: 11/21/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P924138  
REPORT IS A COMBINATION OF REPORTS P899129 AND P895967  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-4P4F0-040D070US950-FLLFLL  
Description: 4 foot, 90deg - 4way Define Geo, with Direct Frosted Lens, Indirect Frosted Lens  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 9687.9 lumens  
Efficiency: N/A  
Efficacy: 97.0 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29  
Luminous Opening: Rectangular w/ Sides (W: 4.07' x L: 4.07' x H: 0.1')  
CIE Type: Semi-Indirect

Input Watts (W): 99.9  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9968  
Total Harmonic Distortion (THDi): 0.064  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P924138  
CATALOG NUMBER: DFN2DIP-4P4F0-040D070US950-FLLFL

### Luminous Intensity Polar Plot

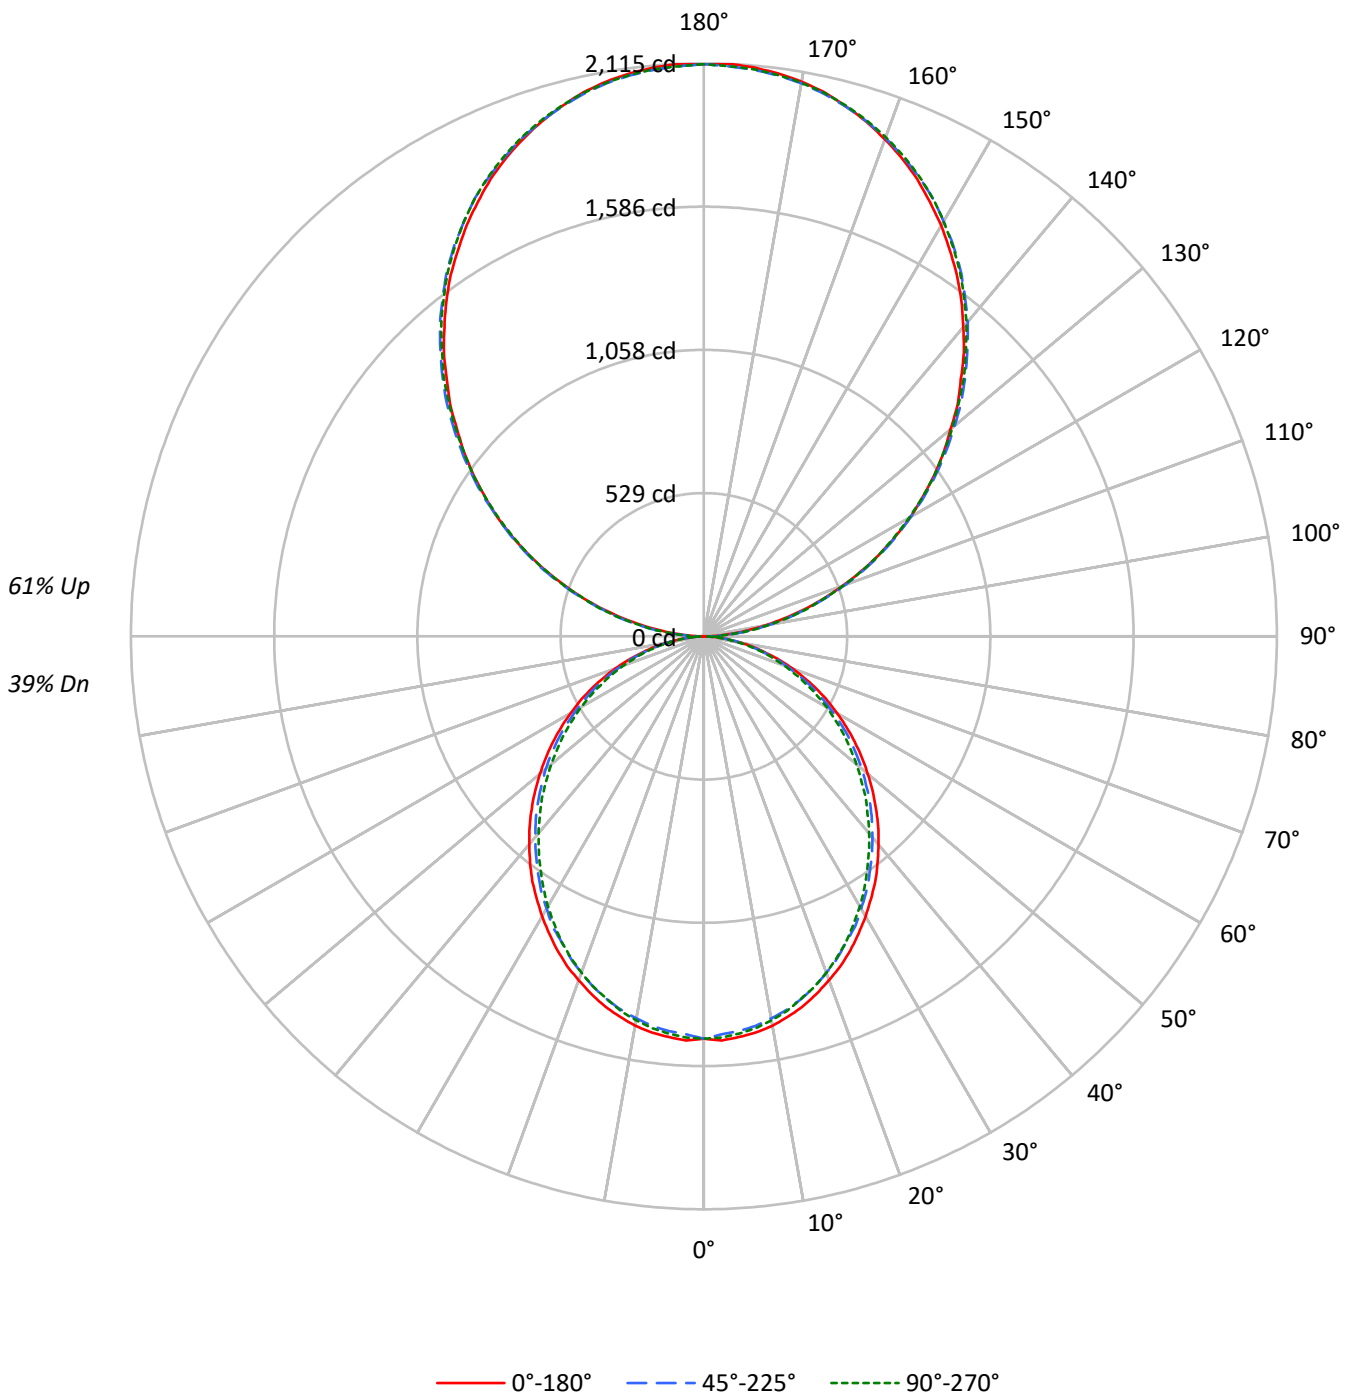



TEST NUMBER: P924138  
 CATALOG NUMBER: DFN2DIP-4P4F0-040D070US950-FLLFLL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	105	105	105	105	95	95	95	95	77	77	77	61	61	61	46	46	46	39				39
1	95	91	87	84	86	83	80	77	68	65	63	54	52	51	41	40	39	33				33
2	87	79	73	68	79	72	67	63	59	56	52	47	45	42	36	34	33	28				28
3	79	70	63	57	72	64	58	53	52	48	44	42	38	36	32	30	28	23				23
4	72	62	54	48	65	56	50	44	46	41	37	37	33	31	28	26	24	20				20
5	66	55	47	41	60	50	43	38	41	36	32	33	29	27	26	23	21	17				17
6	61	49	41	36	55	45	38	33	37	32	28	30	26	23	23	20	18	15				15
7	56	44	37	31	51	41	34	29	34	28	25	27	23	20	21	18	16	14				14
8	52	40	33	27	47	37	30	26	31	26	22	25	21	18	19	17	15	12				12
9	49	37	29	24	44	34	27	23	28	23	19	23	19	16	18	15	13	11				11
10	45	34	26	22	41	31	25	20	26	21	18	21	17	15	17	14	12	10				10

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	963	963	963
5°	965	950	957
10°	957	938	944
15°	943	923	924
20°	924	901	904
25°	905	876	880
30°	882	852	850
35°	859	825	818
40°	832	796	788
45°	804	768	757
50°	774	739	721
55°	743	705	688
60°	707	664	650
65°	668	622	606
70°	619	571	558
75°	551	510	515
80°	468	432	431
85°	340	297	291

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 90°  
 Luminance: 1599 cd/sqm



TEST NUMBER: P924138

CATALOG NUMBER: DFN2DIP-4P4F0-040D070US950-FLLFLL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	139.8	1.4
10°-20°	393.2	4.1
20°-30°	577.9	6.0
30°-40°	671.2	6.9
40°-50°	670.3	6.9
50°-60°	584.5	6.0
60°-70°	432.1	4.5
70°-80°	244.5	2.5
80°-90°	70.5	0.7
90°-100°	130.7	1.3
100°-110°	415.3	4.3
110°-120°	710.6	7.3
120°-130°	934.6	9.6
130°-140°	1049.0	10.8
140°-150°	1028.7	10.6
150°-160°	862.9	8.9
160°-170°	572.3	5.9
170°-180°	200.0	2.1
0°-30°	1110.8	11.5
0°-40°	1782.0	18.4
0°-60°	3036.8	31.3
0°-90°	3783.8	39.1
90°-120°	1256.6	13.0
90°-150°	4268.9	44.1
90°-180°	5904.0	60.9
0°-180°	9687.9	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1485	1485	1485	1485	1485	
5°	1485	1479	1463	1475	1472	141
15°	1413	1405	1386	1392	1385	398
25°	1279	1268	1244	1246	1244	589
35°	1104	1090	1067	1058	1051	689
45°	898	888	867	851	845	693
55°	680	671	654	637	630	608
65°	458	450	436	423	416	453
75°	240	237	230	221	224	256
85°	58	57	56	51	50	65
90°	2	23	62	59	60	9
95°	93	111	114	114	111	103
105°	383	388	392	395	395	405
115°	713	723	720	718	713	705
125°	1037	1053	1048	1042	1040	927
135°	1342	1361	1365	1363	1358	1037
145°	1629	1642	1652	1654	1647	1018
155°	1862	1868	1873	1882	1876	857
165°	2026	2024	2024	2037	2028	572
175°	2108	2103	2099	2112	2101	200
180°	2112	2112	2112	2112	2112	



TEST NUMBER: P924138

CATALOG NUMBER: DFN2DIP-4P4F0-040D070US950-FLLFL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1484.8	1484.8	1484.8	1484.8	1484.8
2.5°	1493.5	1486.3	1470.6	1484.8	1482.1
5°	1484.8	1479.2	1463.4	1474.8	1472.1
7.5°	1474.8	1466.3	1450.6	1462.1	1459.2
10°	1459.2	1449.2	1432.1	1443.5	1439.2
12.5°	1437.7	1429.2	1412.1	1419.3	1416.3
15°	1413.4	1405.0	1386.4	1392.1	1385.0
17.5°	1383.5	1375.0	1356.4	1363.5	1356.4
20°	1350.6	1342.1	1322.1	1326.3	1320.8
22.5°	1317.9	1305.0	1286.4	1286.4	1283.5
25°	1279.2	1267.9	1243.6	1246.4	1243.6
27.5°	1236.4	1226.4	1208.0	1203.7	1196.6
30°	1193.6	1182.2	1160.8	1156.5	1150.8
32.5°	1147.9	1139.5	1116.6	1108.0	1102.2
35°	1103.7	1089.5	1066.6	1058.0	1050.8
37.5°	1053.7	1040.8	1017.9	1008.0	1000.8
40°	1002.4	990.8	967.9	955.2	949.5
42.5°	952.4	940.8	918.1	903.7	895.2
45°	898.1	888.2	866.6	851.1	845.2
47.5°	845.2	835.2	812.4	796.7	788.2
50°	789.5	782.4	762.4	742.4	735.2
52.5°	735.2	725.3	706.8	691.1	681.1
55°	679.7	671.0	654.0	636.8	629.7
57.5°	623.9	616.9	598.2	581.1	575.4
60°	568.2	562.6	542.6	526.9	522.6
62.5°	514.0	504.0	489.8	475.5	469.7
65°	458.4	449.7	435.5	422.6	415.6
67.5°	401.3	394.0	381.3	371.3	365.6
70°	348.4	342.7	329.8	319.8	314.2
72.5°	294.2	288.4	281.3	271.3	267.0
75°	239.8	237.1	229.8	221.3	224.2
77.5°	191.3	185.6	182.7	178.4	174.2
80°	142.8	141.3	138.4	134.2	131.4
82.5°	97.1	97.1	95.8	90.0	90.0
85°	58.5	57.1	55.7	51.3	50.0
87.5°	25.8	22.9	20.0	15.7	14.2
90°	1.9	22.9	62.4	58.6	60.5
92.5°	39.5	53.5	55.4	57.3	57.3
95°	92.9	110.8	114.0	114.0	110.8
97.5°	154.7	171.2	178.3	178.3	178.3
100°	226.0	240.7	245.8	245.8	243.8
102.5°	301.2	312.0	319.0	320.9	319.0
105°	383.3	388.4	392.2	395.4	395.4
107.5°	464.8	472.4	472.4	473.8	464.8
110°	543.8	554.0	554.0	554.0	548.8



TEST NUMBER: P924138

CATALOG NUMBER: DFN2DIP-4P4F0-040D070US950-FLLFLL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	629.1	639.9	638.0	632.9	629.1
115°	713.1	723.3	720.2	718.3	713.1
117.5°	796.5	810.5	801.6	796.5	791.4
120°	880.5	894.6	880.5	880.5	874.8
122.5°	957.0	974.8	965.9	960.8	957.0
125°	1037.2	1053.1	1048.1	1042.3	1040.4
127.5°	1115.5	1135.3	1128.3	1120.7	1115.5
130°	1188.8	1211.7	1208.5	1204.7	1197.7
132.5°	1270.9	1288.8	1290.0	1281.1	1276.0
135°	1341.6	1361.3	1365.2	1363.2	1358.1
137.5°	1420.5	1436.4	1439.6	1438.3	1430.7
140°	1490.0	1505.9	1514.8	1514.8	1507.8
142.5°	1561.2	1577.2	1582.2	1584.1	1577.2
145°	1628.8	1641.5	1651.7	1653.6	1646.6
147.5°	1689.2	1705.2	1712.8	1716.0	1709.0
150°	1751.6	1762.4	1769.5	1775.2	1769.5
152.5°	1807.0	1817.8	1826.7	1833.8	1826.7
155°	1862.4	1867.5	1873.3	1882.1	1876.4
157.5°	1910.2	1914.0	1917.2	1929.9	1921.0
160°	1952.8	1956.7	1958.6	1969.3	1961.7
162.5°	1992.3	1992.3	1994.2	2006.3	1997.4
165°	2026.0	2024.1	2024.1	2036.9	2027.9
167.5°	2056.6	2050.9	2050.9	2063.6	2054.7
170°	2079.5	2074.5	2072.6	2085.3	2074.5
172.5°	2095.5	2090.3	2088.4	2101.2	2090.3
175°	2108.1	2103.1	2099.3	2112.0	2101.2
177.5°	2115.2	2110.1	2106.2	2117.1	2106.2
180°	2112.0	2112.0	2112.0	2112.0	2112.0



TEST NUMBER: P924138  
 CATALOG NUMBER: DFN2DIP-4P4F0-040D070US950-FLLFL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.05	6.83	7.10	7.88	9.30	5.61	6.38	6.66	7.43	8.85
	3H	7.71	8.40	8.77	9.46	10.90	7.22	7.91	8.28	8.97	10.41
	4H	8.30	8.96	9.37	10.02	11.46	7.81	8.46	8.87	9.52	10.97
	6H	8.70	9.30	9.78	10.37	11.83	8.20	8.80	9.28	9.87	11.33
	8H	8.80	9.38	9.89	10.46	11.91	8.30	8.88	9.38	9.96	11.41
	12H	8.85	9.40	9.94	10.47	11.95	8.34	8.89	9.43	9.96	11.44
4H	2H	6.51	7.16	7.58	8.22	9.67	6.15	6.81	7.22	7.87	9.31
	3H	8.37	8.92	9.45	10.00	11.46	7.96	8.51	9.04	9.60	11.06
	4H	9.08	9.59	10.17	10.67	12.14	8.66	9.16	9.75	10.24	11.72
	6H	9.60	10.03	10.69	11.13	12.61	9.17	9.60	10.26	10.70	12.17
	8H	9.75	10.15	10.84	11.25	12.74	9.31	9.71	10.41	10.81	12.30
	12H	9.82	10.19	10.93	11.29	12.79	9.37	9.74	10.48	10.84	12.34
8H	4H	9.27	9.68	10.37	10.77	12.26	8.90	9.30	9.99	10.39	11.88
	6H	9.91	10.24	11.03	11.38	12.86	9.52	9.86	10.64	10.99	12.48
	8H	10.13	10.42	11.26	11.54	13.05	9.74	10.03	10.86	11.15	12.65
	12H	10.26	10.52	11.39	11.63	13.18	9.85	10.11	10.98	11.22	12.77
12H	4H	9.26	9.62	10.37	10.73	12.22	8.89	9.25	10.00	10.36	11.85
	6H	9.94	10.23	11.06	11.35	12.85	9.57	9.86	10.69	10.98	12.48
	8H	10.18	10.44	11.31	11.55	13.09	9.80	10.06	10.93	11.17	12.71