

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P924182

Luminaire Tested: DFN2DIP-4P4F0-060D060US950-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P924182
REPORT IS A COMBINATION OF REPORTS P899121 AND P895967
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-4P4F0-060D060US950-FLLFLL
Description: 4 foot, 90deg - 4way Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 10732.5 lumens
Efficiency: N/A
Efficacy: 96.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 4.07' x L: 4.07' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 111.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P924182

CATALOG NUMBER: DFN2DIP-4P4F0-060D060US950-FLLFLL

Luminous Intensity Polar Plot

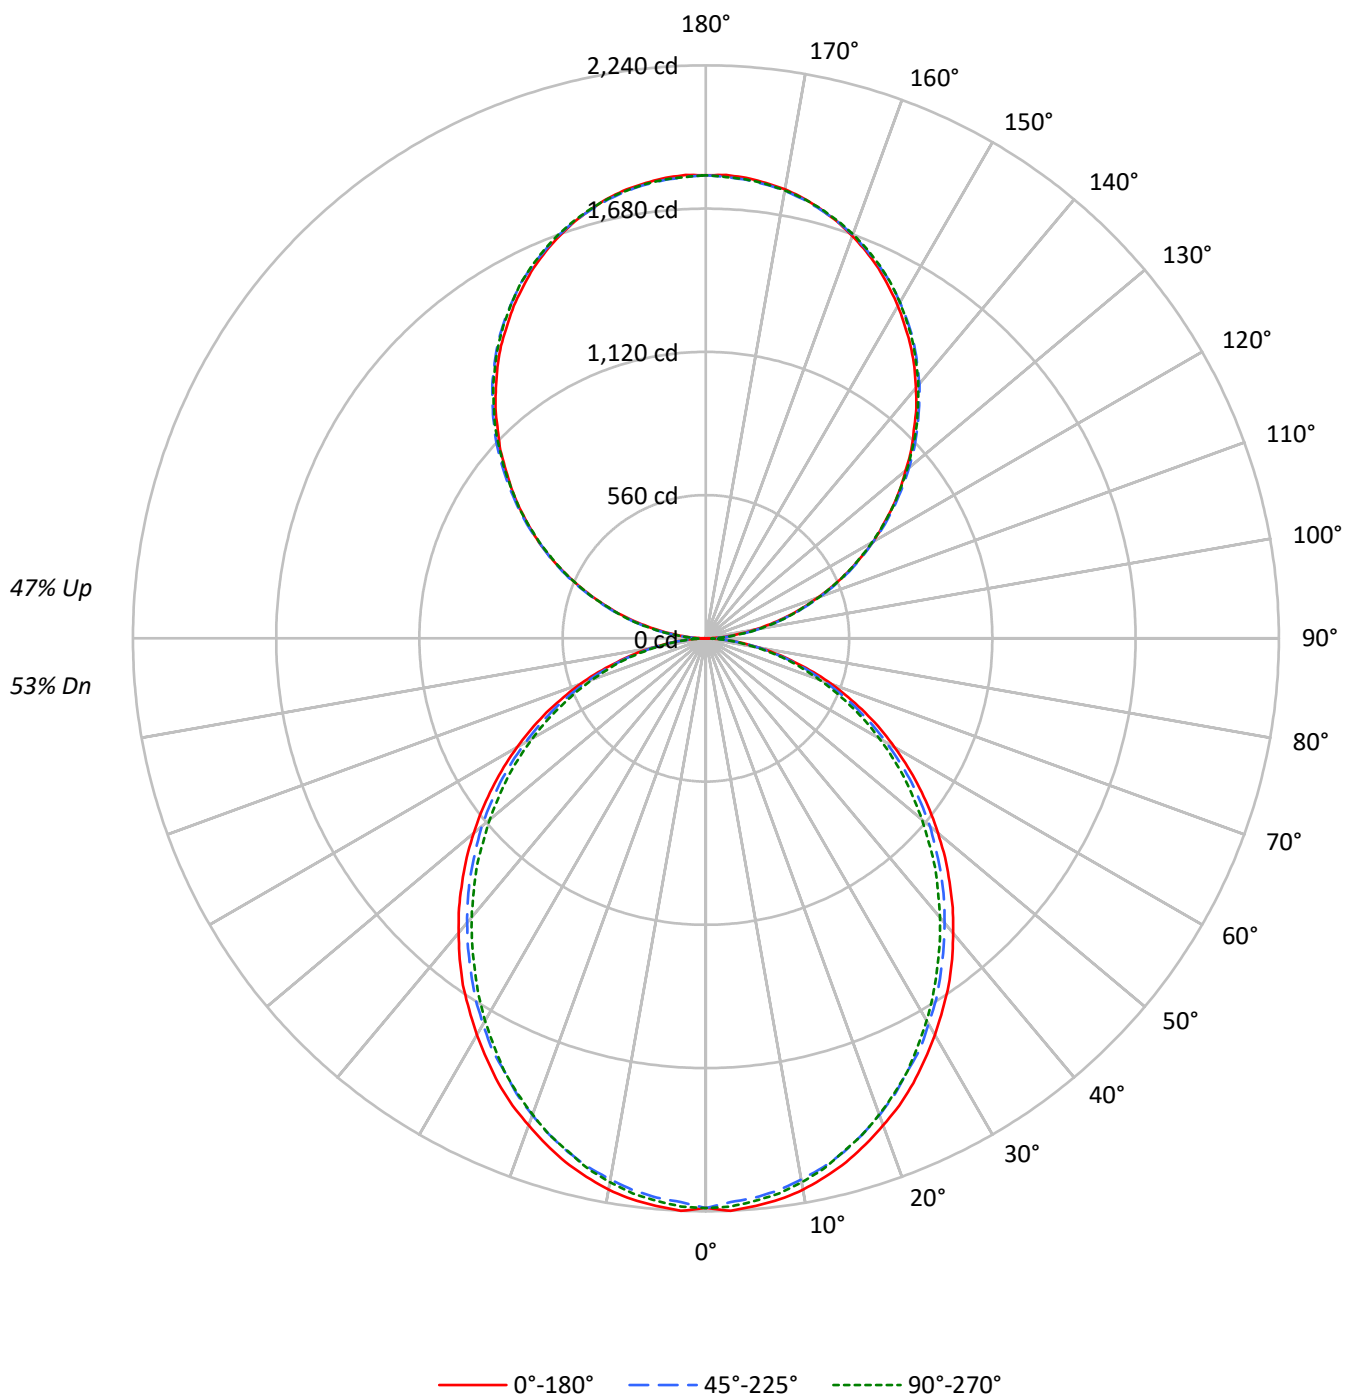

TEST NUMBER: P924182

CATALOG NUMBER: DFN2DIP-4P4F0-060D060US950-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	59	59	59
1	98	94	90	87	91	87	84	81	74	72	70	63	61	59	52	51	50
2	90	82	76	71	83	76	71	66	65	61	58	55	52	50	46	44	42
3	82	72	65	59	75	67	61	55	58	53	49	49	45	42	41	38	36
4	75	64	56	50	69	60	52	47	51	46	41	43	39	36	36	33	31
5	69	57	49	43	63	53	46	40	46	40	36	39	35	31	33	29	27
6	63	51	43	37	58	48	40	35	41	36	31	35	31	27	30	26	24
7	59	46	38	33	54	43	36	31	37	32	28	32	28	24	27	24	21
8	54	42	34	29	50	39	32	27	34	29	24	29	25	22	25	21	19
9	51	38	31	26	47	36	29	24	31	26	22	27	23	19	23	20	17
10	47	35	28	23	44	33	26	22	29	23	20	25	21	18	21	18	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1445	1445	1445
5°	1447	1425	1435
10°	1436	1406	1416
15°	1415	1384	1386
20°	1386	1352	1356
25°	1358	1314	1320
30°	1323	1279	1275
35°	1289	1237	1227
40°	1248	1195	1182
45°	1206	1153	1135
50°	1161	1108	1081
55°	1114	1057	1032
60°	1061	996	976
65°	1003	933	909
70°	929	856	837
75°	826	765	772
80°	703	648	646
85°	510	445	436

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1369 cd/sqm

TEST NUMBER: P924182

CATALOG NUMBER: DFN2DIP-4P4F0-060D060US950-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	209.6	2.0
10°-20°	589.8	5.5
20°-30°	866.8	8.1
30°-40°	1006.7	9.4
40°-50°	1005.5	9.4
50°-60°	876.7	8.2
60°-70°	648.1	6.0
70°-80°	366.7	3.4
80°-90°	101.9	0.9
90°-100°	112.0	1.0
100°-110°	355.9	3.3
110°-120°	609.1	5.7
120°-130°	801.1	7.5
130°-140°	899.2	8.4
140°-150°	881.7	8.2
150°-160°	739.6	6.9
160°-170°	490.5	4.6
170°-180°	171.4	1.6
0°-30°	1666.2	15.5
0°-40°	2673.0	24.9
0°-60°	4555.2	42.4
0°-90°	5671.9	52.8
90°-120°	1077.0	10.0
90°-150°	3659.0	34.1
90°-180°	5061.0	47.2
0°-180°	10732.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2227	2227	2227	2227	2227	
5°	2227	2219	2195	2212	2208	211
15°	2120	2108	2080	2088	2078	597
25°	1919	1902	1866	1870	1866	883
35°	1656	1634	1600	1587	1576	1034
45°	1347	1332	1300	1276	1268	1040
55°	1020	1007	981	955	945	912
65°	688	675	653	634	623	680
75°	360	356	345	332	336	384
85°	88	86	84	77	75	98
90°	2	20	54	50	52	10
95°	80	95	98	98	95	89
105°	329	333	336	339	339	347
115°	611	620	617	616	611	605
125°	889	903	898	893	892	794
135°	1150	1167	1170	1168	1164	889
145°	1396	1407	1416	1417	1411	872
155°	1596	1601	1606	1613	1608	735
165°	1737	1735	1735	1746	1738	490
175°	1807	1803	1799	1810	1801	172
180°	1810	1810	1810	1810	1810	

TEST NUMBER: P924182

CATALOG NUMBER: DFN2DIP-4P4F0-060D060US950-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2227.2	2227.2	2227.2	2227.2	2227.2
2.5°	2240.2	2229.5	2205.8	2227.2	2223.1
5°	2227.2	2218.8	2195.2	2212.2	2208.1
7.5°	2212.2	2199.5	2175.9	2193.2	2188.9
10°	2188.9	2173.9	2148.1	2165.2	2158.8
12.5°	2156.6	2143.8	2118.2	2128.9	2124.6
15°	2120.2	2107.5	2079.5	2088.2	2077.5
17.5°	2075.2	2062.5	2034.6	2045.2	2034.6
20°	2025.9	2013.2	1983.2	1989.6	1981.2
22.5°	1976.9	1957.5	1929.6	1929.6	1925.3
25°	1918.9	1901.9	1865.5	1869.6	1865.5
27.5°	1854.6	1839.6	1811.8	1805.5	1794.9
30°	1790.6	1773.2	1741.2	1734.8	1726.2
32.5°	1721.9	1709.2	1674.8	1661.9	1653.3
35°	1655.6	1634.2	1599.9	1586.9	1576.2
37.5°	1580.6	1561.2	1527.0	1511.9	1501.2
40°	1503.5	1486.2	1452.0	1432.9	1424.2
42.5°	1428.5	1411.3	1377.2	1355.6	1342.9
45°	1347.2	1332.2	1299.9	1276.5	1267.9
47.5°	1267.9	1252.9	1218.6	1195.0	1182.2
50°	1184.3	1173.6	1143.7	1113.6	1102.9
52.5°	1102.9	1087.9	1060.2	1036.6	1021.6
55°	1019.5	1006.6	980.9	955.2	944.6
57.5°	936.0	925.3	897.3	871.7	863.0
60°	852.3	843.9	814.0	790.3	783.9
62.5°	770.9	755.9	734.6	713.2	704.6
65°	687.5	674.7	653.3	633.9	623.2
67.5°	601.9	591.0	571.9	556.9	548.3
70°	522.6	514.0	494.6	479.7	471.3
72.5°	441.2	432.6	422.0	407.0	400.6
75°	359.7	355.7	344.7	332.0	336.3
77.5°	287.0	278.4	274.0	267.7	261.3
80°	214.3	212.0	207.7	201.3	197.0
82.5°	145.7	145.7	143.6	135.0	135.0
85°	87.7	85.7	83.6	77.0	75.0
87.5°	38.6	34.3	30.0	23.7	21.4
90°	1.6	19.7	53.5	50.2	51.8
92.5°	33.9	45.9	47.5	49.1	49.1
95°	79.7	94.9	97.7	97.7	94.9
97.5°	132.6	146.8	152.8	152.8	152.8
100°	193.8	206.3	210.6	210.6	209.0
102.5°	258.2	267.4	273.4	275.0	273.4
105°	328.6	332.9	336.2	339.0	339.0
107.5°	398.4	405.0	405.0	406.0	398.4
110°	466.1	474.8	474.8	474.8	470.4



TEST NUMBER: P924182

CATALOG NUMBER: DFN2DIP-4P4F0-060D060US950-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	539.2	548.5	546.8	542.4	539.2
115°	611.2	620.0	617.2	615.6	611.2
117.5°	682.8	694.8	687.1	682.8	678.4
120°	754.8	766.8	754.8	754.8	749.8
122.5°	820.2	835.5	827.9	823.6	820.2
125°	889.0	902.7	898.3	893.4	891.8
127.5°	956.2	973.1	967.1	960.6	956.2
130°	1019.0	1038.6	1035.9	1032.6	1026.6
132.5°	1089.4	1104.6	1105.7	1098.1	1093.7
135°	1150.0	1166.8	1170.1	1168.5	1164.1
137.5°	1217.6	1231.2	1234.0	1232.9	1226.4
140°	1277.1	1290.8	1298.4	1298.4	1292.4
142.5°	1338.2	1351.8	1356.2	1357.8	1351.8
145°	1396.1	1407.0	1415.7	1417.4	1411.3
147.5°	1447.9	1461.5	1468.1	1470.8	1464.8
150°	1501.4	1510.7	1516.7	1521.5	1516.7
152.5°	1548.8	1558.2	1565.8	1571.8	1565.8
155°	1596.3	1600.7	1605.6	1613.3	1608.3
157.5°	1637.3	1640.6	1643.3	1654.2	1646.6
160°	1673.9	1677.1	1678.8	1688.0	1681.5
162.5°	1707.7	1707.7	1709.3	1719.7	1712.0
165°	1736.6	1734.9	1734.9	1745.9	1738.3
167.5°	1762.8	1757.9	1757.9	1768.8	1761.2
170°	1782.5	1778.1	1776.4	1787.3	1778.1
172.5°	1796.1	1791.7	1790.1	1801.0	1791.7
175°	1807.0	1802.7	1799.3	1810.3	1801.0
177.5°	1813.0	1808.7	1805.3	1814.6	1805.3
180°	1810.3	1810.3	1810.3	1810.3	1810.3

TEST NUMBER: P924182

CATALOG NUMBER: DFN2DIP-4P4F0-060D060US950-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.83	9.72	9.76	10.67	11.90	8.38	9.27	9.32	10.22	11.45
	3H	10.50	11.29	11.44	12.25	13.50	10.01	10.80	10.95	11.76	13.01
	4H	11.09	11.84	12.05	12.81	14.07	10.59	11.35	11.55	12.31	13.57
	6H	11.49	12.19	12.46	13.16	14.43	10.99	11.69	11.96	12.66	13.93
	8H	11.60	12.26	12.58	13.25	14.52	11.10	11.76	12.08	12.75	14.02
	12H	11.65	12.28	12.64	13.26	14.56	11.14	11.77	12.13	12.75	14.05
4H	2H	9.29	10.05	10.26	11.01	12.27	8.94	9.69	9.90	10.66	11.92
	3H	11.17	11.80	12.14	12.79	14.07	10.76	11.39	11.73	12.38	13.66
	4H	11.89	12.46	12.87	13.45	14.75	11.46	12.04	12.45	13.03	14.33
	6H	12.41	12.91	13.40	13.92	15.21	11.98	12.47	12.97	13.48	14.78
	8H	12.56	13.03	13.56	14.03	15.34	12.13	12.59	13.12	13.59	14.91
	12H	12.64	13.06	13.66	14.08	15.40	12.19	12.61	13.21	13.63	14.95
8H	4H	12.09	12.55	13.08	13.55	14.87	11.71	12.17	12.71	13.18	14.49
	6H	12.73	13.11	13.75	14.15	15.47	12.34	12.73	13.36	13.77	15.08
	8H	12.95	13.29	13.98	14.32	15.65	12.56	12.90	13.59	13.93	15.26
	12H	13.09	13.39	14.12	14.41	15.79	12.68	12.97	13.71	14.00	15.37
12H	4H	12.07	12.49	13.09	13.51	14.83	11.71	12.12	12.72	13.14	14.46
	6H	12.76	13.10	13.79	14.13	15.46	12.39	12.72	13.41	13.76	15.08
	8H	13.00	13.30	14.04	14.33	15.70	12.62	12.92	13.66	13.95	15.32