

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P905166

Luminaire Tested: DFN2DIP-HX2F0-030D020US835-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P905166
REPORT IS A COMBINATION OF REPORTS P899153 AND P896039
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX2F0-030D020US835-FLLFLL
Description: 2 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4740.0 lumens
Efficiency: N/A
Efficacy: 117.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 1.99' x L: 2.3' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 40.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9951
Total Harmonic Distortion (THDi): 0.07
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P905166

CATALOG NUMBER: DFN2DIP-HX2F0-030D020US835-FLLFLL

Luminous Intensity Polar Plot

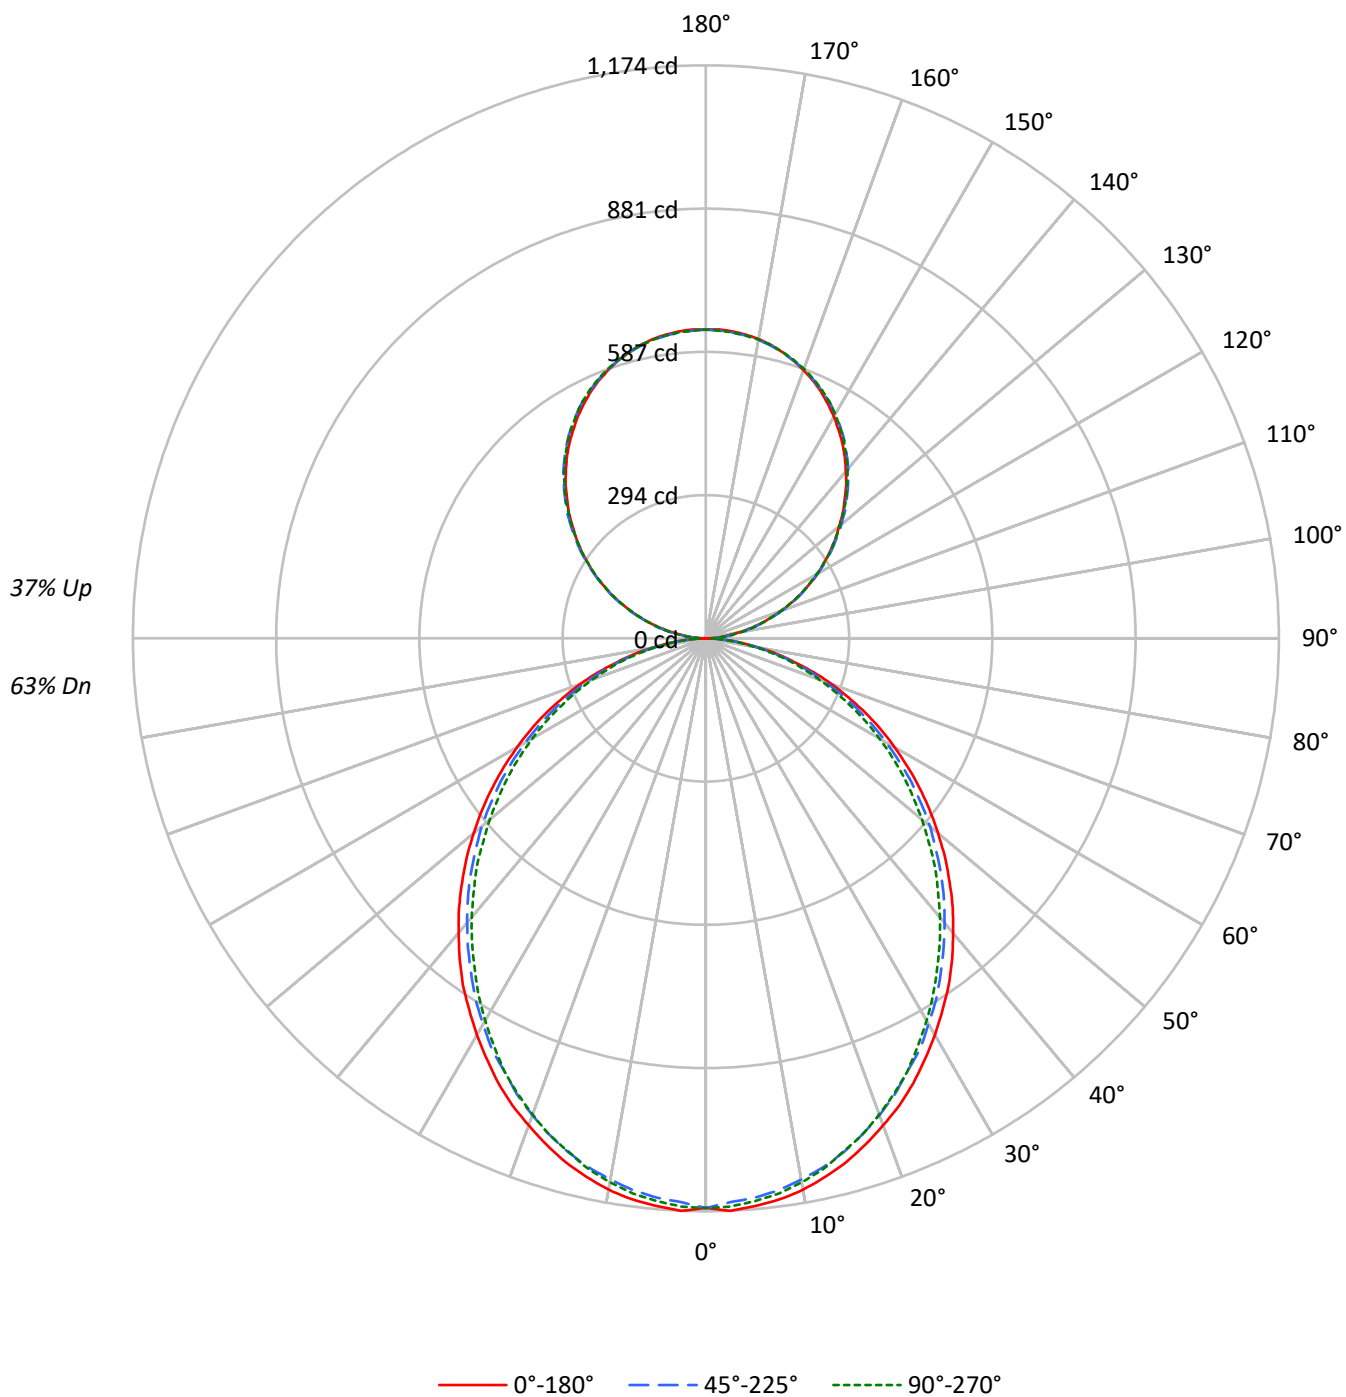

TEST NUMBER: P905166

CATALOG NUMBER: DFN2DIP-HX2F0-030D020US835-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	110	110	110	110	103	103	103	103	90	90	90	79	79	79	68	68	68
1	101	96	92	89	94	90	87	84	79	77	74	69	67	66	60	59	57
2	92	84	78	72	86	79	73	69	70	65	62	61	58	55	53	50	48
3	84	74	66	60	78	70	63	58	61	56	52	54	50	46	47	44	41
4	77	66	57	51	71	62	54	49	55	49	44	48	43	40	42	38	35
5	70	58	50	44	66	55	48	42	49	43	38	43	38	35	38	34	31
6	65	53	44	38	61	50	42	37	44	38	33	39	34	30	34	30	27
7	60	48	39	34	56	45	38	32	40	34	30	36	31	27	31	27	24
8	56	43	35	30	52	41	34	29	37	31	26	33	28	24	29	25	22
9	52	40	32	27	49	38	30	26	34	28	24	30	25	22	27	23	20
10	49	36	29	24	46	35	28	23	31	25	21	28	23	20	25	21	18

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2750	2750	2750
5°	2750	2705	2725
10°	2724	2663	2683
15°	2679	2612	2621
20°	2621	2545	2557
25°	2563	2465	2484
30°	2490	2391	2392
35°	2422	2305	2295
40°	2338	2217	2203
45°	2255	2129	2108
50°	2163	2036	1999
55°	2067	1929	1898
60°	1957	1803	1781
65°	1838	1671	1644
70°	1685	1511	1495
75°	1476	1319	1351
80°	1222	1073	1091
85°	830	673	675

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2255 cd/sqm

TEST NUMBER: P905166

CATALOG NUMBER: DFN2DIP-HX2F0-030D020US835-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	109.9	2.3
10°-20°	309.1	6.5
20°-30°	454.3	9.6
30°-40°	527.6	11.1
40°-50°	527.0	11.1
50°-60°	459.5	9.7
60°-70°	339.7	7.2
70°-80°	192.2	4.1
80°-90°	52.5	1.1
90°-100°	39.1	0.8
100°-110°	124.4	2.6
110°-120°	212.8	4.5
120°-130°	279.9	5.9
130°-140°	314.2	6.6
140°-150°	308.1	6.5
150°-160°	258.4	5.5
160°-170°	171.4	3.6
170°-180°	59.9	1.3
0°-30°	873.3	18.4
0°-40°	1400.9	29.6
0°-60°	2387.4	50.4
0°-90°	2971.8	62.7
90°-120°	376.3	7.9
90°-150°	1278.5	27.0
90°-180°	1768.0	37.3
0°-180°	4740.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1167	1167	1167	1167	1167	
5°	1167	1163	1150	1160	1157	111
15°	1111	1105	1090	1094	1089	313
25°	1006	997	978	980	978	463
35°	868	856	838	832	826	542
45°	706	698	681	669	664	545
55°	534	528	514	501	495	478
65°	360	354	342	332	327	356
75°	188	186	181	174	176	201
85°	46	45	44	40	39	51
90°	1	7	19	18	18	5
95°	28	33	34	34	33	31
105°	115	116	118	118	118	121
115°	214	217	216	215	214	211
125°	311	315	314	312	312	278
135°	402	408	409	408	407	311
145°	488	492	495	495	493	305
155°	558	559	561	564	562	257
165°	607	606	606	610	607	171
175°	631	630	629	632	629	60
180°	632	632	632	632	632	

TEST NUMBER: P905166

CATALOG NUMBER: DFN2DIP-HX2F0-030D020US835-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1167.3	1167.3	1167.3	1167.3	1167.3
2.5°	1174.1	1168.5	1156.1	1167.3	1165.2
5°	1167.3	1162.9	1150.5	1159.5	1157.3
7.5°	1159.5	1152.8	1140.4	1149.5	1147.2
10°	1147.2	1139.3	1125.9	1134.8	1131.5
12.5°	1130.3	1123.6	1110.2	1115.7	1113.5
15°	1111.2	1104.6	1089.9	1094.4	1088.8
17.5°	1087.6	1081.0	1066.3	1071.9	1066.3
20°	1061.8	1055.1	1039.4	1042.7	1038.3
22.5°	1036.1	1026.0	1011.3	1011.3	1009.0
25°	1005.7	996.8	977.7	979.9	977.7
27.5°	972.0	964.1	949.6	946.3	940.7
30°	938.4	929.4	912.6	909.2	904.7
32.5°	902.5	895.8	877.8	871.0	866.5
35°	867.7	856.5	838.5	831.7	826.1
37.5°	828.4	818.3	800.3	792.4	786.8
40°	788.0	779.0	761.0	751.0	746.5
42.5°	748.7	739.7	721.8	710.5	703.8
45°	706.1	698.2	681.3	669.0	664.5
47.5°	664.5	656.7	638.7	626.3	619.6
50°	620.7	615.1	599.4	583.7	578.1
52.5°	578.1	570.2	555.7	543.3	535.4
55°	534.4	527.6	514.1	500.7	495.1
57.5°	490.5	484.9	470.3	456.8	452.3
60°	446.7	442.3	426.6	414.2	410.9
62.5°	404.1	396.2	385.0	373.8	369.3
65°	360.4	353.6	342.4	332.3	326.7
67.5°	315.5	309.8	299.7	291.9	287.4
70°	273.9	269.4	259.3	251.4	247.0
72.5°	231.3	226.7	221.1	213.3	210.0
75°	188.5	186.4	180.7	174.0	176.3
77.5°	150.4	145.9	143.6	140.3	137.0
80°	112.3	111.1	108.8	105.5	103.3
82.5°	76.3	76.3	75.3	70.7	70.7
85°	46.0	44.9	43.8	40.4	39.3
87.5°	20.2	18.0	15.7	12.4	11.2
90°	0.6	6.9	18.7	17.5	18.1
92.5°	11.8	16.0	16.6	17.2	17.2
95°	27.8	33.2	34.1	34.1	33.2
97.5°	46.3	51.3	53.4	53.4	53.4
100°	67.7	72.1	73.6	73.6	73.0
102.5°	90.2	93.4	95.5	96.1	95.5
105°	114.8	116.3	117.5	118.4	118.4
107.5°	139.2	141.5	141.5	141.9	139.2
110°	162.9	165.9	165.9	165.9	164.4

TEST NUMBER: P905166

CATALOG NUMBER: DFN2DIP-HX2F0-030D020US835-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	188.4	191.6	191.1	189.5	188.4
115°	213.6	216.6	215.7	215.1	213.6
117.5°	238.6	242.8	240.1	238.6	237.0
120°	263.7	267.9	263.7	263.7	262.0
122.5°	286.6	291.9	289.3	287.8	286.6
125°	310.6	315.4	313.9	312.2	311.6
127.5°	334.1	340.0	337.9	335.6	334.1
130°	356.0	362.9	361.9	360.8	358.7
132.5°	380.6	386.0	386.3	383.7	382.1
135°	401.8	407.7	408.8	408.3	406.7
137.5°	425.4	430.2	431.2	430.8	428.5
140°	446.2	451.0	453.7	453.7	451.6
142.5°	467.6	472.3	473.9	474.4	472.3
145°	487.8	491.6	494.7	495.2	493.1
147.5°	505.9	510.7	513.0	513.9	511.8
150°	524.6	527.8	529.9	531.6	529.9
152.5°	541.2	544.4	547.1	549.2	547.1
155°	557.8	559.3	561.0	563.7	562.0
157.5°	572.1	573.2	574.2	578.0	575.3
160°	584.9	586.0	586.6	589.8	587.5
162.5°	596.7	596.7	597.2	600.9	598.2
165°	606.8	606.2	606.2	610.0	607.4
167.5°	615.9	614.2	614.2	618.0	615.4
170°	622.8	621.3	620.7	624.5	621.3
172.5°	627.6	626.0	625.5	629.3	626.0
175°	631.4	629.9	628.7	632.5	629.3
177.5°	633.5	632.0	630.8	634.0	630.8
180°	632.5	632.5	632.5	632.5	632.5

TEST NUMBER: P905166

CATALOG NUMBER: DFN2DIP-HX2F0-030D020US835-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.74	12.73	12.58	13.60	14.67	11.32	12.31	12.16	13.17	14.25
	3H	13.39	14.28	14.24	15.15	16.25	12.93	13.82	13.78	14.69	15.79
	4H	13.97	14.80	14.83	15.68	16.80	13.51	14.35	14.38	15.22	16.34
	6H	14.35	15.13	15.23	16.01	17.14	13.89	14.67	14.78	15.55	16.68
	8H	14.45	15.19	15.34	16.09	17.22	13.99	14.73	14.88	15.63	16.76
	12H	14.50	15.20	15.39	16.09	17.25	14.03	14.74	14.93	15.63	16.79
4H	2H	12.21	13.05	13.08	13.93	15.04	11.87	12.71	12.75	13.59	14.70
	3H	14.06	14.76	14.94	15.67	16.80	13.68	14.38	14.56	15.29	16.42
	4H	14.76	15.40	15.66	16.30	17.46	14.37	15.00	15.26	15.91	17.07
	6H	15.26	15.81	16.17	16.74	17.90	14.86	15.41	15.77	16.35	17.50
	8H	15.40	15.91	16.31	16.84	18.01	15.00	15.52	15.92	16.44	17.61
	12H	15.47	15.93	16.40	16.87	18.05	15.06	15.53	16.00	16.47	17.65
8H	4H	14.96	15.47	15.87	16.40	17.57	14.60	15.12	15.52	16.04	17.22
	6H	15.56	15.99	16.50	16.96	18.13	15.21	15.64	16.15	16.60	17.78
	8H	15.77	16.15	16.72	17.10	18.29	15.41	15.79	16.36	16.75	17.94
	12H	15.89	16.22	16.84	17.17	18.41	15.52	15.85	16.47	16.80	18.04
12H	4H	14.94	15.41	15.88	16.35	17.53	14.60	15.07	15.53	16.01	17.19
	6H	15.59	15.97	16.54	16.92	18.11	15.25	15.63	16.20	16.58	17.77
	8H	15.82	16.15	16.77	17.10	18.34	15.47	15.81	16.43	16.76	17.99