

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P905187

Luminaire Tested: DFN2DIP-HX2F0-040D020US835-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P905187
REPORT IS A COMBINATION OF REPORTS P900675 AND P897595
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX2F0-040D020US835-FLLONL
Description: 2 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5940.0 lumens
Efficiency: N/A
Efficacy: 115.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 1.99' x L: 2.3' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 51.3
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P905187

CATALOG NUMBER: DFN2DIP-HX2F0-040D020US835-FLLONL

Luminous Intensity Polar Plot

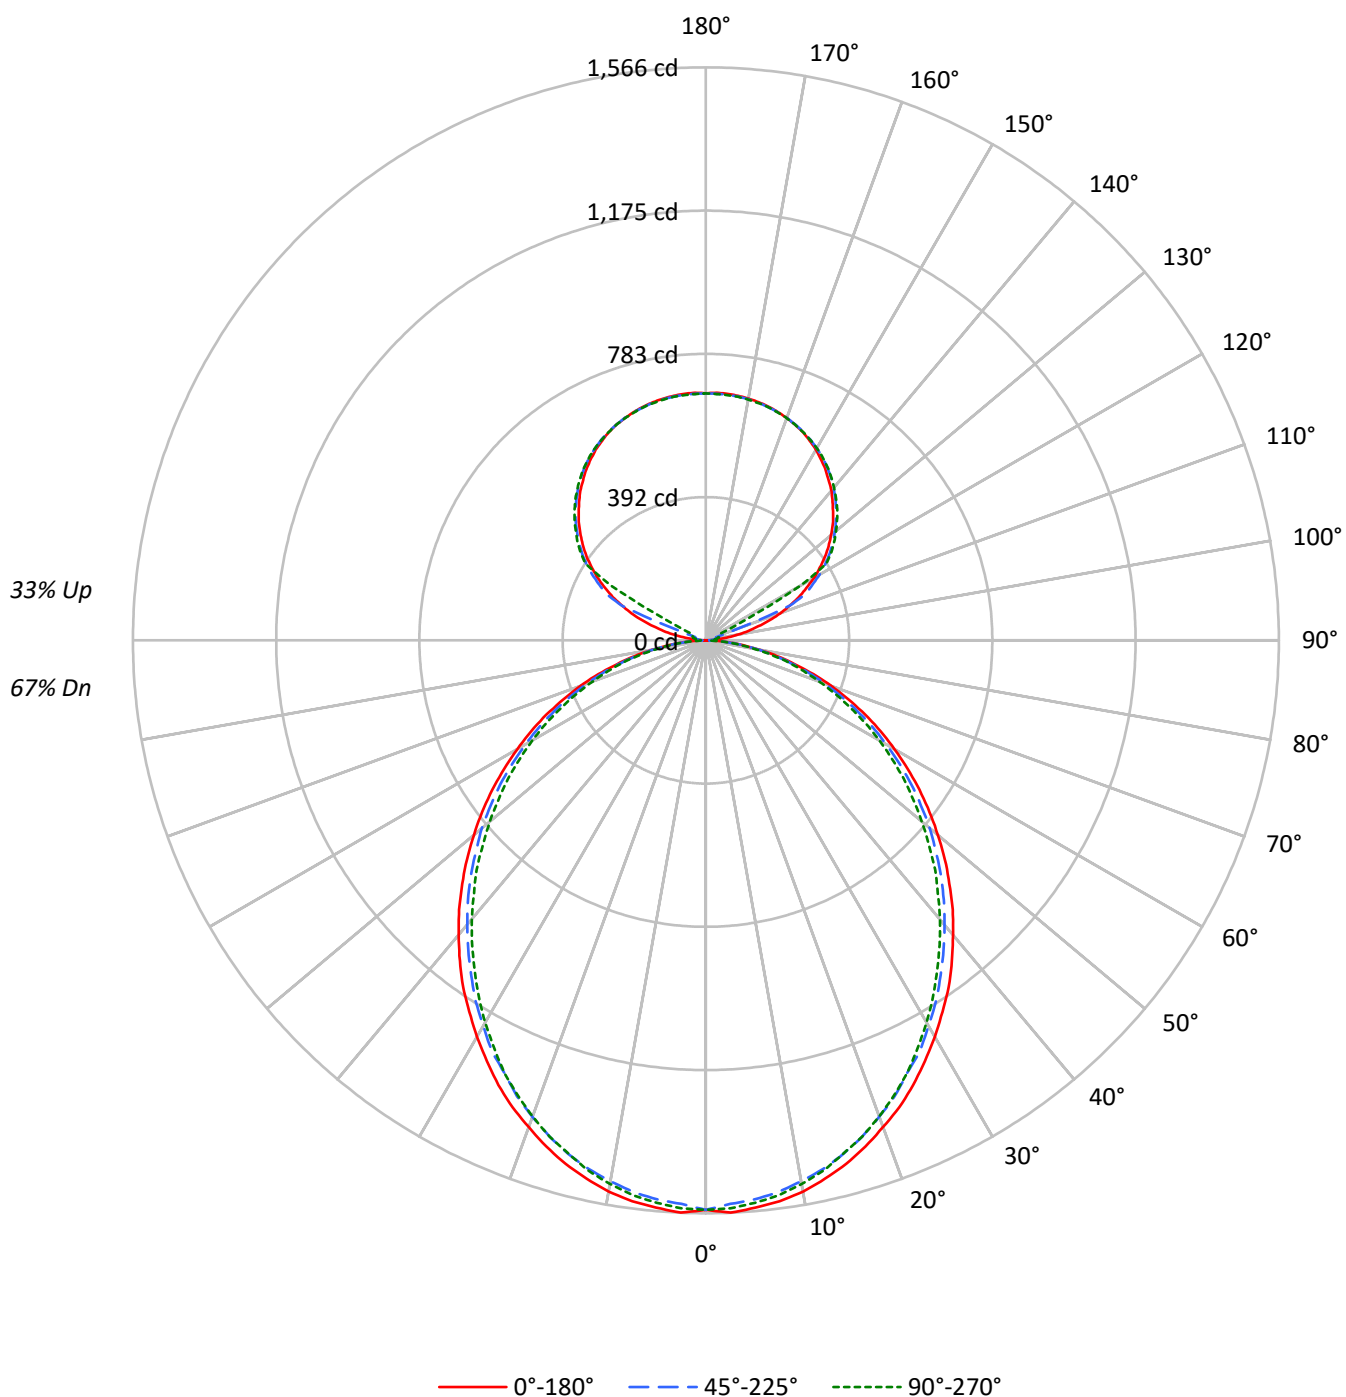

TEST NUMBER: P905187

CATALOG NUMBER: DFN2DIP-HX2F0-040D020US835-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	111	111	111	111	105	105	105	105	93	93	93	82	82	82	71	71	71
1	102	97	93	90	95	92	88	85	81	79	76	72	70	68	63	62	60
2	92	85	79	73	87	80	75	70	71	67	63	63	60	57	56	53	51
3	84	75	67	61	79	71	64	58	63	58	53	56	52	48	49	46	43
4	77	66	58	52	72	63	55	50	56	50	45	50	45	41	44	40	37
5	71	59	51	44	67	56	48	43	50	44	39	45	40	36	40	36	33
6	66	53	45	39	62	50	43	37	45	39	34	41	35	32	36	32	29
7	61	48	40	34	57	46	38	33	41	35	30	37	32	28	33	29	26
8	56	44	36	30	53	42	34	29	38	31	27	34	29	25	30	26	23
9	53	40	32	27	50	38	31	26	35	29	24	31	26	23	28	24	21
10	49	37	29	24	46	35	28	24	32	26	22	29	24	20	26	22	19

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3667	3667	3667
5°	3667	3607	3634
10°	3632	3550	3578
15°	3572	3483	3494
20°	3494	3393	3409
25°	3417	3287	3311
30°	3321	3188	3189
35°	3229	3073	3061
40°	3118	2956	2937
45°	3006	2839	2811
50°	2884	2715	2665
55°	2755	2572	2530
60°	2610	2404	2375
65°	2450	2228	2192
70°	2247	2014	1993
75°	1969	1758	1801
80°	1629	1431	1454
85°	1106	898	900

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3006 cd/sqm

TEST NUMBER: P905187

CATALOG NUMBER: DFN2DIP-HX2F0-040D020US835-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	146.5	2.5
10°-20°	412.2	6.9
20°-30°	605.7	10.2
30°-40°	703.5	11.8
40°-50°	702.6	11.8
50°-60°	612.7	10.3
60°-70°	452.9	7.6
70°-80°	256.2	4.3
80°-90°	68.8	1.2
90°-100°	22.3	0.4
100°-110°	83.0	1.4
110°-120°	220.1	3.7
120°-130°	365.0	6.1
130°-140°	387.7	6.5
140°-150°	360.3	6.1
150°-160°	289.7	4.9
160°-170°	186.7	3.1
170°-180°	64.2	1.1
0°-30°	1164.4	19.6
0°-40°	1867.9	31.4
0°-60°	3183.2	53.6
0°-90°	3961.2	66.7
90°-120°	325.3	5.5
90°-150°	1438.2	24.2
90°-180°	1979.0	33.3
0°-180°	5940.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1556	1556	1556	1556	1556	
5°	1556	1550	1534	1546	1543	148
15°	1482	1473	1453	1459	1452	417
25°	1341	1329	1304	1306	1304	617
35°	1157	1142	1118	1109	1102	722
45°	941	931	908	892	886	727
55°	712	703	686	668	660	637
65°	480	471	456	443	436	475
75°	251	248	241	232	235	268
85°	61	60	58	54	52	68
90°	0	6	10	12	13	6
95°	32	16	19	22	21	38
105°	148	163	30	35	37	159
115°	281	289	301	75	40	276
125°	397	403	413	416	418	354
135°	491	499	504	508	508	380
145°	570	570	578	581	579	356
155°	628	623	629	632	628	289
165°	661	658	660	663	660	187
175°	676	673	674	677	672	64
180°	675	675	675	675	675	

TEST NUMBER: P905187

CATALOG NUMBER: DFN2DIP-HX2F0-040D020US835-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1556.4	1556.4	1556.4	1556.4	1556.4
2.5°	1565.5	1558.0	1541.5	1556.4	1553.6
5°	1556.4	1550.5	1534.0	1545.9	1543.1
7.5°	1545.9	1537.0	1520.5	1532.6	1529.6
10°	1529.6	1519.1	1501.2	1513.1	1508.6
12.5°	1507.0	1498.1	1480.2	1487.7	1484.6
15°	1481.6	1472.7	1453.2	1459.2	1451.8
17.5°	1450.2	1441.3	1421.8	1429.2	1421.8
20°	1415.7	1406.8	1385.9	1390.3	1384.5
22.5°	1381.4	1367.9	1348.4	1348.4	1345.4
25°	1340.9	1329.0	1303.6	1306.5	1303.6
27.5°	1296.0	1285.5	1266.2	1261.7	1254.3
30°	1251.2	1239.2	1216.8	1212.3	1206.3
32.5°	1203.3	1194.4	1170.4	1161.4	1155.3
35°	1156.9	1142.0	1118.0	1109.0	1101.5
37.5°	1104.5	1091.0	1067.0	1056.6	1049.1
40°	1050.7	1038.6	1014.6	1001.3	995.3
42.5°	998.3	986.2	962.4	947.3	938.4
45°	941.4	931.0	908.4	892.1	886.0
47.5°	886.0	875.5	851.6	835.1	826.2
50°	827.6	820.1	799.2	778.2	770.7
52.5°	770.7	760.3	740.9	724.4	713.9
55°	712.5	703.4	685.5	667.5	660.1
57.5°	654.0	646.6	627.0	609.1	603.1
60°	595.6	589.7	568.8	552.3	547.8
62.5°	538.8	528.3	513.4	498.4	492.4
65°	480.5	471.4	456.5	443.0	435.6
67.5°	420.6	413.0	399.7	389.2	383.2
70°	365.2	359.2	345.7	335.2	329.3
72.5°	308.4	302.3	294.9	284.4	279.9
75°	251.4	248.5	240.9	232.0	235.0
77.5°	200.5	194.5	191.5	187.0	182.6
80°	149.7	148.1	145.1	140.7	137.7
82.5°	101.8	101.8	100.4	94.3	94.3
85°	61.3	59.9	58.4	53.8	52.4
87.5°	27.0	24.0	21.0	16.5	14.9
90°	0.5	5.9	9.7	12.2	13.2
92.5°	12.2	10.3	11.7	12.7	13.2
95°	31.7	15.6	19.0	21.5	21.0
97.5°	57.1	17.1	24.9	26.4	26.9
100°	86.5	19.5	27.8	31.7	32.7
102.5°	118.7	117.7	28.8	34.2	35.7
105°	148.5	163.1	29.8	35.1	37.1
107.5°	183.2	195.3	30.8	36.1	38.1
110°	216.4	226.6	85.5	36.7	38.6

TEST NUMBER: P905187

CATALOG NUMBER: DFN2DIP-HX2F0-040D020US835-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	247.6	256.4	248.1	37.6	39.1
115°	280.8	289.1	301.4	75.2	40.1
117.5°	309.6	319.4	327.7	257.9	129.9
120°	341.9	349.2	358.0	363.9	297.9
122.5°	369.2	377.0	386.8	389.7	390.3
125°	397.1	403.4	412.7	416.1	417.6
127.5°	422.5	429.3	436.7	441.5	442.0
130°	446.4	454.2	459.6	465.0	464.5
132.5°	470.8	477.2	482.5	486.9	486.5
135°	491.4	499.2	503.5	508.5	507.5
137.5°	512.8	518.7	523.6	528.5	527.0
140°	533.8	537.8	543.1	547.5	545.1
142.5°	551.4	554.9	561.2	565.1	562.6
145°	570.0	569.5	577.8	581.2	578.8
147.5°	586.1	584.6	592.9	595.3	593.4
150°	601.7	598.3	606.1	609.0	606.6
152.5°	614.9	611.0	618.3	621.3	617.8
155°	627.6	623.2	629.1	632.0	628.1
157.5°	637.9	634.0	638.4	641.8	637.9
160°	646.7	643.7	646.7	649.6	646.2
162.5°	654.4	651.5	654.0	657.4	653.0
165°	661.3	658.4	659.8	663.3	659.8
167.5°	666.7	663.7	665.2	668.7	664.2
170°	671.1	668.1	669.1	672.5	668.1
172.5°	674.0	671.1	672.1	675.5	671.1
175°	676.4	673.0	674.0	677.4	672.5
177.5°	677.4	674.0	674.5	677.9	673.5
180°	675.0	675.0	675.0	675.0	675.0

TEST NUMBER: P905187

CATALOG NUMBER: DFN2DIP-HX2F0-040D020US835-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.06	14.10	13.86	14.92	15.93	12.64	13.67	13.44	14.50	15.51
	3H	14.71	15.64	15.52	16.47	17.51	14.25	15.18	15.06	16.01	17.05
	4H	15.29	16.17	16.12	17.01	18.06	14.83	15.71	15.66	16.55	17.60
	6H	15.68	16.49	16.52	17.34	18.40	15.22	16.03	16.06	16.88	17.94
	8H	15.78	16.55	16.63	17.42	18.48	15.32	16.09	16.17	16.96	18.02
	12H	15.82	16.56	16.68	17.42	18.51	15.36	16.10	16.22	16.96	18.05
4H	2H	13.54	14.41	14.37	15.25	16.30	13.20	14.07	14.03	14.91	15.96
	3H	15.39	16.12	16.23	16.99	18.06	15.00	15.74	15.85	16.61	17.68
	4H	16.09	16.76	16.95	17.63	18.72	15.69	16.36	16.55	17.23	18.33
	6H	16.59	17.17	17.46	18.06	19.16	16.19	16.77	17.07	17.67	18.76
	8H	16.73	17.27	17.61	18.16	19.27	16.33	16.87	17.21	17.76	18.87
	12H	16.80	17.29	17.70	18.20	19.31	16.40	16.88	17.29	17.79	18.91
8H	4H	16.29	16.83	17.17	17.72	18.83	15.94	16.48	16.81	17.37	18.48
	6H	16.90	17.34	17.80	18.27	19.38	16.55	16.99	17.45	17.92	19.03
	8H	17.10	17.50	18.02	18.42	19.55	16.75	17.14	17.66	18.07	19.19
	12H	17.23	17.58	18.14	18.49	19.67	16.86	17.21	17.78	18.12	19.30
12H	4H	16.28	16.77	17.18	17.67	18.79	15.94	16.42	16.83	17.33	18.45
	6H	16.92	17.32	17.84	18.24	19.37	16.58	16.98	17.50	17.90	19.03
	8H	17.16	17.50	18.07	18.42	19.60	16.81	17.16	17.73	18.07	19.25