

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P905232

Luminaire Tested: DFN2DIP-HX2F0-060D030US835-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P905232
REPORT IS A COMBINATION OF REPORTS P899170 AND P896039
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX2F0-060D030US835-RLLFLL
Description: 2 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7755.0 lumens
Efficiency: N/A
Efficacy: 95.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 1.99' x L: 2.3' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 81.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9971
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P905232

CATALOG NUMBER: DFN2DIP-HX2F0-060D030US835-RLFL

Luminous Intensity Polar Plot

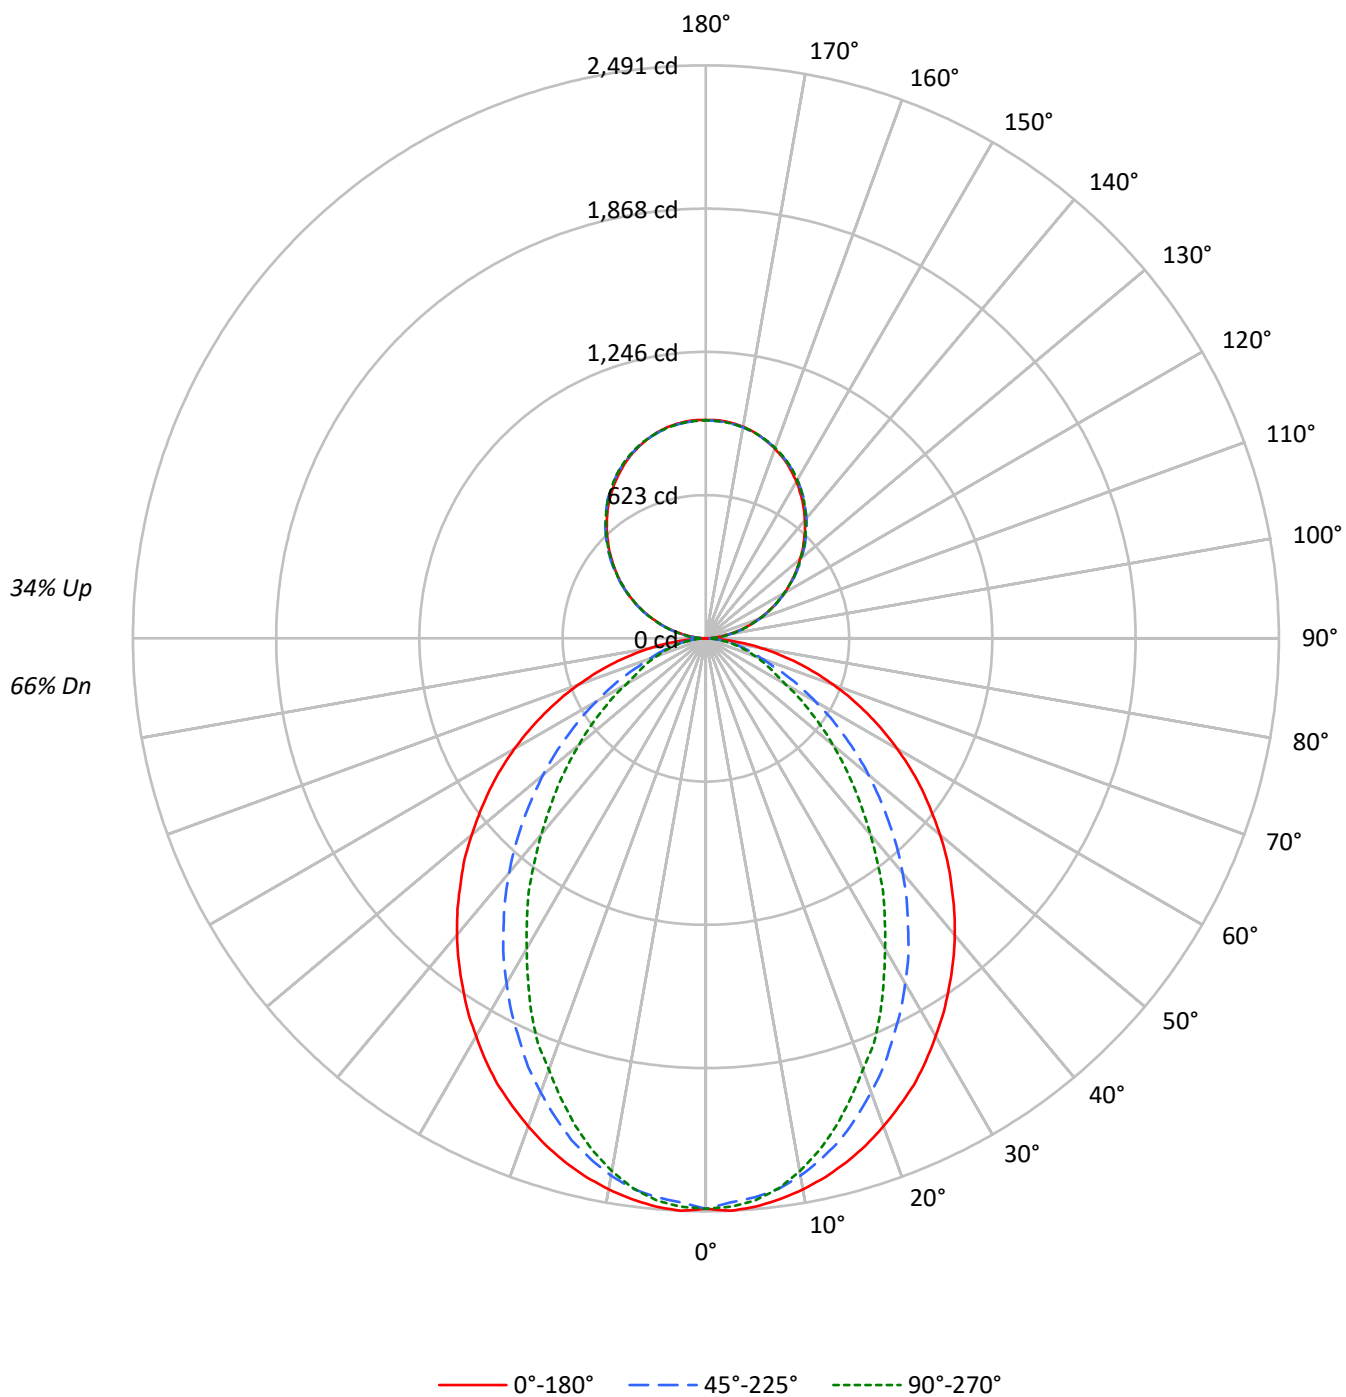

TEST NUMBER: P905232

CATALOG NUMBER: DFN2DIP-HX2F0-060D030US835-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	111	111	111	111	104	104	104	104	92	92	92	81	81	81	71	71	71
1	102	98	94	91	96	92	89	86	82	79	77	72	70	69	63	62	61
2	93	86	80	75	88	81	76	72	72	68	65	64	61	58	57	54	52
3	86	76	69	63	80	72	66	61	65	59	55	57	53	50	51	48	45
4	79	68	60	54	74	65	58	52	58	52	48	52	47	44	46	42	40
5	73	61	53	47	68	58	51	45	52	46	42	47	42	38	42	38	35
6	67	55	47	41	63	52	45	40	47	41	37	42	38	34	38	34	31
7	62	50	42	37	59	48	40	35	43	37	33	39	34	30	35	31	28
8	58	46	38	33	55	44	37	32	40	34	29	36	31	27	32	28	25
9	54	42	35	29	51	40	33	29	36	31	27	33	28	25	30	26	23
10	51	39	31	27	48	37	30	26	34	28	24	31	26	23	28	24	21

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5843	5843	5843
5°	5843	5736	5776
10°	5776	5610	5577
15°	5687	5411	5277
20°	5572	5143	4912
25°	5455	4844	4560
30°	5301	4539	4118
35°	5149	4213	3728
40°	4994	3877	3285
45°	4815	3507	2883
50°	4630	3133	2492
55°	4435	2737	2116
60°	4209	2324	1732
65°	3948	1906	1547
70°	3631	1516	1385
75°	3233	1310	1239
80°	2661	1061	1043
85°	1740	655	731

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 4815 cd/sqm

TEST NUMBER: P905232

CATALOG NUMBER: DFN2DIP-HX2F0-060D030US835-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	232.4	3.0
10°-20°	638.0	8.2
20°-30°	895.7	11.6
30°-40°	976.4	12.6
40°-50°	897.4	11.6
50°-60°	704.8	9.1
60°-70°	458.8	5.9
70°-80°	236.1	3.0
80°-90°	63.0	0.8
90°-100°	58.7	0.8
100°-110°	186.5	2.4
110°-120°	319.2	4.1
120°-130°	419.8	5.4
130°-140°	471.2	6.1
140°-150°	462.1	6.0
150°-160°	387.7	5.0
160°-170°	257.1	3.3
170°-180°	89.9	1.2
0°-30°	1766.2	22.8
0°-40°	2742.6	35.4
0°-60°	4344.8	56.0
0°-90°	5102.7	65.8
90°-120°	564.5	7.3
90°-150°	1917.7	24.7
90°-180°	2652.0	34.2
0°-180°	7755.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2480	2480	2480	2480	2480	
5°	2480	2469	2439	2460	2453	235
15°	2359	2334	2258	2215	2193	665
25°	2141	2069	1921	1829	1795	985
35°	1845	1730	1533	1391	1342	1155
45°	1508	1358	1122	963	909	1165
55°	1147	972	729	595	552	1025
65°	774	592	390	314	307	768
75°	413	256	180	164	162	437
85°	96	49	43	43	43	111
90°	1	10	28	26	27	8
95°	42	50	51	51	50	46
105°	172	174	176	178	178	182
115°	320	325	324	323	320	317
125°	466	473	471	468	467	416
135°	603	612	613	612	610	466
145°	732	737	742	743	740	457
155°	837	839	842	846	843	385
165°	910	909	909	915	911	257
175°	947	945	943	949	944	90
180°	949	949	949	949	949	

TEST NUMBER: P905232

CATALOG NUMBER: DFN2DIP-HX2F0-060D030US835-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2479.8	2479.8	2479.8	2479.8	2479.8
2.5°	2491.0	2479.8	2455.0	2477.6	2473.1
5°	2479.8	2468.6	2439.3	2459.6	2452.9
7.5°	2459.6	2446.2	2414.8	2423.6	2412.4
10°	2432.6	2416.9	2372.2	2365.3	2351.9
12.5°	2399.1	2378.8	2318.1	2304.8	2280.0
15°	2358.6	2333.8	2257.6	2215.0	2192.6
17.5°	2311.5	2275.5	2181.2	2131.9	2096.0
20°	2257.6	2212.6	2100.5	2044.5	1995.0
22.5°	2199.3	2147.6	2017.4	1941.2	1907.6
25°	2141.0	2069.1	1921.0	1829.1	1795.3
27.5°	2071.5	1995.0	1831.2	1725.7	1674.1
30°	1997.4	1911.9	1732.4	1618.1	1557.4
32.5°	1925.5	1822.2	1638.4	1503.6	1447.4
35°	1844.8	1730.3	1532.9	1391.4	1341.9
37.5°	1766.2	1642.6	1434.1	1279.1	1223.1
40°	1683.1	1548.6	1330.7	1171.4	1113.1
42.5°	1597.9	1454.3	1227.6	1061.4	1005.5
45°	1508.1	1357.6	1122.2	962.6	908.8
47.5°	1422.9	1263.6	1021.2	861.7	812.4
50°	1328.6	1169.3	922.4	767.4	720.5
52.5°	1236.4	1068.1	828.1	680.0	637.4
55°	1146.7	971.7	729.3	594.8	552.1
57.5°	1054.8	875.2	641.9	516.2	480.2
60°	960.5	781.0	549.8	435.5	399.5
62.5°	868.6	689.1	471.2	363.6	345.7
65°	774.3	592.4	390.5	314.3	307.4
67.5°	684.5	502.6	314.3	276.0	269.3
70°	590.2	415.2	260.2	237.9	228.8
72.5°	500.5	334.3	217.6	199.8	195.2
75°	412.9	255.7	179.5	163.8	161.7
77.5°	325.5	181.7	141.4	132.4	127.9
80°	244.5	130.2	107.6	98.8	98.8
82.5°	170.5	87.6	74.0	69.5	69.5
85°	96.4	49.3	42.6	42.6	42.6
87.5°	36.0	17.9	17.9	15.7	15.7
90°	0.9	10.3	28.0	26.3	27.2
92.5°	17.7	24.0	24.9	25.7	25.7
95°	41.8	49.8	51.2	51.2	49.8
97.5°	69.5	76.9	80.1	80.1	80.1
100°	101.5	108.1	110.4	110.4	109.6
102.5°	135.3	140.2	143.3	144.2	143.3
105°	172.2	174.5	176.2	177.6	177.6
107.5°	208.8	212.2	212.2	212.8	208.8
110°	244.3	248.9	248.9	248.9	246.6

TEST NUMBER: P905232

CATALOG NUMBER: DFN2DIP-HX2F0-060D030US835-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	282.6	287.5	286.6	284.3	282.6
115°	320.4	324.9	323.5	322.7	320.4
117.5°	357.8	364.1	360.1	357.8	355.5
120°	395.6	401.9	395.6	395.6	393.0
122.5°	429.9	437.9	433.9	431.6	429.9
125°	466.0	473.1	470.8	468.2	467.4
127.5°	501.1	510.0	506.9	503.4	501.1
130°	534.0	544.3	542.9	541.2	538.0
132.5°	570.9	578.9	579.5	575.5	573.2
135°	602.7	611.5	613.3	612.4	610.1
137.5°	638.1	645.3	646.7	646.2	642.7
140°	669.3	676.5	680.5	680.5	677.3
142.5°	701.4	708.5	710.8	711.7	708.5
145°	731.7	737.4	742.0	742.8	739.7
147.5°	758.9	766.0	769.4	770.9	767.7
150°	786.9	791.8	794.9	797.5	794.9
152.5°	811.8	816.6	820.6	823.8	820.6
155°	836.7	838.9	841.5	845.5	843.0
157.5°	858.1	859.8	861.3	867.0	863.0
160°	877.3	879.0	879.9	884.7	881.3
162.5°	895.0	895.0	895.9	901.3	897.3
165°	910.2	909.3	909.3	915.0	911.0
167.5°	923.9	921.3	921.3	927.0	923.0
170°	934.2	931.9	931.1	936.8	931.9
172.5°	941.3	939.1	938.2	943.9	939.1
175°	947.1	944.8	943.1	948.8	943.9
177.5°	950.2	947.9	946.2	951.1	946.2
180°	948.8	948.8	948.8	948.8	948.8

TEST NUMBER: P905232

CATALOG NUMBER: DFN2DIP-HX2F0-060D030US835-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	14.50	15.48	15.32	16.31	17.34	10.49	11.46	11.30	12.30	13.33
	3H	16.17	17.04	17.00	17.88	18.94	11.67	12.54	12.50	13.39	14.44
	4H	16.76	17.59	17.61	18.44	19.51	12.11	12.94	12.96	13.79	14.86
	6H	17.17	17.93	18.03	18.79	19.87	12.43	13.19	13.29	14.05	15.13
	8H	17.29	18.02	18.16	18.89	19.97	12.52	13.24	13.38	14.11	15.20
	12H	17.35	18.04	18.22	18.91	20.01	12.56	13.24	13.43	14.11	15.22
4H	2H	14.54	15.36	15.39	16.21	17.28	11.09	11.91	11.94	12.76	13.83
	3H	16.35	17.03	17.21	17.92	19.00	12.43	13.11	13.29	14.00	15.08
	4H	17.03	17.65	17.90	18.53	19.64	12.97	13.59	13.84	14.47	15.58
	6H	17.53	18.06	18.42	18.97	20.08	13.38	13.91	14.27	14.82	15.93
	8H	17.69	18.19	18.58	19.09	20.22	13.50	14.00	14.39	14.90	16.03
	12H	17.78	18.23	18.69	19.15	20.28	13.56	14.01	14.47	14.93	16.06
8H	4H	17.00	17.50	17.89	18.40	19.53	13.24	13.75	14.14	14.64	15.77
	6H	17.55	17.96	18.47	18.90	20.03	13.74	14.16	14.66	15.10	16.23
	8H	17.75	18.11	18.68	19.05	20.19	13.92	14.29	14.85	15.22	16.37
	12H	17.87	18.20	18.81	19.12	20.32	14.03	14.36	14.97	15.28	16.48
12H	4H	16.96	17.41	17.87	18.33	19.46	13.25	13.70	14.16	14.62	15.75
	6H	17.52	17.89	18.45	18.82	19.96	13.79	14.16	14.72	15.09	16.23
	8H	17.73	18.05	18.66	18.98	20.17	13.99	14.31	14.92	15.24	16.43

END OF REPORT