

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P905237

Luminaire Tested: DFN2DIP-HX2F0-060D040US835-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P905237
REPORT IS A COMBINATION OF REPORTS P900700 AND P897595
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX2F0-060D040US835-RLLONL
Description: 2 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 9060.0 lumens
Efficiency: N/A
Efficacy: 102.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 1.99' x L: 2.3' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 88.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9971
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P905237

CATALOG NUMBER: DFN2DIP-HX2F0-060D040US835-RLLONL

Luminous Intensity Polar Plot

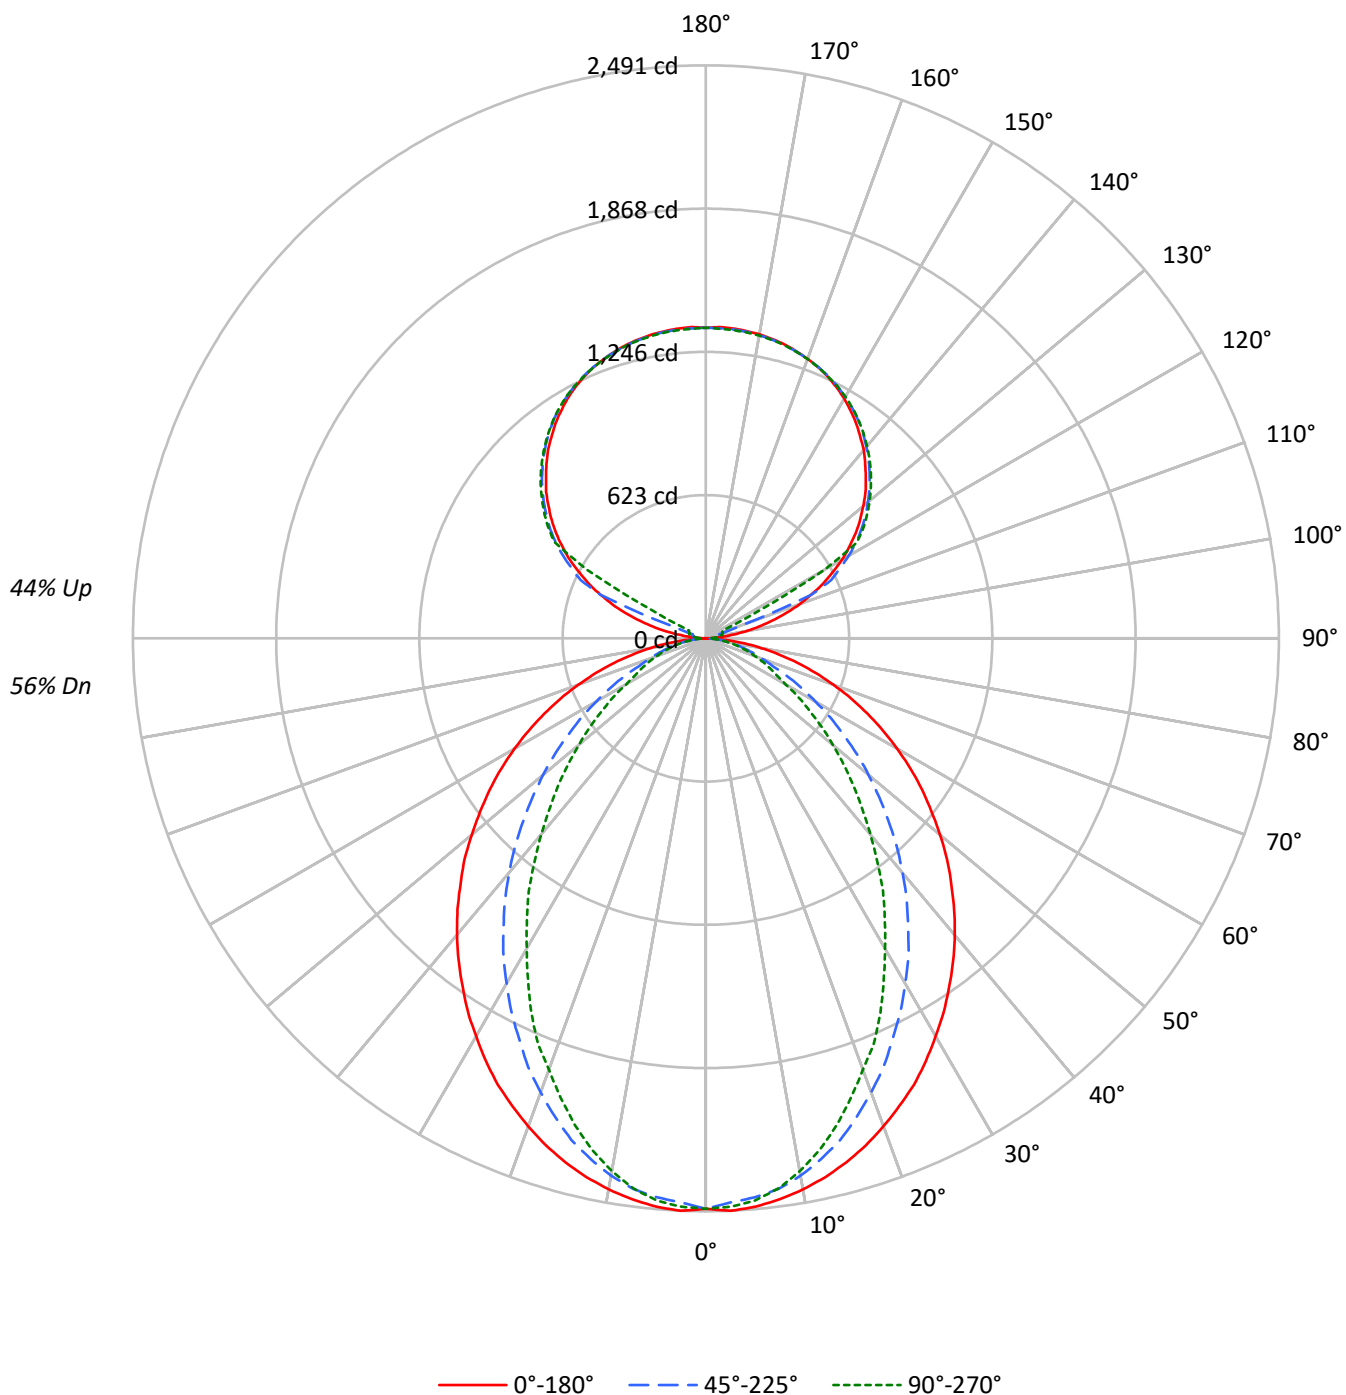

TEST NUMBER: P905237

CATALOG NUMBER: DFN2DIP-HX2F0-060D040US835-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	109	109	109	109	101	101	101	101	87	87	87	74	74	74	62	62	62
1	100	96	92	88	93	89	86	83	77	75	72	66	64	63	56	54	53
2	91	84	78	73	85	79	73	69	68	64	61	58	56	53	50	48	46
3	84	74	67	62	78	70	63	58	61	56	52	52	49	46	44	42	40
4	77	66	59	53	71	62	55	50	54	49	45	47	43	40	40	37	35
5	71	59	51	46	66	56	49	43	49	43	39	42	38	35	36	33	31
6	65	54	46	40	61	50	43	38	44	39	34	39	34	31	33	30	27
7	61	49	41	35	56	46	39	34	40	35	30	35	31	27	30	27	24
8	56	44	37	31	52	42	35	30	37	31	27	32	28	25	28	25	22
9	53	41	33	28	49	38	32	27	34	28	25	30	25	22	26	23	20
10	49	37	30	25	46	35	29	24	31	26	22	28	23	20	24	21	18

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5843	5843	5843
5°	5843	5736	5776
10°	5776	5610	5577
15°	5687	5411	5277
20°	5572	5143	4912
25°	5455	4844	4560
30°	5301	4539	4118
35°	5149	4213	3728
40°	4994	3877	3285
45°	4815	3507	2883
50°	4630	3133	2492
55°	4435	2737	2116
60°	4209	2324	1732
65°	3948	1906	1547
70°	3631	1516	1385
75°	3233	1310	1239
80°	2661	1061	1043
85°	1740	655	731

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 4815 cd/sqm

TEST NUMBER: P905237

CATALOG NUMBER: DFN2DIP-HX2F0-060D040US835-RLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	232.4	2.6
10°-20°	638.0	7.0
20°-30°	895.7	9.9
30°-40°	976.4	10.8
40°-50°	897.4	9.9
50°-60°	704.8	7.8
60°-70°	458.8	5.1
70°-80°	236.1	2.6
80°-90°	62.7	0.7
90°-100°	44.5	0.5
100°-110°	165.9	1.8
110°-120°	440.1	4.9
120°-130°	729.9	8.1
130°-140°	775.4	8.6
140°-150°	720.6	8.0
150°-160°	579.4	6.4
160°-170°	373.3	4.1
170°-180°	128.5	1.4
0°-30°	1766.2	19.5
0°-40°	2742.6	30.3
0°-60°	4344.8	48.0
0°-90°	5102.4	56.3
90°-120°	650.5	7.2
90°-150°	2876.4	31.7
90°-180°	3958.0	43.7
0°-180°	9060.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2480	2480	2480	2480	2480	
5°	2480	2469	2439	2460	2453	235
15°	2359	2334	2258	2215	2193	665
25°	2141	2069	1921	1829	1795	985
35°	1845	1730	1533	1391	1342	1155
45°	1508	1358	1122	963	909	1165
55°	1147	972	729	595	552	1025
65°	774	592	390	314	307	768
75°	413	256	180	164	162	437
85°	96	49	43	43	43	111
90°	1	12	20	24	26	9
95°	63	31	38	43	42	75
105°	297	326	60	70	74	317
115°	562	578	603	150	80	553
125°	794	807	825	832	835	708
135°	983	998	1007	1017	1015	759
145°	1140	1139	1156	1162	1158	713
155°	1255	1246	1258	1264	1256	578
165°	1323	1317	1320	1326	1320	374
175°	1353	1346	1348	1355	1345	129
180°	1350	1350	1350	1350	1350	

TEST NUMBER: P905237

CATALOG NUMBER: DFN2DIP-HX2F0-060D040US835-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2479.8	2479.8	2479.8	2479.8	2479.8
2.5°	2491.0	2479.8	2455.0	2477.6	2473.1
5°	2479.8	2468.6	2439.3	2459.6	2452.9
7.5°	2459.6	2446.2	2414.8	2423.6	2412.4
10°	2432.6	2416.9	2372.2	2365.3	2351.9
12.5°	2399.1	2378.8	2318.1	2304.8	2280.0
15°	2358.6	2333.8	2257.6	2215.0	2192.6
17.5°	2311.5	2275.5	2181.2	2131.9	2096.0
20°	2257.6	2212.6	2100.5	2044.5	1995.0
22.5°	2199.3	2147.6	2017.4	1941.2	1907.6
25°	2141.0	2069.1	1921.0	1829.1	1795.3
27.5°	2071.5	1995.0	1831.2	1725.7	1674.1
30°	1997.4	1911.9	1732.4	1618.1	1557.4
32.5°	1925.5	1822.2	1638.4	1503.6	1447.4
35°	1844.8	1730.3	1532.9	1391.4	1341.9
37.5°	1766.2	1642.6	1434.1	1279.1	1223.1
40°	1683.1	1548.6	1330.7	1171.4	1113.1
42.5°	1597.9	1454.3	1227.6	1061.4	1005.5
45°	1508.1	1357.6	1122.2	962.6	908.8
47.5°	1422.9	1263.6	1021.2	861.7	812.4
50°	1328.6	1169.3	922.4	767.4	720.5
52.5°	1236.4	1068.1	828.1	680.0	637.4
55°	1146.7	971.7	729.3	594.8	552.1
57.5°	1054.8	875.2	641.9	516.2	480.2
60°	960.5	781.0	549.8	435.5	399.5
62.5°	868.6	689.1	471.2	363.6	345.7
65°	774.3	592.4	390.5	314.3	307.4
67.5°	684.5	502.6	314.3	276.0	269.3
70°	590.2	415.2	260.2	237.9	228.8
72.5°	500.5	334.3	217.6	199.8	195.2
75°	412.9	255.7	179.5	163.8	161.7
77.5°	325.5	181.7	141.4	132.4	127.9
80°	244.5	130.2	107.6	98.8	98.8
82.5°	170.5	87.6	74.0	69.5	69.5
85°	96.4	49.3	42.6	42.6	42.6
87.5°	36.0	17.9	17.9	15.7	15.7
90°	0.9	11.7	19.5	24.5	26.3
92.5°	24.5	20.5	23.4	25.4	26.3
95°	63.4	31.2	38.0	43.0	42.0
97.5°	114.3	34.2	49.8	52.8	53.7
100°	172.9	39.1	55.7	63.4	65.4
102.5°	237.3	235.5	57.6	68.3	71.3
105°	296.9	326.3	59.6	70.3	74.2
107.5°	366.3	390.7	61.6	72.3	76.2
110°	432.8	453.2	171.0	73.3	77.1



TEST NUMBER: P905237

CATALOG NUMBER: DFN2DIP-HX2F0-060D040US835-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	495.3	512.8	496.2	75.2	78.2
115°	561.6	578.2	602.7	150.4	80.2
117.5°	619.3	638.8	655.5	515.7	259.8
120°	683.8	698.4	716.0	727.8	595.9
122.5°	738.4	754.1	773.7	779.5	780.5
125°	794.1	806.9	825.4	832.3	835.2
127.5°	844.9	858.6	873.3	883.1	884.0
130°	892.8	908.5	919.1	929.9	929.0
132.5°	941.6	954.4	965.1	973.9	973.0
135°	982.7	998.4	1007.1	1016.9	1015.0
137.5°	1025.6	1037.3	1047.2	1056.9	1054.0
140°	1067.6	1075.5	1086.2	1095.0	1090.1
142.5°	1102.9	1109.7	1122.4	1130.1	1125.3
145°	1140.0	1139.0	1155.5	1162.4	1157.5
147.5°	1172.1	1169.2	1185.8	1190.7	1186.9
150°	1203.4	1196.6	1212.3	1218.1	1213.2
152.5°	1229.8	1222.0	1236.6	1242.5	1235.7
155°	1255.2	1246.5	1258.2	1264.0	1256.2
157.5°	1275.7	1267.9	1276.8	1283.6	1275.7
160°	1293.3	1287.4	1293.3	1299.1	1292.3
162.5°	1308.9	1303.1	1308.0	1314.8	1306.0
165°	1322.6	1316.8	1319.7	1326.5	1319.7
167.5°	1333.4	1327.4	1330.5	1337.3	1328.5
170°	1342.2	1336.3	1338.2	1345.1	1336.3
172.5°	1348.0	1342.2	1344.2	1351.0	1342.2
175°	1352.8	1346.0	1348.0	1354.8	1345.1
177.5°	1354.8	1348.0	1349.0	1355.9	1347.1
180°	1350.0	1350.0	1350.0	1350.0	1350.0

TEST NUMBER: P905237

CATALOG NUMBER: DFN2DIP-HX2F0-060D040US835-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.71	14.60	14.62	15.52	16.70	9.70	10.58	10.60	11.50	12.68
	3H	15.37	16.16	16.29	17.09	18.30	10.87	11.66	11.79	12.60	13.80
	4H	15.96	16.71	16.90	17.65	18.86	11.31	12.06	12.25	13.00	14.21
	6H	16.37	17.06	17.31	18.00	19.23	11.62	12.31	12.57	13.25	14.48
	8H	16.49	17.14	17.44	18.10	19.32	11.71	12.36	12.66	13.32	14.55
	12H	16.54	17.16	17.50	18.11	19.36	11.74	12.37	12.70	13.32	14.57
4H	2H	13.73	14.48	14.68	15.42	16.63	10.28	11.03	11.22	11.97	13.18
	3H	15.54	16.16	16.49	17.13	18.36	11.62	12.24	12.57	13.21	14.44
	4H	16.21	16.78	17.17	17.74	19.00	12.16	12.72	13.12	13.68	14.94
	6H	16.71	17.20	17.68	18.18	19.43	12.56	13.05	13.53	14.03	15.29
	8H	16.87	17.33	17.85	18.30	19.57	12.68	13.13	13.65	14.11	15.38
	12H	16.96	17.36	17.95	18.36	19.63	12.74	13.15	13.73	14.14	15.41
8H	4H	16.18	16.64	17.16	17.62	18.88	12.42	12.88	13.40	13.86	15.12
	6H	16.72	17.10	17.72	18.12	19.38	12.92	13.30	13.92	14.32	15.58
	8H	16.92	17.25	17.93	18.26	19.55	13.10	13.43	14.11	14.44	15.72
	12H	17.05	17.34	18.06	18.34	19.67	13.21	13.50	14.22	14.50	15.83
12H	4H	16.14	16.55	17.13	17.54	18.81	12.43	12.84	13.42	13.83	15.11
	6H	16.70	17.03	17.71	18.04	19.32	12.96	13.30	13.97	14.30	15.59
	8H	16.90	17.19	17.91	18.20	19.53	13.16	13.45	14.17	14.45	15.79