

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P907883

Luminaire Tested: DFN2DIP-HX2F0-020D040US840-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P907883
REPORT IS A COMBINATION OF REPORTS P900691 AND P897595
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX2F0-020D040US840-FLONL
Description: 2 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5998.6 lumens
Efficiency: N/A
Efficacy: 134.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 1.99' x L: 2.3' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 44.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P907883
CATALOG NUMBER: DFN2DIP-HX2F0-020D040US840-FLLONL

Luminous Intensity Polar Plot

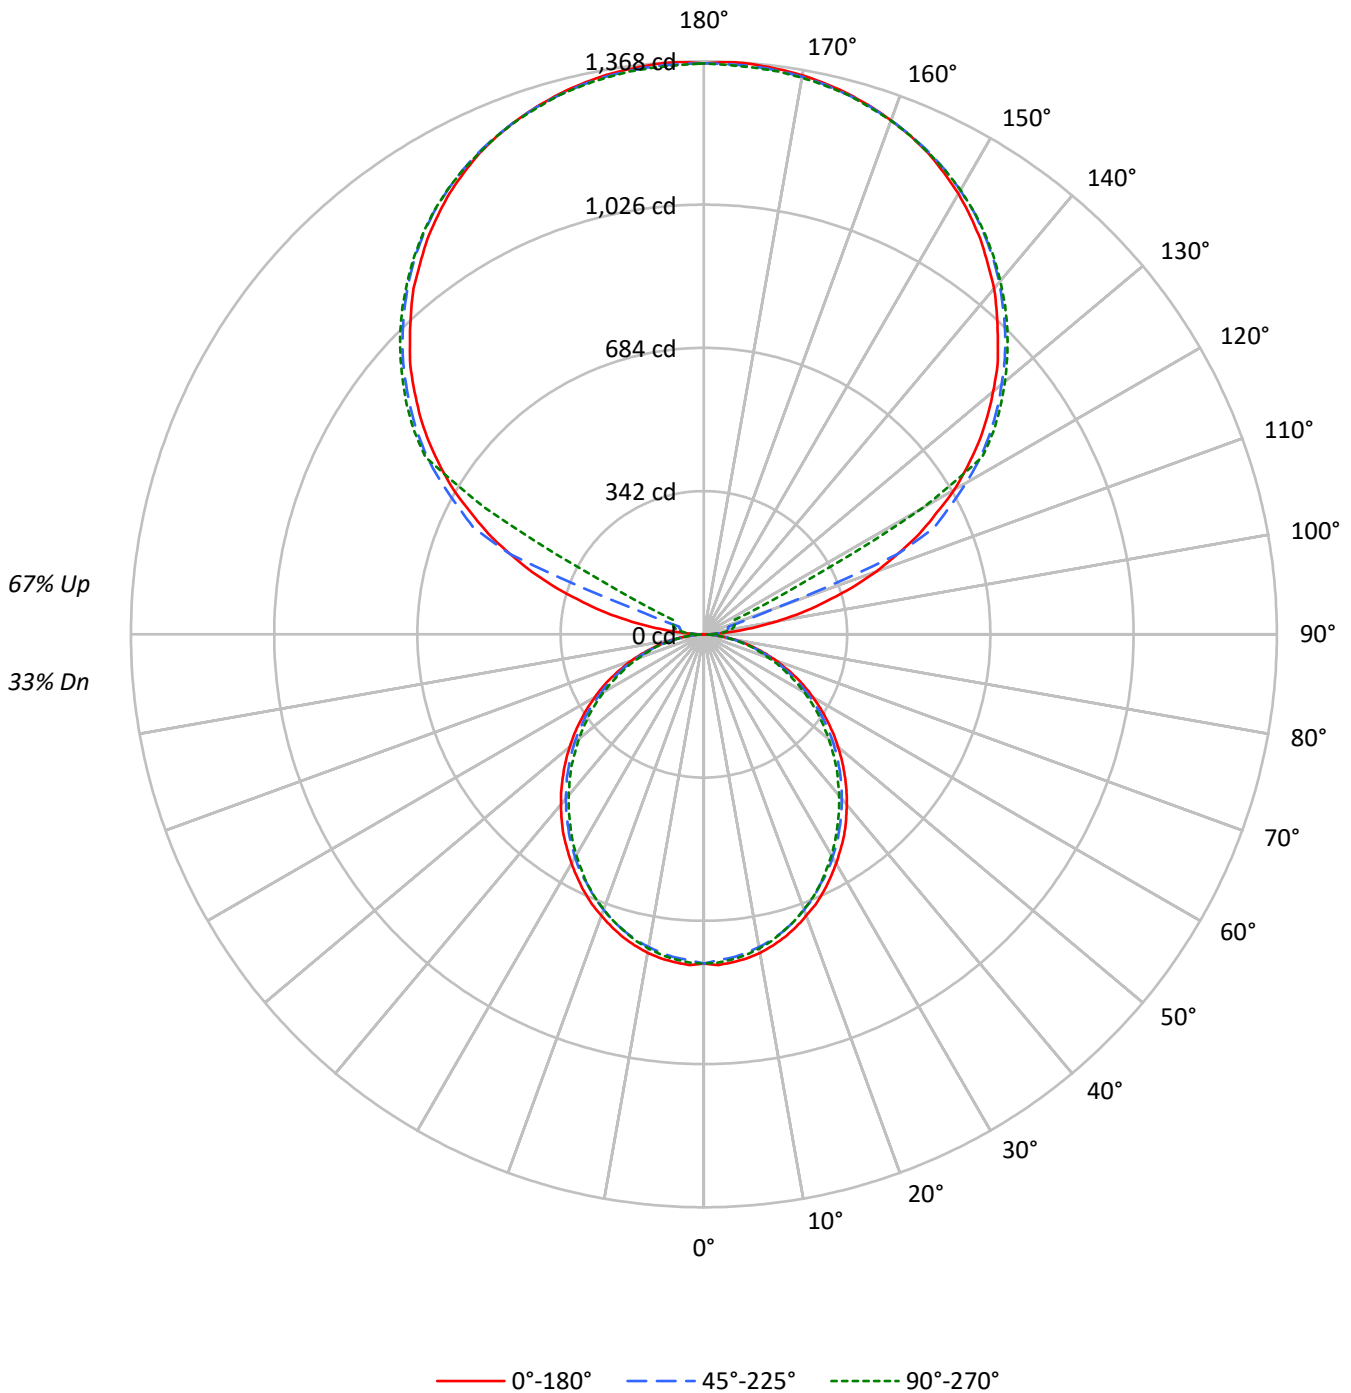



TEST NUMBER: P907883

CATALOG NUMBER: DFN2DIP-HX2F0-020D040US840-FLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	103	103	103	103	93	93	93	93	74	74	74	57	57	57	41	41	41	33				33
1	94	90	86	83	85	81	78	75	65	63	61	50	48	47	36	35	34	28				28
2	86	78	72	67	77	71	66	62	57	53	50	44	41	39	32	30	29	24				24
3	78	69	62	56	70	62	56	51	50	46	42	39	36	33	28	26	25	20				20
4	71	61	53	47	64	55	49	43	44	40	36	34	31	28	25	23	21	17				17
5	65	54	46	40	59	49	42	37	40	35	31	31	27	25	23	20	18	15				15
6	60	48	41	35	54	44	37	32	36	31	27	28	24	21	20	18	16	13				13
7	56	44	36	30	50	40	33	28	32	27	23	25	22	19	19	16	14	12				12
8	51	39	32	27	46	36	29	25	29	24	21	23	19	17	17	15	13	10				10
9	48	36	29	24	43	33	26	22	27	22	19	21	18	15	16	13	12	9				9
10	45	33	26	21	40	30	24	20	25	20	17	19	16	14	15	12	11	9				9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1852	1852	1852
5°	1852	1821	1835
10°	1834	1793	1806
15°	1804	1759	1764
20°	1765	1713	1721
25°	1725	1660	1672
30°	1677	1610	1610
35°	1631	1552	1545
40°	1574	1493	1483
45°	1518	1433	1419
50°	1456	1371	1346
55°	1391	1299	1277
60°	1318	1214	1199
65°	1237	1126	1107
70°	1135	1017	1007
75°	994	887	910
80°	823	723	734
85°	558	454	455

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 1518 cd/sqm



TEST NUMBER: P907883

CATALOG NUMBER: DFN2DIP-HX2F0-020D040US840-FLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	74.0	1.2
10°-20°	208.1	3.5
20°-30°	305.8	5.1
30°-40°	355.2	5.9
40°-50°	354.8	5.9
50°-60°	309.4	5.2
60°-70°	228.7	3.8
70°-80°	129.4	2.2
80°-90°	36.6	0.6
90°-100°	44.9	0.7
100°-110°	167.6	2.8
110°-120°	444.4	7.4
120°-130°	737.1	12.3
130°-140°	783.0	13.1
140°-150°	727.7	12.1
150°-160°	585.1	9.8
160°-170°	377.0	6.3
170°-180°	129.8	2.2
0°-30°	587.9	9.8
0°-40°	943.2	15.7
0°-60°	1607.3	26.8
0°-90°	2001.9	33.4
90°-120°	656.9	11.0
90°-150°	2904.8	48.4
90°-180°	3997.0	66.6
0°-180°	5998.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	786	786	786	786	786	
5°	786	783	775	781	779	75
15°	748	744	734	737	733	211
25°	677	671	658	660	658	312
35°	584	577	564	560	556	365
45°	475	470	459	450	447	367
55°	360	355	346	337	333	322
65°	243	238	231	224	220	240
75°	127	126	122	117	119	135
85°	31	30	30	27	26	35
90°	1	12	20	25	27	5
95°	64	32	38	43	42	76
105°	300	330	60	71	75	320
115°	567	584	609	152	81	558
125°	802	815	834	840	843	715
135°	992	1008	1017	1027	1025	767
145°	1151	1150	1167	1174	1169	720
155°	1268	1259	1271	1276	1269	584
165°	1336	1330	1333	1340	1333	377
175°	1366	1359	1361	1368	1358	130
180°	1363	1363	1363	1363	1363	



TEST NUMBER: P907883

CATALOG NUMBER: DFN2DIP-HX2F0-020D040US840-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	785.9	785.9	785.9	785.9	785.9
2.5°	790.4	786.7	778.3	785.9	784.5
5°	785.9	782.9	774.6	780.6	779.1
7.5°	780.6	776.1	767.8	773.9	772.3
10°	772.3	767.1	758.0	764.0	761.7
12.5°	760.9	756.5	747.4	751.1	749.6
15°	748.1	743.7	733.8	736.8	733.1
17.5°	732.3	727.8	717.9	721.6	717.9
20°	714.9	710.3	699.7	702.1	699.0
22.5°	697.5	690.7	680.9	680.9	679.3
25°	677.1	671.1	658.2	659.6	658.2
27.5°	654.4	649.1	639.3	637.1	633.3
30°	631.8	625.7	614.4	612.2	609.0
32.5°	607.5	603.1	591.0	586.4	583.4
35°	584.2	576.6	564.5	560.0	556.1
37.5°	557.7	550.9	538.8	533.5	529.7
40°	530.5	524.4	512.3	505.6	502.5
42.5°	504.0	498.0	485.9	478.4	473.8
45°	475.3	470.1	458.7	450.4	447.4
47.5°	447.4	442.1	430.0	421.6	417.2
50°	417.9	414.1	403.5	392.9	389.2
52.5°	389.2	383.8	374.1	365.8	360.5
55°	359.7	355.2	346.1	337.1	333.3
57.5°	330.2	326.5	316.6	307.6	304.5
60°	300.7	297.8	287.2	278.8	276.6
62.5°	272.1	266.7	259.2	251.7	248.6
65°	242.6	238.0	230.6	223.7	219.9
67.5°	212.4	208.5	201.8	196.5	193.5
70°	184.4	181.4	174.5	169.3	166.3
72.5°	155.7	152.7	148.9	143.6	141.4
75°	126.9	125.5	121.6	117.1	118.7
77.5°	101.3	98.3	96.6	94.4	92.2
80°	75.6	74.8	73.3	71.0	69.5
82.5°	51.4	51.4	50.7	47.7	47.7
85°	30.9	30.2	29.5	27.2	26.5
87.5°	13.6	12.1	10.6	8.4	7.6
90°	0.9	11.8	19.7	24.7	26.6
92.5°	24.7	20.7	23.6	25.7	26.6
95°	64.0	31.5	38.4	43.4	42.4
97.5°	115.4	34.5	50.3	53.3	54.2
100°	174.6	39.5	56.2	64.0	66.0
102.5°	239.6	237.8	58.2	69.0	72.0
105°	299.8	329.5	60.2	71.0	74.9
107.5°	369.9	394.6	62.2	73.0	77.0
110°	437.1	457.7	172.7	74.0	77.9



TEST NUMBER: P907883

CATALOG NUMBER: DFN2DIP-HX2F0-020D040US840-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	500.2	517.9	501.1	75.9	79.0
115°	567.1	583.9	608.6	151.9	81.0
117.5°	625.4	645.1	662.0	520.8	262.4
120°	690.5	705.3	723.1	735.0	601.8
122.5°	745.7	761.5	781.3	787.2	788.2
125°	801.9	814.9	833.5	840.5	843.4
127.5°	853.2	867.1	881.9	891.8	892.7
130°	901.6	917.5	928.2	939.1	938.2
132.5°	950.9	963.8	974.6	983.5	982.6
135°	992.4	1008.2	1017.0	1026.9	1025.0
137.5°	1035.7	1047.5	1057.5	1067.3	1064.4
140°	1078.1	1086.1	1096.9	1105.8	1100.9
142.5°	1113.8	1120.6	1133.5	1141.2	1136.4
145°	1151.2	1150.2	1166.9	1173.9	1168.9
147.5°	1183.7	1180.7	1197.5	1202.4	1198.6
150°	1215.3	1208.4	1224.3	1230.1	1225.2
152.5°	1241.9	1234.1	1248.8	1254.8	1247.9
155°	1267.6	1258.8	1270.6	1276.5	1268.6
157.5°	1288.3	1280.4	1289.4	1296.3	1288.3
160°	1306.1	1300.1	1306.1	1311.9	1305.0
162.5°	1321.8	1316.0	1320.9	1327.8	1318.9
165°	1335.6	1329.8	1332.7	1339.6	1332.7
167.5°	1346.6	1340.5	1343.6	1350.5	1341.6
170°	1355.4	1349.5	1351.4	1358.4	1349.5
172.5°	1361.3	1355.4	1357.5	1364.3	1355.4
175°	1366.1	1359.3	1361.3	1368.2	1358.4
177.5°	1368.2	1361.3	1362.3	1369.3	1360.4
180°	1363.3	1363.3	1363.3	1363.3	1363.3



TEST NUMBER: P907883
 CATALOG NUMBER: DFN2DIP-HX2F0-020D040US840-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.50	8.23	8.59	9.32	10.81	7.08	7.81	8.17	8.90	10.39
	3H	9.13	9.78	10.22	10.88	12.38	8.67	9.32	9.76	10.42	11.92
	4H	9.69	10.31	10.80	11.41	12.92	9.23	9.85	10.34	10.95	12.46
	6H	10.07	10.64	11.18	11.74	13.26	9.61	10.18	10.72	11.28	12.80
	8H	10.16	10.70	11.28	11.82	13.33	9.70	10.24	10.82	11.36	12.88
	12H	10.19	10.71	11.32	11.82	13.36	9.73	10.25	10.85	11.36	12.90
4H	2H	7.94	8.56	9.05	9.66	11.17	7.60	8.22	8.72	9.32	10.83
	3H	9.76	10.28	10.88	11.40	12.93	9.38	9.90	10.50	11.02	12.55
	4H	10.45	10.93	11.58	12.04	13.59	10.06	10.53	11.18	11.65	13.19
	6H	10.94	11.34	12.07	12.48	14.02	10.54	10.95	11.67	12.08	13.62
	8H	11.07	11.45	12.20	12.58	14.13	10.67	11.05	11.81	12.18	13.74
	12H	11.13	11.47	12.27	12.61	14.17	10.72	11.07	11.87	12.21	13.77
8H	4H	10.63	11.01	11.76	12.14	13.69	10.28	10.66	11.41	11.78	13.34
	6H	11.22	11.54	12.38	12.71	14.26	10.87	11.19	12.02	12.36	13.91
	8H	11.43	11.70	12.58	12.85	14.42	11.07	11.35	12.23	12.49	14.07
	12H	11.54	11.78	12.70	12.92	14.53	11.17	11.41	12.33	12.55	14.16
12H	4H	10.60	10.95	11.75	12.09	13.65	10.26	10.61	11.41	11.74	13.30
	6H	11.25	11.52	12.41	12.67	14.24	10.91	11.18	12.06	12.33	13.90
	8H	11.46	11.71	12.63	12.85	14.46	11.12	11.36	12.28	12.51	14.11