

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P907960

Luminaire Tested: DFN2DIP-HX2F0-060D030US840-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P907960
REPORT IS A COMBINATION OF REPORTS P899170 AND P896039
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX2F0-060D030US840-RLLFLL
Description: 2 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7831.5 lumens
Efficiency: N/A
Efficacy: 96.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 1.99' x L: 2.3' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 81.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9971
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P907960

CATALOG NUMBER: DFN2DIP-HX2F0-060D030US840-RLLFLL

Luminous Intensity Polar Plot

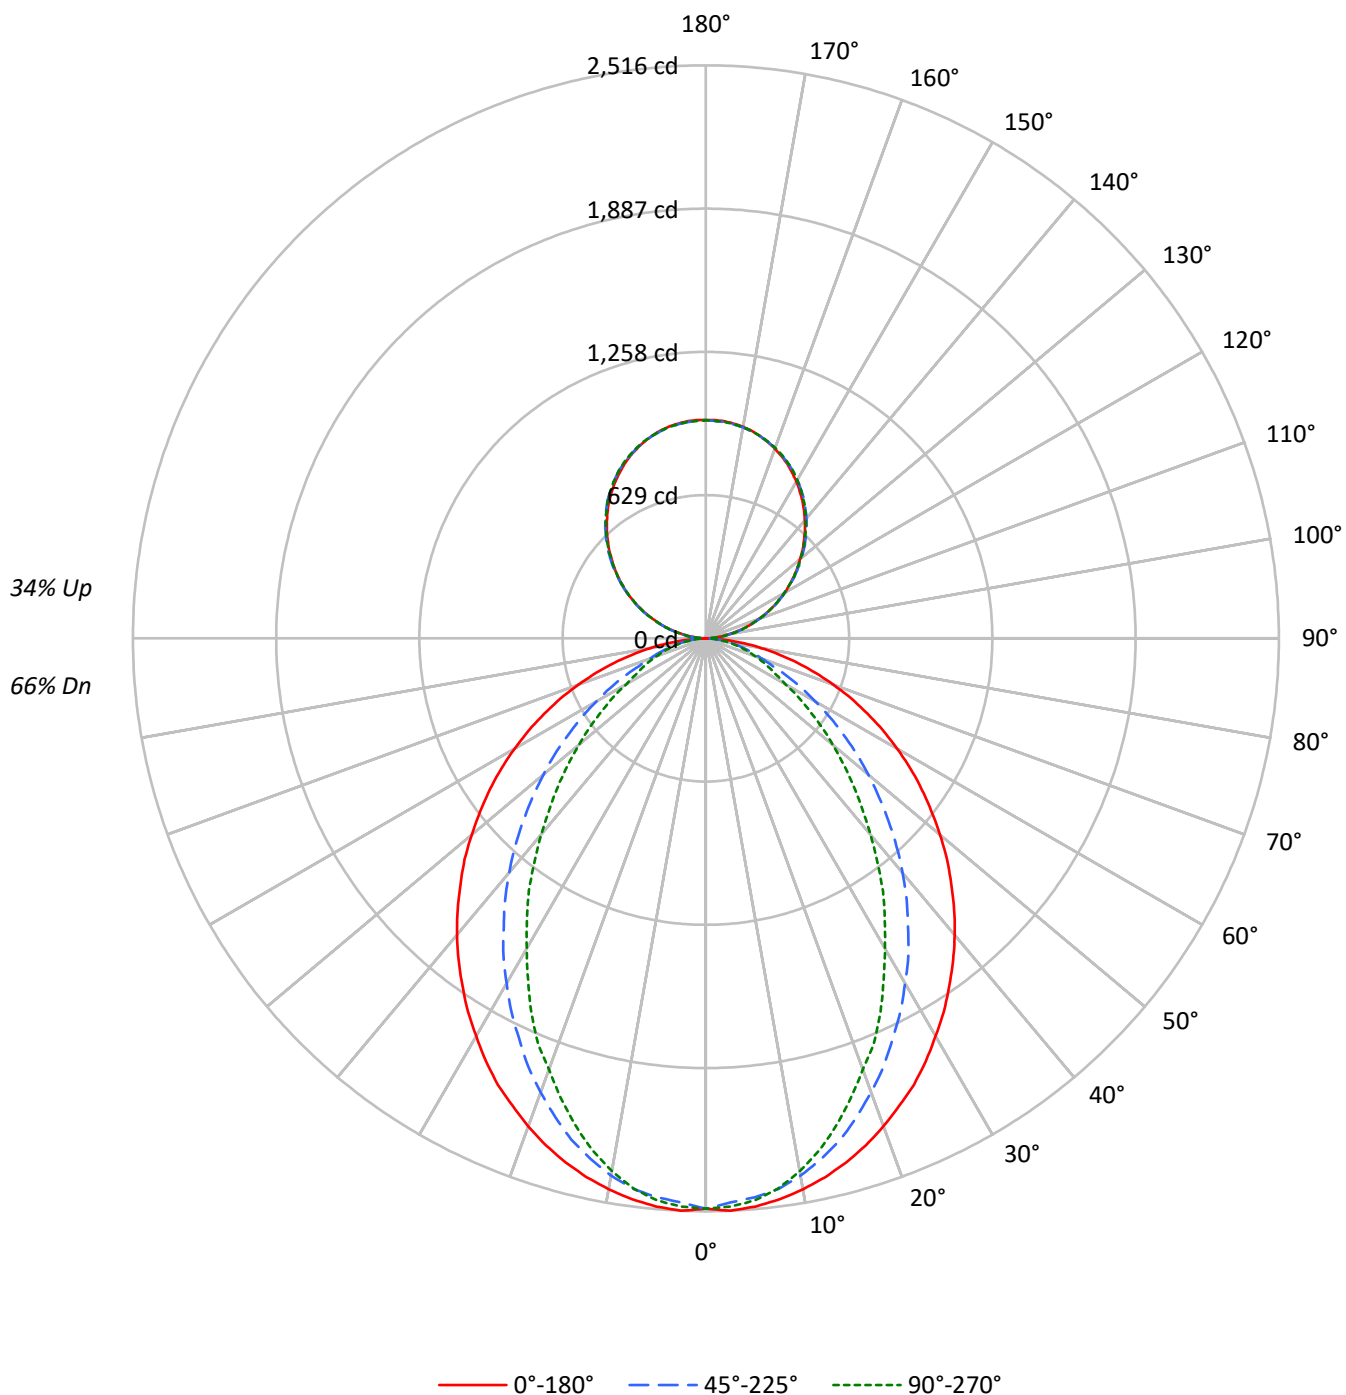

TEST NUMBER: P907960

CATALOG NUMBER: DFN2DIP-HX2F0-060D030US840-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	111	111	111	111	104	104	104	104	92	92	92	81	81	81	71	71	71
1	102	98	94	91	96	92	89	86	82	79	77	72	70	69	63	62	61
2	93	86	80	75	88	81	76	72	72	68	65	64	61	58	57	54	52
3	86	76	69	63	80	72	66	61	65	59	55	57	53	50	51	48	45
4	79	68	60	54	74	65	58	52	58	52	48	52	47	44	46	42	40
5	73	61	53	47	68	58	51	45	52	46	42	47	42	38	42	38	35
6	67	55	47	41	63	52	45	40	47	41	37	42	38	34	38	34	31
7	62	50	42	37	59	48	40	35	43	37	33	39	34	30	35	31	28
8	58	46	38	33	55	44	37	32	40	34	29	36	31	27	32	28	25
9	54	42	35	29	51	40	33	29	36	31	27	33	28	25	30	26	23
10	51	39	31	27	48	37	30	26	34	28	24	31	26	23	28	24	21

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5900	5900	5900
5°	5901	5793	5833
10°	5833	5665	5632
15°	5743	5464	5329
20°	5627	5193	4961
25°	5509	4892	4605
30°	5353	4584	4158
35°	5200	4255	3765
40°	5044	3915	3317
45°	4863	3541	2912
50°	4675	3164	2516
55°	4478	2764	2137
60°	4250	2347	1749
65°	3987	1925	1562
70°	3667	1531	1399
75°	3265	1323	1252
80°	2687	1072	1054
85°	1758	661	738

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 4863 cd/sqm

TEST NUMBER: P907960

CATALOG NUMBER: DFN2DIP-HX2F0-060D030US840-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	234.7	3.0
10°-20°	644.3	8.2
20°-30°	904.6	11.6
30°-40°	986.1	12.6
40°-50°	906.3	11.6
50°-60°	711.7	9.1
60°-70°	463.3	5.9
70°-80°	238.5	3.0
80°-90°	63.6	0.8
90°-100°	59.3	0.8
100°-110°	188.4	2.4
110°-120°	322.4	4.1
120°-130°	424.0	5.4
130°-140°	475.9	6.1
140°-150°	466.7	6.0
150°-160°	391.5	5.0
160°-170°	259.6	3.3
170°-180°	90.7	1.2
0°-30°	1783.6	22.8
0°-40°	2769.6	35.4
0°-60°	4387.7	56.0
0°-90°	5153.0	65.8
90°-120°	570.1	7.3
90°-150°	1936.6	24.7
90°-180°	2678.0	34.2
0°-180°	7831.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2504	2504	2504	2504	2504	
5°	2504	2493	2463	2484	2477	237
15°	2382	2357	2280	2237	2214	671
25°	2162	2090	1940	1847	1813	994
35°	1863	1747	1548	1405	1355	1166
45°	1523	1371	1133	972	918	1176
55°	1158	981	736	601	558	1035
65°	782	598	394	317	310	775
75°	417	258	181	165	163	441
85°	97	50	43	43	43	112
90°	1	10	28	27	28	8
95°	42	50	52	52	50	47
105°	174	176	178	179	179	184
115°	324	328	327	326	324	320
125°	471	478	475	473	472	420
135°	609	618	619	618	616	470
145°	739	745	749	750	747	462
155°	845	847	850	854	851	389
165°	919	918	918	924	920	259
175°	956	954	952	958	953	91
180°	958	958	958	958	958	

TEST NUMBER: P907960

CATALOG NUMBER: DFN2DIP-HX2F0-060D030US840-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2504.3	2504.3	2504.3	2504.3	2504.3
2.5°	2515.6	2504.3	2479.2	2502.0	2497.5
5°	2504.3	2493.0	2463.4	2483.9	2477.1
7.5°	2483.9	2470.3	2438.6	2447.5	2436.2
10°	2456.6	2440.7	2395.6	2388.6	2375.1
12.5°	2422.8	2402.3	2341.0	2327.5	2302.5
15°	2381.9	2356.8	2279.9	2236.9	2214.2
17.5°	2334.3	2297.9	2202.7	2152.9	2116.7
20°	2279.9	2234.4	2121.2	2064.7	2014.7
22.5°	2221.0	2168.8	2037.3	1960.4	1926.4
25°	2162.1	2089.5	1940.0	1847.1	1813.0
27.5°	2091.9	2014.7	1849.3	1742.7	1690.6
30°	2017.1	1930.8	1749.5	1634.1	1572.8
32.5°	1944.5	1840.2	1654.6	1518.4	1461.7
35°	1863.0	1747.4	1548.0	1405.1	1355.1
37.5°	1783.6	1658.8	1448.2	1291.7	1235.2
40°	1699.7	1563.9	1343.8	1183.0	1124.1
42.5°	1613.7	1468.6	1239.7	1071.9	1015.4
45°	1523.0	1371.0	1133.3	972.1	917.8
47.5°	1436.9	1276.1	1031.3	870.2	820.4
50°	1341.7	1180.8	931.5	775.0	727.6
52.5°	1248.6	1078.6	836.3	686.7	643.7
55°	1158.0	981.3	736.5	600.7	557.5
57.5°	1065.2	883.8	648.2	521.3	484.9
60°	970.0	788.7	555.2	439.8	403.4
62.5°	877.2	695.9	475.8	367.2	349.1
65°	781.9	598.2	394.4	317.4	310.4
67.5°	691.3	507.6	317.4	278.7	272.0
70°	596.0	419.3	262.8	240.2	231.1
72.5°	505.4	337.6	219.7	201.8	197.1
75°	417.0	258.2	181.3	165.4	163.3
77.5°	328.7	183.5	142.8	133.7	129.2
80°	246.9	131.5	108.7	99.8	99.8
82.5°	172.2	88.5	74.7	70.2	70.2
85°	97.4	49.8	43.0	43.0	43.0
87.5°	36.4	18.1	18.1	15.9	15.9
90°	0.9	10.4	28.3	26.6	27.5
92.5°	17.9	24.2	25.1	26.0	26.0
95°	42.2	50.3	51.7	51.7	50.3
97.5°	70.2	77.7	80.9	80.9	80.9
100°	102.5	109.2	111.5	111.5	110.7
102.5°	136.6	141.6	144.7	145.6	144.7
105°	173.9	176.2	177.9	179.4	179.4
107.5°	210.9	214.3	214.3	214.9	210.9
110°	246.7	251.4	251.4	251.4	249.0

TEST NUMBER: P907960

CATALOG NUMBER: DFN2DIP-HX2F0-060D030US840-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	285.4	290.3	289.4	287.1	285.4
115°	323.6	328.1	326.7	325.9	323.6
117.5°	361.3	367.7	363.7	361.3	359.0
120°	399.5	405.9	399.5	399.5	396.9
122.5°	434.1	442.2	438.2	435.9	434.1
125°	470.6	477.8	475.4	472.8	472.0
127.5°	506.0	515.0	511.9	508.4	506.0
130°	539.3	549.7	548.3	546.5	543.3
132.5°	576.5	584.6	585.2	581.2	578.9
135°	608.6	617.5	619.4	618.4	616.1
137.5°	644.4	651.7	653.1	652.6	649.0
140°	675.9	683.2	687.2	687.2	684.0
142.5°	708.3	715.5	717.8	718.7	715.5
145°	738.9	744.7	749.3	750.1	747.0
147.5°	766.4	773.6	777.0	778.5	775.3
150°	794.7	799.6	802.7	805.4	802.7
152.5°	819.8	824.7	828.7	831.9	828.7
155°	845.0	847.2	849.8	853.8	851.3
157.5°	866.6	868.3	869.8	875.6	871.5
160°	886.0	887.7	888.6	893.4	890.0
162.5°	903.8	903.8	904.7	910.2	906.2
165°	919.2	918.3	918.3	924.0	920.0
167.5°	933.0	930.4	930.4	936.1	932.1
170°	943.4	941.1	940.3	946.0	941.1
172.5°	950.6	948.4	947.5	953.2	948.4
175°	956.4	954.1	952.4	958.2	953.2
177.5°	959.6	957.3	955.5	960.5	955.5
180°	958.2	958.2	958.2	958.2	958.2

TEST NUMBER: P907960

CATALOG NUMBER: DFN2DIP-HX2F0-060D030US840-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	14.54	15.52	15.35	16.35	17.38	10.52	11.50	11.34	12.33	13.36
	3H	16.20	17.08	17.03	17.92	18.98	11.70	12.58	12.53	13.42	14.48
	4H	16.80	17.62	17.65	18.47	19.54	12.15	12.97	12.99	13.82	14.89
	6H	17.21	17.97	18.07	18.83	19.91	12.46	13.22	13.32	14.08	15.16
	8H	17.33	18.05	18.19	18.93	20.01	12.55	13.27	13.42	14.15	15.23
	12H	17.38	18.07	18.26	18.94	20.05	12.59	13.28	13.46	14.15	15.25
4H	2H	14.57	15.39	15.42	16.24	17.31	11.12	11.94	11.97	12.79	13.86
	3H	16.38	17.07	17.24	17.95	19.04	12.46	13.15	13.32	14.03	15.12
	4H	17.06	17.68	17.94	18.57	19.68	13.00	13.63	13.88	14.51	15.62
	6H	17.56	18.10	18.45	19.00	20.12	13.41	13.95	14.30	14.85	15.97
	8H	17.73	18.23	18.62	19.13	20.25	13.53	14.04	14.43	14.93	16.06
	12H	17.81	18.26	18.72	19.18	20.31	13.60	14.05	14.51	14.96	16.10
8H	4H	17.04	17.54	17.93	18.44	19.56	13.28	13.78	14.17	14.68	15.81
	6H	17.58	17.99	18.50	18.94	20.06	13.78	14.19	14.70	15.13	16.26
	8H	17.78	18.15	18.71	19.08	20.23	13.96	14.32	14.89	15.26	16.40
	12H	17.91	18.23	18.84	19.16	20.35	14.07	14.39	15.00	15.32	16.51
12H	4H	16.99	17.44	17.90	18.36	19.49	13.29	13.74	14.20	14.66	15.79
	6H	17.55	17.92	18.48	18.86	20.00	13.82	14.19	14.75	15.12	16.27
	8H	17.76	18.09	18.70	19.01	20.21	14.02	14.35	14.95	15.27	16.47