

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P910621

Luminaire Tested: DFN2DIP-HX2F0-020D060US850-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P910621
REPORT IS A COMBINATION OF REPORTS P900712 AND P897595
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX2F0-020D060US850-RLLONL
Description: 2 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8472.8 lumens
Efficiency: N/A
Efficacy: 133.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 1.99' x L: 2.3' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 63.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P910621

CATALOG NUMBER: DFN2DIP-HX2F0-020D060US850-RLLONL

Luminous Intensity Polar Plot

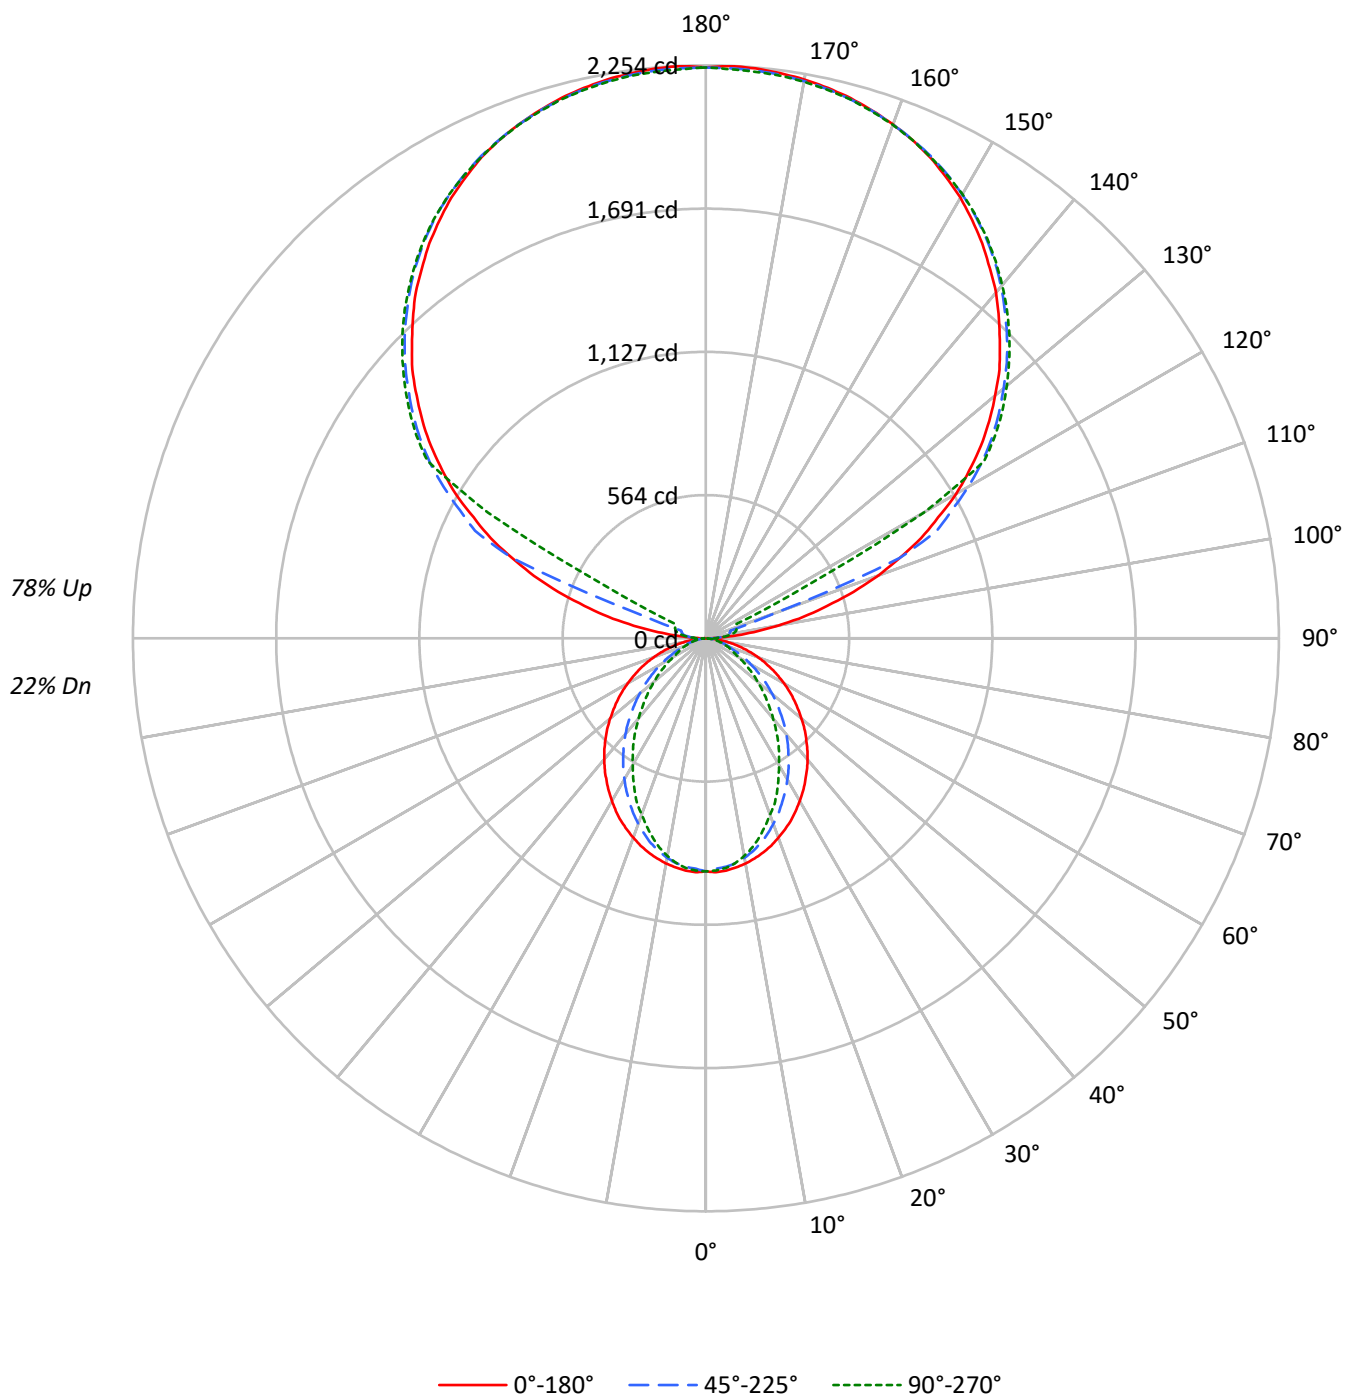

TEST NUMBER: P910621

CATALOG NUMBER: DFN2DIP-HX2F0-020D060US850-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	101	101	101	101	89	89	89	89	68	68	68	49	49	49	31	31	31
1	92	88	84	81	81	78	75	72	60	58	56	43	42	41	27	27	26
2	84	77	71	66	74	68	64	60	52	49	47	38	36	34	24	23	22
3	76	68	61	55	68	60	55	50	46	43	39	34	31	29	22	20	19
4	70	60	52	47	62	53	47	42	41	37	34	30	27	25	20	18	17
5	64	53	46	40	57	48	41	36	37	32	29	27	24	22	18	16	15
6	59	48	40	35	52	43	36	31	33	29	25	24	21	19	16	14	13
7	54	43	35	30	48	38	32	27	30	25	22	22	19	17	15	13	12
8	50	39	32	27	45	35	29	24	27	23	20	20	17	15	14	12	10
9	47	35	28	23	42	32	26	21	25	20	17	19	16	13	12	11	9
10	44	32	25	21	39	29	23	19	23	19	16	17	14	12	12	10	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2160	2160	2160
5°	2160	2120	2135
10°	2135	2074	2062
15°	2102	2000	1951
20°	2060	1901	1816
25°	2017	1791	1686
30°	1960	1678	1522
35°	1903	1558	1378
40°	1846	1433	1214
45°	1780	1296	1066
50°	1712	1158	921
55°	1639	1012	782
60°	1556	859	640
65°	1459	705	572
70°	1342	561	512
75°	1195	484	458
80°	984	392	385
85°	643	241	270

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2053 cd/sqm

TEST NUMBER: P910621

CATALOG NUMBER: DFN2DIP-HX2F0-020D060US850-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	85.9	1.0
10°-20°	235.8	2.8
20°-30°	331.1	3.9
30°-40°	361.0	4.3
40°-50°	331.8	3.9
50°-60°	260.6	3.1
60°-70°	169.6	2.0
70°-80°	87.3	1.0
80°-90°	26.2	0.3
90°-100°	74.1	0.9
100°-110°	276.0	3.3
110°-120°	732.1	8.6
120°-130°	1214.2	14.3
130°-140°	1289.8	15.2
140°-150°	1198.7	14.1
150°-160°	963.8	11.4
160°-170°	621.0	7.3
170°-180°	213.7	2.5
0°-30°	652.9	7.7
0°-40°	1013.8	12.0
0°-60°	1606.2	19.0
0°-90°	1889.3	22.3
90°-120°	1082.2	12.8
90°-150°	4785.0	56.5
90°-180°	6583.0	77.7
0°-180°	8472.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	917	917	917	917	917	
5°	917	913	902	909	907	87
15°	872	863	834	819	811	246
25°	792	765	710	676	664	364
35°	682	640	567	514	496	427
45°	558	502	415	356	336	431
55°	424	359	270	220	204	379
65°	286	219	144	116	114	284
75°	153	94	66	61	60	161
85°	36	18	16	16	16	41
90°	2	20	32	41	44	8
95°	106	52	63	72	70	125
105°	494	543	99	117	124	528
115°	934	962	1003	250	133	920
125°	1321	1342	1373	1384	1389	1178
135°	1635	1661	1675	1692	1688	1263
145°	1896	1895	1922	1934	1926	1186
155°	2088	2074	2093	2103	2090	962
165°	2200	2190	2195	2207	2195	622
175°	2250	2239	2242	2254	2238	214
180°	2246	2246	2246	2246	2246	

TEST NUMBER: P910621

CATALOG NUMBER: DFN2DIP-HX2F0-020D060US850-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	916.7	916.7	916.7	916.7	916.7
2.5°	920.8	916.7	907.5	915.9	914.3
5°	916.7	912.6	901.7	909.3	906.7
7.5°	909.3	904.3	892.6	896.0	891.7
10°	899.3	893.4	876.9	874.3	869.5
12.5°	886.9	879.3	856.9	852.0	842.8
15°	871.9	862.7	834.5	818.8	810.6
17.5°	854.5	841.2	806.4	788.1	774.9
20°	834.5	817.9	776.5	755.8	737.5
22.5°	813.0	793.9	745.8	717.6	705.2
25°	791.5	764.9	710.1	676.2	663.6
27.5°	765.8	737.5	676.9	637.9	618.8
30°	738.4	706.8	640.4	598.2	575.7
32.5°	711.8	673.6	605.6	555.8	535.1
35°	681.9	639.7	566.7	514.4	496.1
37.5°	652.9	607.2	530.1	472.9	452.1
40°	622.1	572.5	492.0	433.1	411.4
42.5°	590.7	537.6	453.8	392.4	371.7
45°	557.5	501.8	414.9	355.9	335.9
47.5°	526.0	467.1	377.5	318.5	300.3
50°	491.2	432.3	341.0	283.7	266.4
52.5°	457.0	394.8	306.1	251.4	235.7
55°	423.9	359.2	269.6	219.9	204.1
57.5°	389.9	323.5	237.3	190.9	177.6
60°	355.1	288.7	203.3	161.0	147.7
62.5°	321.1	254.7	174.2	134.4	127.8
65°	286.2	219.0	144.4	116.2	113.7
67.5°	253.1	185.8	116.2	102.0	99.6
70°	218.1	153.5	96.2	87.9	84.6
72.5°	185.0	123.5	80.4	73.9	72.2
75°	152.6	94.5	66.3	60.6	59.8
77.5°	120.3	67.2	52.2	48.9	47.2
80°	90.4	48.1	39.8	36.5	36.5
82.5°	63.0	32.4	27.4	25.7	25.7
85°	35.6	18.2	15.7	15.7	15.7
87.5°	13.3	6.7	6.7	5.8	5.8
90°	1.6	19.5	32.4	40.7	43.8
92.5°	40.7	34.2	38.9	42.3	43.8
95°	105.6	51.9	63.3	71.6	69.9
97.5°	190.1	56.9	82.7	87.8	89.4
100°	287.7	65.0	92.6	105.6	108.8
102.5°	394.8	391.7	95.9	113.7	118.7
105°	493.9	542.7	99.1	116.9	123.5
107.5°	609.4	649.9	102.5	120.2	126.8
110°	720.0	753.9	284.5	122.0	128.3

TEST NUMBER: P910621

CATALOG NUMBER: DFN2DIP-HX2F0-020D060US850-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	823.9	853.0	825.4	125.0	130.1
115°	934.3	961.9	1002.6	250.3	133.3
117.5°	1030.2	1062.6	1090.4	857.9	432.2
120°	1137.5	1161.8	1191.2	1210.6	991.2
122.5°	1228.3	1254.4	1287.0	1296.6	1298.4
125°	1321.0	1342.2	1373.1	1384.5	1389.2
127.5°	1405.5	1428.3	1452.8	1469.0	1470.5
130°	1485.2	1511.2	1529.0	1546.9	1545.4
132.5°	1566.5	1587.6	1605.4	1620.0	1618.5
135°	1634.8	1660.8	1675.3	1691.7	1688.3
137.5°	1706.1	1725.6	1742.0	1758.2	1753.4
140°	1776.0	1789.1	1806.9	1821.5	1813.4
142.5°	1834.6	1846.0	1867.1	1880.0	1871.9
145°	1896.4	1894.6	1922.2	1933.7	1925.6
147.5°	1949.8	1945.0	1972.6	1980.7	1974.4
150°	2002.0	1990.5	2016.6	2026.3	2018.2
152.5°	2045.8	2032.8	2057.1	2067.0	2055.5
155°	2088.0	2073.5	2093.0	2102.7	2089.7
157.5°	2122.2	2109.2	2123.8	2135.3	2122.2
160°	2151.5	2141.6	2151.5	2161.1	2149.8
162.5°	2177.3	2167.7	2175.7	2187.2	2172.5
165°	2200.1	2190.5	2195.3	2206.7	2195.3
167.5°	2218.0	2208.2	2213.2	2224.7	2209.9
170°	2232.7	2222.9	2226.2	2237.5	2222.9
172.5°	2242.4	2232.7	2236.0	2247.4	2232.7
175°	2250.5	2239.1	2242.4	2253.7	2237.5
177.5°	2253.7	2242.4	2244.1	2255.5	2240.8
180°	2245.6	2245.6	2245.6	2245.6	2245.6

TEST NUMBER: P910621

CATALOG NUMBER: DFN2DIP-HX2F0-020D060US850-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.26	6.91	7.43	8.05	9.68	2.25	2.89	3.41	4.04	5.66
	3H	7.90	8.47	9.07	9.63	11.27	3.40	3.98	4.58	5.14	6.77
	4H	8.48	9.03	9.66	10.19	11.83	3.83	4.38	5.02	5.54	7.18
	6H	8.87	9.38	10.06	10.54	12.19	4.13	4.63	5.32	5.79	7.44
	8H	8.98	9.46	10.17	10.64	12.28	4.21	4.69	5.40	5.86	7.50
	12H	9.03	9.48	10.22	10.65	12.31	4.24	4.69	5.43	5.86	7.52
4H	2H	6.25	6.80	7.44	7.96	9.60	2.80	3.35	3.99	4.51	6.15
	3H	8.03	8.49	9.23	9.67	11.32	4.12	4.57	5.31	5.76	7.41
	4H	8.70	9.12	9.89	10.29	11.96	4.64	5.06	5.84	6.23	7.90
	6H	9.18	9.54	10.38	10.73	12.39	5.03	5.39	6.23	6.59	8.24
	8H	9.34	9.67	10.54	10.86	12.53	5.15	5.48	6.35	6.67	8.34
	12H	9.41	9.72	10.62	10.91	12.59	5.19	5.50	6.41	6.69	8.37
8H	4H	8.65	8.98	9.85	10.17	11.84	4.89	5.23	6.09	6.41	8.09
	6H	9.18	9.46	10.40	10.69	12.36	5.38	5.66	6.60	6.88	8.56
	8H	9.38	9.62	10.60	10.82	12.52	5.56	5.80	6.78	7.00	8.69
	12H	9.49	9.70	10.72	10.91	12.63	5.65	5.86	6.88	7.07	8.79
12H	4H	8.59	8.90	9.80	10.09	11.77	4.89	5.19	6.10	6.38	8.06
	6H	9.15	9.39	10.38	10.60	12.29	5.42	5.66	6.64	6.87	8.56
	8H	9.35	9.56	10.57	10.76	12.48	5.61	5.82	6.83	7.02	8.74

END OF REPORT