

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P910623

Luminaire Tested: DFN2DIP-HX2F0-030D020US850-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P910623
REPORT IS A COMBINATION OF REPORTS P900673 AND P897595
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX2F0-030D020US850-FLLONL
Description: 2 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5489.6 lumens
Efficiency: N/A
Efficacy: 135.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 1.99' x L: 2.3' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 40.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9951
Total Harmonic Distortion (THDi): 0.07
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P910623

CATALOG NUMBER: DFN2DIP-HX2F0-030D020US850-FLLONL

Luminous Intensity Polar Plot

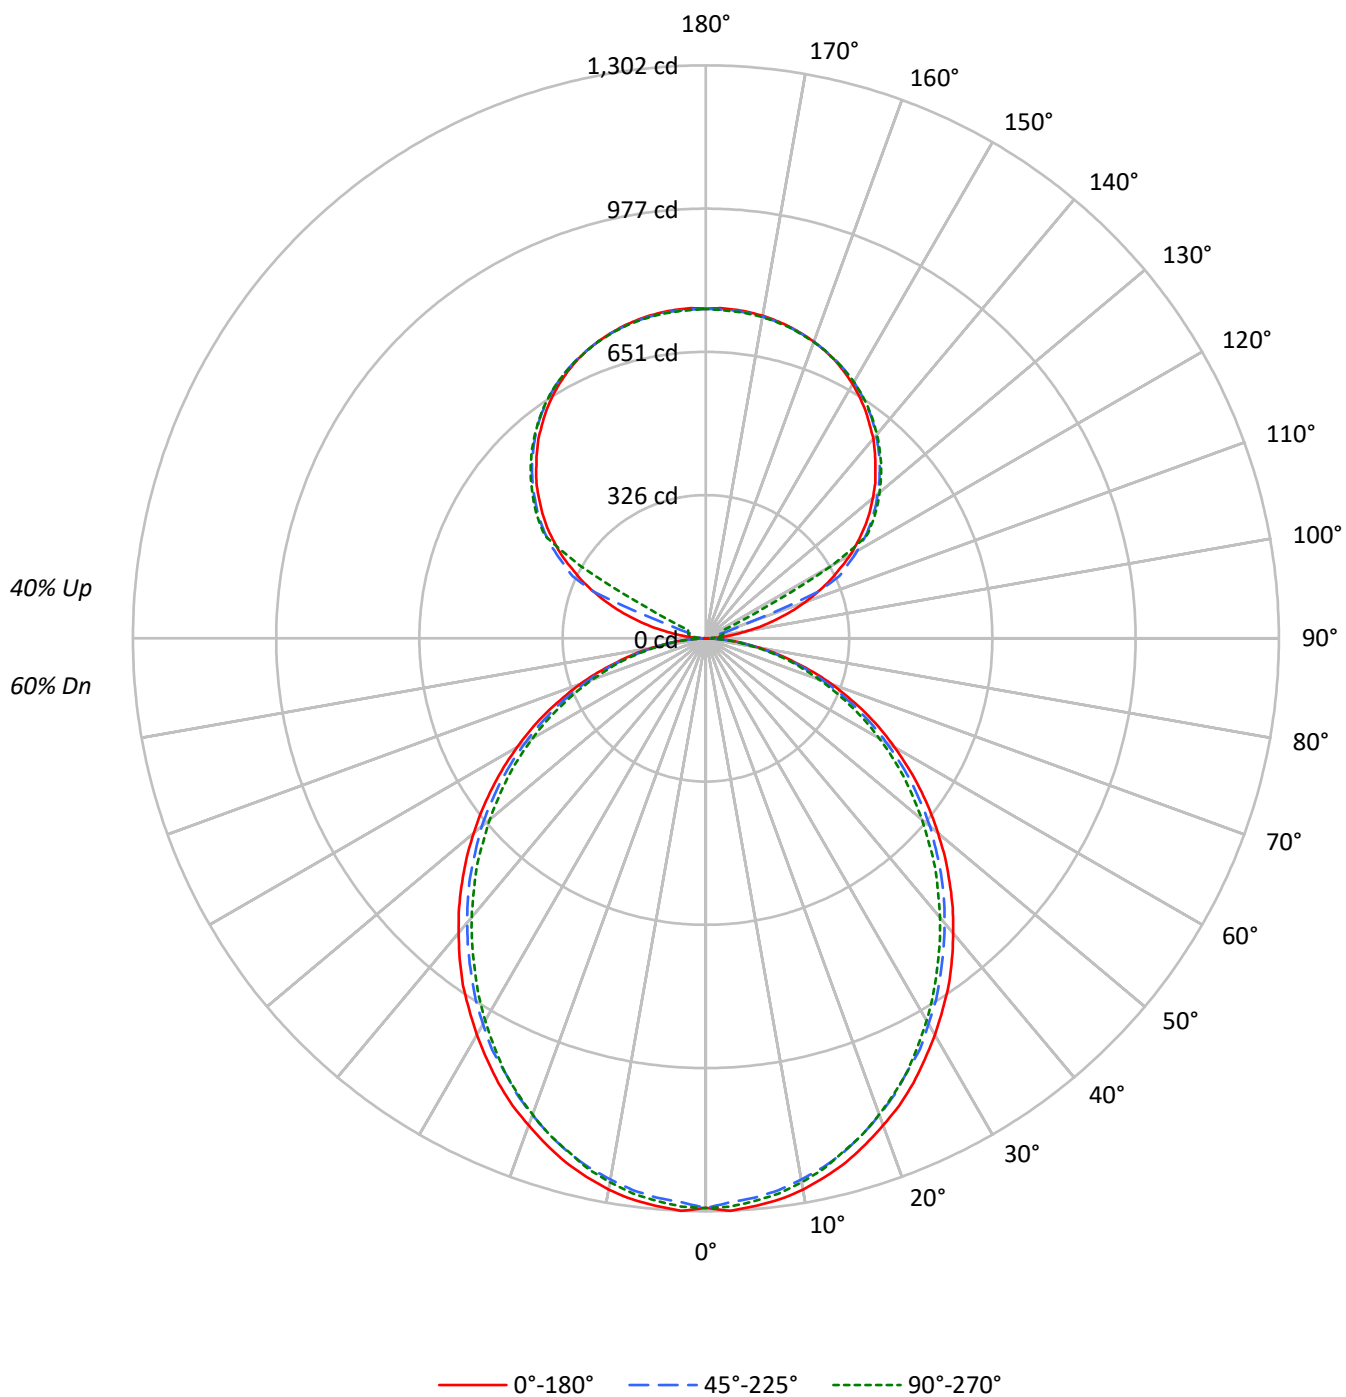

TEST NUMBER: P910623

CATALOG NUMBER: DFN2DIP-HX2F0-030D020US850-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	110	110	110	110	102	102	102	102	89	89	89	77	77	77	65	65	65
1	100	96	92	88	93	90	86	83	78	75	73	67	66	64	58	56	55
2	91	84	77	72	85	78	73	68	68	64	61	59	56	53	51	49	47
3	83	73	66	60	77	69	62	57	60	55	51	52	48	45	45	42	40
4	76	65	57	51	71	61	54	48	54	48	44	47	42	39	40	37	34
5	70	58	50	44	65	55	47	42	48	42	38	42	37	34	36	33	30
6	64	52	44	38	60	49	42	36	43	37	33	38	33	30	33	29	26
7	60	47	39	33	56	44	37	32	39	33	29	35	30	26	30	26	23
8	55	43	35	30	52	40	33	28	36	30	26	32	27	23	28	24	21
9	52	39	32	26	48	37	30	25	33	27	23	29	24	21	26	22	19
10	48	36	29	24	45	34	27	23	30	25	21	27	22	19	24	20	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3050	3050	3050
5°	3050	3000	3022
10°	3021	2953	2976
15°	2971	2897	2906
20°	2906	2822	2835
25°	2842	2734	2754
30°	2762	2652	2653
35°	2686	2556	2545
40°	2593	2459	2443
45°	2500	2361	2338
50°	2399	2258	2217
55°	2292	2139	2105
60°	2171	2000	1975
65°	2038	1853	1823
70°	1869	1676	1658
75°	1637	1462	1499
80°	1355	1190	1210
85°	921	747	749

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2500 cd/sqm

TEST NUMBER: P910623

CATALOG NUMBER: DFN2DIP-HX2F0-030D020US850-FLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	121.8	2.2
10°-20°	342.8	6.2
20°-30°	503.8	9.2
30°-40°	585.2	10.7
40°-50°	584.4	10.6
50°-60°	509.6	9.3
60°-70°	376.7	6.9
70°-80°	213.1	3.9
80°-90°	57.6	1.0
90°-100°	24.7	0.4
100°-110°	92.0	1.7
110°-120°	244.0	4.4
120°-130°	404.8	7.4
130°-140°	429.9	7.8
140°-150°	399.6	7.3
150°-160°	321.3	5.9
160°-170°	207.0	3.8
170°-180°	71.2	1.3
0°-30°	968.5	17.6
0°-40°	1553.6	28.3
0°-60°	2647.7	48.2
0°-90°	3295.1	60.0
90°-120°	360.7	6.6
90°-150°	1595.0	29.1
90°-180°	2194.0	40.0
0°-180°	5489.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1294	1294	1294	1294	1294	
5°	1294	1290	1276	1286	1283	123
15°	1232	1225	1209	1214	1208	347
25°	1115	1106	1084	1087	1084	513
35°	962	950	930	922	916	601
45°	783	774	756	742	737	604
55°	593	585	570	555	549	530
65°	400	392	380	368	362	395
75°	209	207	200	193	196	223
85°	51	50	49	45	44	57
90°	1	6	11	14	15	5
95°	35	17	21	24	23	42
105°	165	181	33	39	41	176
115°	311	321	334	83	44	307
125°	440	447	458	462	463	393
135°	545	554	558	564	563	421
145°	632	632	641	645	642	395
155°	696	691	698	701	697	321
165°	733	730	732	736	732	207
175°	750	746	748	751	746	71
180°	749	749	749	749	749	

TEST NUMBER: P910623

CATALOG NUMBER: DFN2DIP-HX2F0-030D020US850-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1294.5	1294.5	1294.5	1294.5	1294.5
2.5°	1302.1	1295.9	1282.1	1294.5	1292.2
5°	1294.5	1289.7	1275.9	1285.9	1283.4
7.5°	1285.9	1278.5	1264.7	1274.8	1272.2
10°	1272.2	1263.5	1248.6	1258.5	1254.8
12.5°	1253.5	1246.1	1231.2	1237.3	1234.9
15°	1232.3	1225.0	1208.7	1213.7	1207.5
17.5°	1206.1	1198.8	1182.5	1188.7	1182.5
20°	1177.5	1170.1	1152.7	1156.4	1151.5
22.5°	1149.0	1137.8	1121.5	1121.5	1119.0
25°	1115.3	1105.5	1084.3	1086.7	1084.3
27.5°	1077.9	1069.2	1053.1	1049.4	1043.2
30°	1040.7	1030.7	1012.1	1008.3	1003.3
32.5°	1000.9	993.4	973.5	965.9	960.9
35°	962.3	949.9	929.9	922.4	916.1
37.5°	918.7	907.5	887.5	878.8	872.6
40°	873.9	863.9	843.9	832.9	827.9
42.5°	830.3	820.3	800.5	787.9	780.5
45°	783.1	774.3	755.6	741.9	736.9
47.5°	736.9	728.3	708.3	694.6	687.1
50°	688.4	682.1	664.7	647.3	641.1
52.5°	641.1	632.4	616.3	602.5	593.8
55°	592.6	585.1	570.1	555.3	549.1
57.5°	544.0	537.8	521.6	506.6	501.6
60°	495.4	490.5	473.1	459.3	455.7
62.5°	448.1	439.4	427.0	414.5	409.6
65°	399.7	392.1	379.7	368.5	362.3
67.5°	349.9	343.6	332.4	323.7	318.7
70°	303.8	298.8	287.6	278.8	273.9
72.5°	256.5	251.4	245.2	236.5	232.9
75°	209.0	206.7	200.4	193.0	195.5
77.5°	166.8	161.8	159.3	155.6	151.9
80°	124.5	123.2	120.7	117.0	114.6
82.5°	84.6	84.6	83.5	78.4	78.4
85°	51.0	49.8	48.6	44.8	43.6
87.5°	22.4	20.0	17.4	13.8	12.4
90°	0.6	6.5	10.8	13.5	14.6
92.5°	13.5	11.4	13.0	14.1	14.6
95°	35.2	17.3	21.1	23.8	23.3
97.5°	63.3	19.0	27.6	29.3	29.8
100°	95.9	21.6	30.8	35.2	36.3
102.5°	131.6	130.5	31.9	37.9	39.6
105°	164.7	180.9	33.0	38.9	41.1
107.5°	203.2	216.6	34.2	40.0	42.3
110°	240.0	251.3	94.8	40.7	42.8

TEST NUMBER: P910623

CATALOG NUMBER: DFN2DIP-HX2F0-030D020US850-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	274.6	284.3	275.1	41.7	43.4
115°	311.4	320.6	334.3	83.4	44.5
117.5°	343.3	354.2	363.4	286.0	144.1
120°	379.2	387.3	397.0	403.6	330.4
122.5°	409.4	418.1	429.0	432.2	432.8
125°	440.4	447.4	457.7	461.5	463.1
127.5°	468.6	476.1	484.3	489.6	490.2
130°	495.1	503.7	509.7	515.7	515.1
132.5°	522.1	529.2	535.1	540.0	539.5
135°	545.0	553.6	558.4	563.9	562.8
137.5°	568.7	575.2	580.7	586.1	584.4
140°	592.0	596.4	602.3	607.2	604.5
142.5°	611.5	615.4	622.4	626.7	623.9
145°	632.1	631.6	640.8	644.6	641.9
147.5°	650.0	648.3	657.5	660.2	658.1
150°	667.3	663.5	672.2	675.4	672.7
152.5°	681.9	677.6	685.7	689.0	685.1
155°	696.0	691.1	697.7	700.9	696.6
157.5°	707.4	703.1	708.0	711.8	707.4
160°	717.2	713.9	717.2	720.4	716.6
162.5°	725.7	722.5	725.3	729.1	724.2
165°	733.4	730.2	731.7	735.6	731.7
167.5°	739.4	736.0	737.7	741.6	736.6
170°	744.2	740.9	742.0	745.8	740.9
172.5°	747.5	744.2	745.4	749.1	744.2
175°	750.1	746.4	747.5	751.2	745.8
177.5°	751.2	747.5	748.0	751.8	746.9
180°	748.6	748.6	748.6	748.6	748.6

TEST NUMBER: P910623

CATALOG NUMBER: DFN2DIP-HX2F0-030D020US850-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.89	12.85	12.75	13.73	14.85	11.46	12.42	12.33	13.31	14.43
	3H	13.53	14.39	14.41	15.29	16.43	13.07	13.93	13.95	14.83	15.97
	4H	14.10	14.92	15.00	15.82	16.98	13.65	14.46	14.54	15.36	16.52
	6H	14.49	15.24	15.40	16.15	17.32	14.03	14.78	14.94	15.69	16.86
	8H	14.59	15.30	15.50	16.23	17.40	14.13	14.85	15.04	15.77	16.94
	12H	14.63	15.31	15.55	16.23	17.43	14.17	14.85	15.09	15.77	16.96
4H	2H	12.35	13.16	13.25	14.07	15.22	12.01	12.82	12.91	13.73	14.88
	3H	14.20	14.88	15.11	15.81	16.98	13.81	14.49	14.72	15.43	16.60
	4H	14.89	15.51	15.82	16.44	17.64	14.50	15.12	15.42	16.05	17.25
	6H	15.39	15.93	16.33	16.88	18.08	15.00	15.53	15.93	16.48	17.68
	8H	15.53	16.03	16.47	16.98	18.19	15.13	15.63	16.07	16.58	17.79
	12H	15.60	16.05	16.55	17.01	18.23	15.19	15.64	16.15	16.61	17.83
8H	4H	15.09	15.59	16.03	16.54	17.75	14.74	15.24	15.67	16.18	17.40
	6H	15.69	16.11	16.66	17.10	18.31	15.34	15.76	16.31	16.75	17.96
	8H	15.90	16.26	16.87	17.24	18.47	15.54	15.91	16.52	16.89	18.12
	12H	16.02	16.34	16.99	17.31	18.59	15.65	15.97	16.63	16.94	18.22
12H	4H	15.08	15.53	16.03	16.49	17.71	14.73	15.18	15.69	16.15	17.37
	6H	15.72	16.09	16.69	17.06	18.29	15.38	15.75	16.35	16.72	17.95
	8H	15.95	16.27	16.92	17.24	18.52	15.60	15.92	16.58	16.90	18.17