

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P910667

Luminaire Tested: DFN2DIP-HX2F0-050D030US850-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P910667
REPORT IS A COMBINATION OF REPORTS P900687 AND P897595
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX2F0-050D030US850-FLLONL
Description: 2 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8783.3 lumens
Efficiency: N/A
Efficacy: 126.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 1.99' x L: 2.3' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 69.3
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P910667

CATALOG NUMBER: DFN2DIP-HX2F0-050D030US850-FLLONL

Luminous Intensity Polar Plot

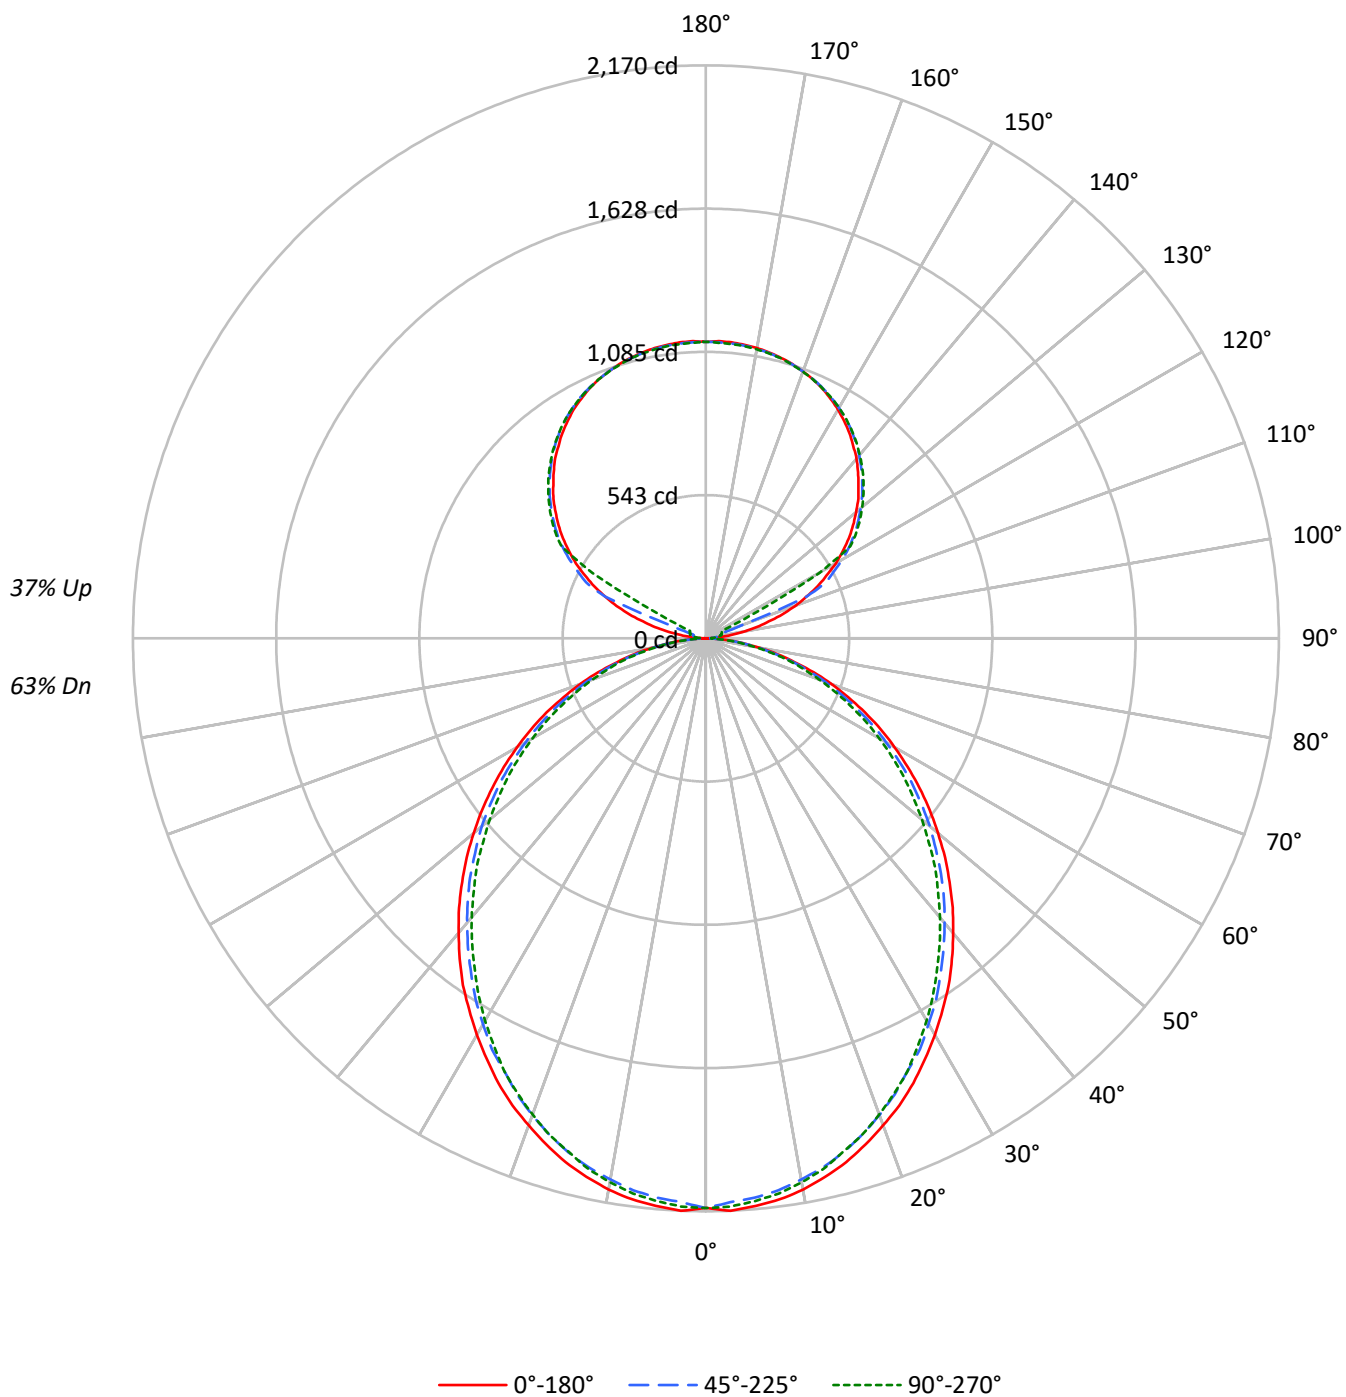

TEST NUMBER: P910667

CATALOG NUMBER: DFN2DIP-HX2F0-050D030US850-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	110	110	110	110	103	103	103	103	90	90	90	78	78	78	68	68	68
1	101	96	92	89	94	90	87	84	79	77	74	69	67	65	60	58	57
2	92	84	78	72	86	79	73	69	69	65	62	61	58	55	53	50	48
3	84	74	66	60	78	70	63	57	61	56	52	54	50	46	47	44	41
4	77	65	57	51	71	62	54	49	55	49	44	48	43	40	42	38	35
5	70	58	50	44	66	55	48	42	49	43	38	43	38	34	38	34	31
6	65	53	44	38	61	50	42	37	44	38	33	39	34	30	34	30	27
7	60	47	39	34	56	45	38	32	40	34	30	35	31	27	31	27	24
8	56	43	35	30	52	41	34	29	37	31	26	33	28	24	29	25	22
9	52	40	32	27	49	37	30	26	34	28	24	30	25	22	27	23	20
10	49	36	29	24	46	34	28	23	31	25	21	28	23	20	25	21	18

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5084	5084	5084
5°	5084	5000	5037
10°	5034	4921	4960
15°	4952	4828	4844
20°	4844	4704	4726
25°	4736	4557	4590
30°	4603	4420	4421
35°	4476	4260	4243
40°	4322	4098	4072
45°	4167	3935	3897
50°	3998	3763	3695
55°	3820	3565	3507
60°	3618	3333	3292
65°	3396	3089	3038
70°	3115	2792	2764
75°	2728	2436	2497
80°	2259	1984	2016
85°	1532	1245	1246

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 4167 cd/sqm

TEST NUMBER: P910667

CATALOG NUMBER: DFN2DIP-HX2F0-050D030US850-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	203.1	2.3
10°-20°	571.4	6.5
20°-30°	839.7	9.6
30°-40°	975.2	11.1
40°-50°	974.0	11.1
50°-60°	849.3	9.7
60°-70°	627.9	7.1
70°-80°	355.2	4.0
80°-90°	95.7	1.1
90°-100°	37.0	0.4
100°-110°	138.0	1.6
110°-120°	366.1	4.2
120°-130°	607.1	6.9
130°-140°	644.9	7.3
140°-150°	599.4	6.8
150°-160°	481.9	5.5
160°-170°	310.5	3.5
170°-180°	106.9	1.2
0°-30°	1614.1	18.4
0°-40°	2589.4	29.5
0°-60°	4412.7	50.2
0°-90°	5491.5	62.5
90°-120°	541.1	6.2
90°-150°	2392.5	27.2
90°-180°	3292.0	37.5
0°-180°	8783.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2158	2158	2158	2158	2158	
5°	2158	2150	2126	2143	2139	205
15°	2054	2042	2014	2023	2012	578
25°	1859	1842	1807	1811	1807	855
35°	1604	1583	1550	1537	1527	1001
45°	1305	1290	1259	1237	1228	1007
55°	988	975	950	925	915	883
65°	666	654	633	614	604	659
75°	348	344	334	322	326	372
85°	85	83	81	75	73	95
90°	1	10	16	20	22	8
95°	53	26	32	36	35	63
105°	247	271	50	58	62	264
115°	467	481	501	125	67	460
125°	660	671	687	692	695	589
135°	817	830	838	846	844	631
145°	948	947	961	967	963	593
155°	1044	1037	1046	1051	1045	481
165°	1100	1095	1098	1103	1098	311
175°	1125	1120	1121	1127	1119	107
180°	1123	1123	1123	1123	1123	

TEST NUMBER: P910667

CATALOG NUMBER: DFN2DIP-HX2F0-050D030US850-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2157.6	2157.6	2157.6	2157.6	2157.6
2.5°	2170.1	2159.8	2136.9	2157.6	2153.7
5°	2157.6	2149.5	2126.5	2143.0	2139.2
7.5°	2143.0	2130.7	2107.9	2124.6	2120.4
10°	2120.4	2105.9	2081.0	2097.5	2091.4
12.5°	2089.1	2076.8	2052.0	2062.3	2058.1
15°	2053.9	2041.6	2014.5	2022.9	2012.5
17.5°	2010.3	1998.0	1970.9	1981.2	1970.9
20°	1962.6	1950.3	1921.2	1927.3	1919.2
22.5°	1915.0	1896.3	1869.2	1869.2	1865.0
25°	1858.9	1842.4	1807.1	1811.1	1807.1
27.5°	1796.6	1782.1	1755.2	1749.0	1738.7
30°	1734.5	1717.8	1686.8	1680.6	1672.3
32.5°	1668.0	1655.7	1622.5	1609.9	1601.6
35°	1603.7	1583.1	1549.8	1537.3	1527.0
37.5°	1531.1	1512.5	1479.2	1464.7	1454.3
40°	1456.6	1439.8	1406.5	1388.0	1379.7
42.5°	1383.9	1367.2	1334.1	1313.2	1300.9
45°	1305.1	1290.5	1259.3	1236.6	1228.2
47.5°	1228.2	1213.7	1180.5	1157.6	1145.3
50°	1147.3	1136.9	1107.9	1078.8	1068.4
52.5°	1068.4	1053.9	1027.0	1004.2	989.7
55°	987.7	975.1	950.2	925.3	915.0
57.5°	906.6	896.3	869.2	844.4	836.0
60°	825.7	817.6	788.5	765.5	759.4
62.5°	746.9	732.4	711.6	690.9	682.6
65°	666.1	653.5	632.8	614.2	603.7
67.5°	583.1	572.6	554.1	539.5	531.1
70°	506.3	497.9	479.2	464.7	456.6
72.5°	427.5	419.1	408.8	394.2	388.0
75°	348.4	344.5	333.9	321.6	325.8
77.5°	278.0	269.6	265.5	259.3	253.2
80°	207.6	205.4	201.2	195.1	190.9
82.5°	141.1	141.1	139.1	130.8	130.8
85°	84.9	83.0	81.0	74.6	72.6
87.5°	37.4	33.3	29.1	22.8	20.7
90°	0.8	9.8	16.2	20.4	21.8
92.5°	20.4	17.1	19.5	21.2	21.8
95°	52.8	26.0	31.6	35.8	34.9
97.5°	95.0	28.5	41.4	43.9	44.7
100°	143.8	32.5	46.4	52.8	54.5
102.5°	197.4	195.8	47.9	56.8	59.3
105°	247.0	271.4	49.6	58.4	61.8
107.5°	304.6	324.9	51.2	60.1	63.4
110°	360.0	376.9	142.2	61.0	64.2

TEST NUMBER: P910667

CATALOG NUMBER: DFN2DIP-HX2F0-050D030US850-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	412.0	426.5	412.8	62.5	65.0
115°	467.1	481.0	501.3	125.1	66.7
117.5°	515.1	531.3	545.2	429.0	216.1
120°	568.7	580.9	595.5	605.3	495.6
122.5°	614.2	627.3	643.6	648.3	649.2
125°	660.5	671.1	686.6	692.2	694.7
127.5°	702.8	714.1	726.4	734.5	735.3
130°	742.6	755.7	764.5	773.4	772.8
132.5°	783.2	793.8	802.7	810.0	809.2
135°	817.3	830.4	837.6	845.8	844.2
137.5°	853.0	862.8	871.0	879.1	876.7
140°	888.0	894.5	903.4	910.7	906.7
142.5°	917.4	923.0	933.6	940.0	936.0
145°	948.2	947.3	961.2	966.8	962.7
147.5°	974.9	972.5	986.3	990.3	987.1
150°	1001.0	995.3	1008.3	1013.1	1009.1
152.5°	1022.8	1016.4	1028.6	1033.5	1027.8
155°	1044.0	1036.8	1046.5	1051.3	1044.9
157.5°	1061.1	1054.7	1062.0	1067.6	1061.1
160°	1075.7	1070.9	1075.7	1080.6	1074.8
162.5°	1088.7	1083.8	1087.9	1093.6	1086.3
165°	1100.0	1095.2	1097.7	1103.3	1097.7
167.5°	1109.0	1104.1	1106.6	1112.3	1105.0
170°	1116.3	1111.4	1113.1	1118.8	1111.4
172.5°	1121.2	1116.3	1118.0	1123.6	1116.3
175°	1125.2	1119.5	1121.2	1126.9	1118.8
177.5°	1126.9	1121.2	1122.1	1127.7	1120.4
180°	1122.9	1122.9	1122.9	1122.9	1122.9

TEST NUMBER: P910667

CATALOG NUMBER: DFN2DIP-HX2F0-050D030US850-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.87	14.85	14.71	15.72	16.80	13.44	14.43	14.28	15.29	16.37
	3H	15.51	16.40	16.36	17.27	18.38	15.05	15.94	15.90	16.81	17.92
	4H	16.09	16.92	16.96	17.80	18.92	15.63	16.46	16.50	17.34	18.46
	6H	16.47	17.25	17.36	18.13	19.26	16.01	16.79	16.90	17.67	18.80
	8H	16.57	17.31	17.46	18.21	19.34	16.12	16.85	17.01	17.76	18.89
	12H	16.62	17.32	17.51	18.22	19.37	16.15	16.85	17.05	17.75	18.91
4H	2H	14.33	15.17	15.21	16.05	17.17	13.99	14.83	14.87	15.71	16.83
	3H	16.18	16.88	17.07	17.79	18.92	15.80	16.50	16.68	17.41	18.54
	4H	16.88	17.52	17.78	18.43	19.58	16.49	17.12	17.38	18.03	19.19
	6H	17.38	17.93	18.29	18.86	20.02	16.98	17.53	17.90	18.47	19.63
	8H	17.52	18.03	18.43	18.96	20.13	17.12	17.64	18.04	18.56	19.74
	12H	17.59	18.05	18.52	19.00	20.18	17.18	17.65	18.12	18.59	19.77
8H	4H	17.08	17.59	17.99	18.52	19.69	16.72	17.24	17.64	18.17	19.34
	6H	17.68	18.11	18.63	19.08	20.25	17.33	17.76	18.27	18.73	19.90
	8H	17.89	18.27	18.84	19.22	20.42	17.53	17.91	18.48	18.87	20.06
	12H	18.01	18.34	18.96	19.29	20.53	17.64	17.97	18.60	18.92	20.17
12H	4H	17.07	17.53	18.00	18.47	19.65	16.72	17.19	17.66	18.13	19.31
	6H	17.71	18.09	18.66	19.05	20.24	17.37	17.75	18.32	18.70	19.90
	8H	17.94	18.27	18.89	19.22	20.46	17.59	17.93	18.55	18.88	20.12