

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P913342

Luminaire Tested: DFN2DIP-HX2F0-020D050US927-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P913342
REPORT IS A COMBINATION OF REPORTS P899181 AND P896039
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX2F0-020D050US927-FLLFLL
Description: 2 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5074.0 lumens
Efficiency: N/A
Efficacy: 94.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 1.99' x L: 2.3' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 53.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P913342

CATALOG NUMBER: DFN2DIP-HX2F0-020D050US927-FLLFLL

Luminous Intensity Polar Plot

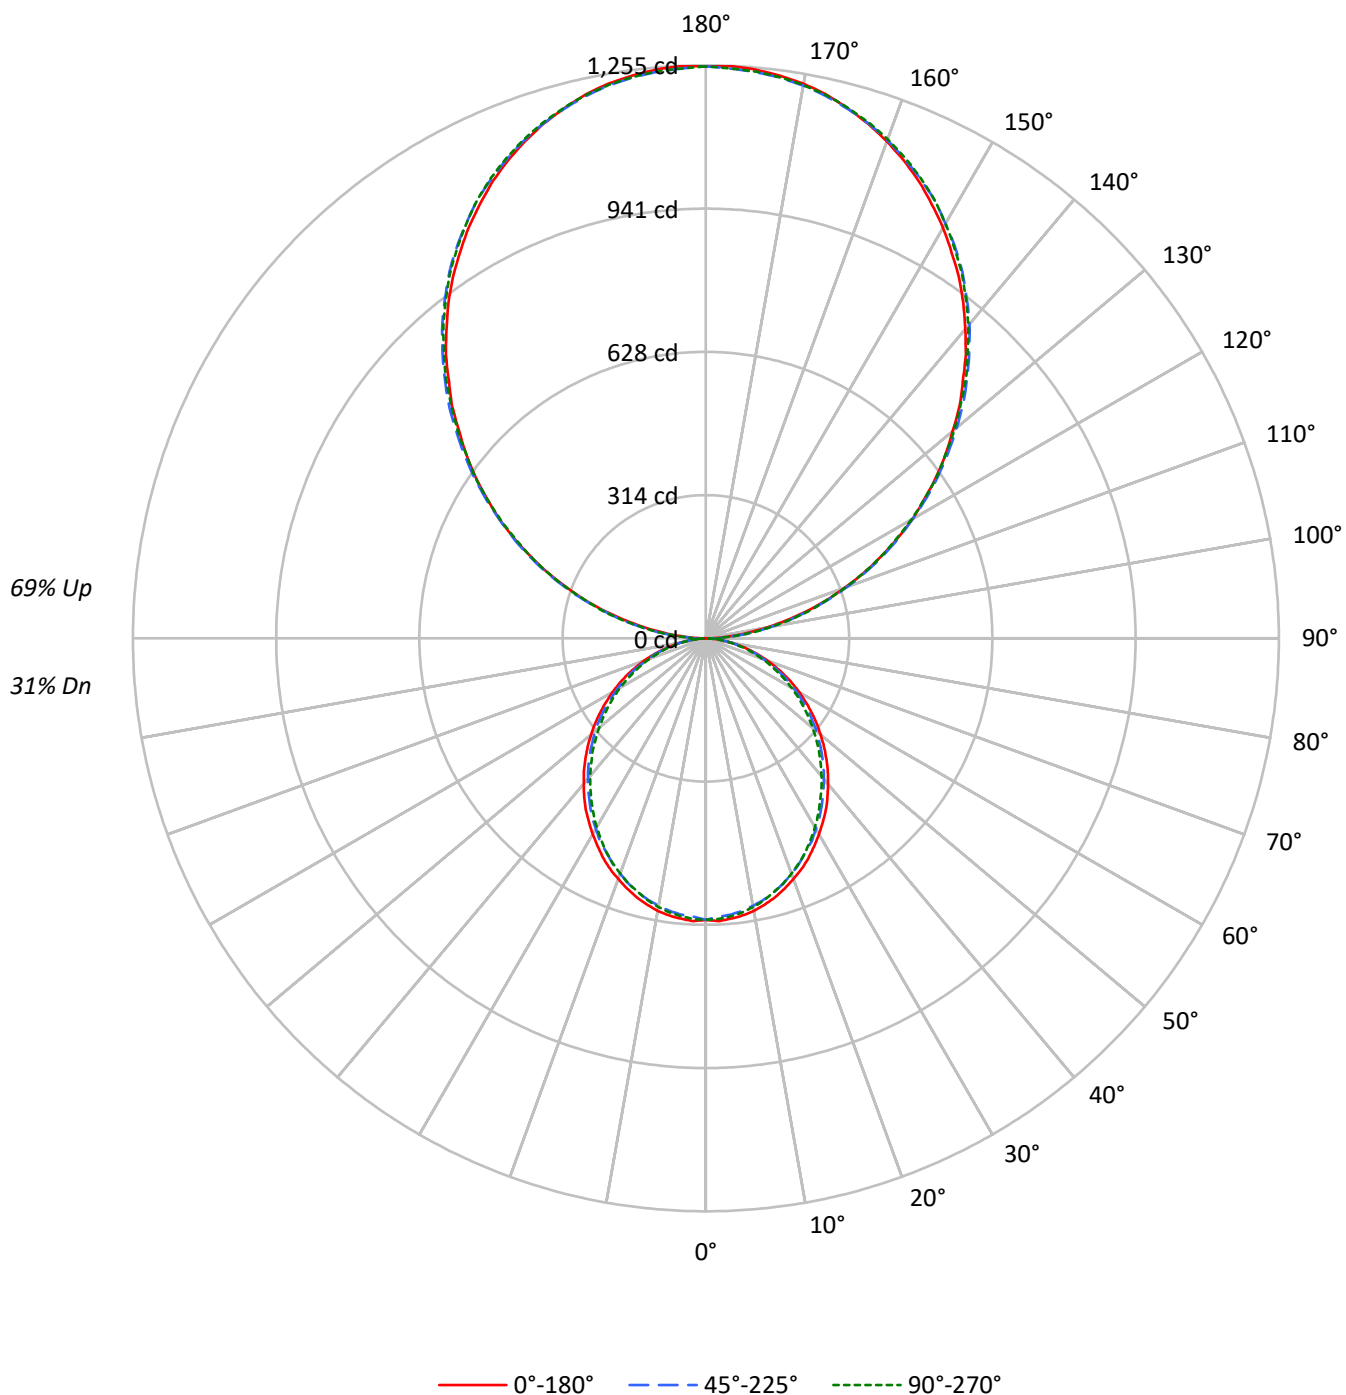

TEST NUMBER: P913342

CATALOG NUMBER: DFN2DIP-HX2F0-020D050US927-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	103	103	103	103	92	92	92	92	73	73	73	55	55	55	39	39	39
1	94	89	86	82	84	80	77	74	64	61	60	48	47	46	34	33	33
2	85	78	72	67	76	70	65	61	56	52	49	42	40	38	30	29	27
3	78	68	61	56	69	62	56	51	49	45	41	37	35	32	27	25	23
4	71	60	53	47	63	55	48	43	44	39	35	33	30	28	24	22	20
5	65	54	46	40	58	49	42	37	39	34	30	30	26	24	21	19	17
6	60	48	40	35	54	44	37	32	35	30	26	27	23	21	19	17	15
7	55	43	36	30	49	39	33	28	32	27	23	24	21	18	18	15	14
8	51	39	32	27	46	36	29	24	29	24	20	22	19	16	16	14	12
9	47	36	28	24	43	32	26	22	26	21	18	20	17	15	15	13	11
10	44	33	26	21	40	30	24	19	24	19	16	19	15	13	14	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1453	1453	1453
5°	1453	1429	1439
10°	1439	1406	1417
15°	1415	1380	1384
20°	1384	1344	1350
25°	1353	1302	1311
30°	1315	1263	1263
35°	1279	1217	1212
40°	1235	1171	1163
45°	1191	1124	1113
50°	1142	1075	1056
55°	1091	1019	1002
60°	1034	952	941
65°	970	883	868
70°	890	798	790
75°	780	696	714
80°	645	567	575
85°	437	355	357

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1683 cd/sqm

TEST NUMBER: P913342

CATALOG NUMBER: DFN2DIP-HX2F0-020D050US927-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	58.0	1.1
10°-20°	163.3	3.2
20°-30°	239.9	4.7
30°-40°	278.7	5.5
40°-50°	278.3	5.5
50°-60°	242.7	4.8
60°-70°	179.4	3.5
70°-80°	101.5	2.0
80°-90°	30.4	0.6
90°-100°	77.5	1.5
100°-110°	246.3	4.9
110°-120°	421.5	8.3
120°-130°	554.3	10.9
130°-140°	622.2	12.3
140°-150°	610.1	12.0
150°-160°	511.8	10.1
160°-170°	339.4	6.7
170°-180°	118.6	2.3
0°-30°	461.2	9.1
0°-40°	739.9	14.6
0°-60°	1260.8	24.8
0°-90°	1572.1	31.0
90°-120°	745.3	14.7
90°-150°	2532.0	49.9
90°-180°	3502.0	69.0
0°-180°	5074.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	616	616	616	616	616	
5°	616	614	608	612	611	59
15°	587	583	576	578	575	165
25°	531	526	516	518	516	244
35°	458	452	443	439	436	286
45°	373	369	360	353	351	288
55°	282	279	272	264	261	252
65°	190	187	181	176	172	188
75°	100	98	95	92	93	106
85°	24	24	23	21	21	27
90°	1	14	37	35	36	5
95°	55	66	68	68	66	61
105°	227	230	233	234	234	240
115°	423	429	427	426	423	418
125°	615	625	622	618	617	550
135°	796	807	810	809	806	615
145°	966	974	980	981	977	604
155°	1105	1108	1111	1116	1113	508
165°	1202	1201	1201	1208	1203	339
175°	1250	1247	1245	1253	1246	119
180°	1253	1253	1253	1253	1253	

TEST NUMBER: P913342

CATALOG NUMBER: DFN2DIP-HX2F0-020D050US927-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	616.5	616.5	616.5	616.5	616.5
2.5°	620.0	617.1	610.5	616.5	615.4
5°	616.5	614.2	607.6	612.4	611.2
7.5°	612.4	608.8	602.3	607.0	605.9
10°	605.9	601.7	594.6	599.3	597.5
12.5°	596.9	593.4	586.3	589.2	588.0
15°	586.8	583.4	575.6	578.0	575.0
17.5°	574.4	570.9	563.2	566.1	563.2
20°	560.8	557.2	548.9	550.7	548.3
22.5°	547.2	541.9	534.1	534.1	532.9
25°	531.2	526.4	516.3	517.5	516.3
27.5°	513.3	509.2	501.5	499.8	496.8
30°	495.6	490.8	482.0	480.2	477.8
32.5°	476.6	473.1	463.6	460.0	457.6
35°	458.3	452.3	442.8	439.3	436.3
37.5°	437.5	432.1	422.6	418.5	415.5
40°	416.1	411.4	401.9	396.6	394.2
42.5°	395.4	390.6	381.2	375.3	371.7
45°	372.9	368.8	359.8	353.3	350.9
47.5°	350.9	346.8	337.3	330.7	327.3
50°	327.8	324.9	316.6	308.2	305.3
52.5°	305.3	301.1	293.4	286.9	282.8
55°	282.2	278.6	271.5	264.4	261.4
57.5°	259.0	256.1	248.3	241.3	238.8
60°	235.9	233.6	225.3	218.7	217.0
62.5°	213.4	209.2	203.4	197.4	195.0
65°	190.3	186.7	180.9	175.5	172.5
67.5°	166.6	163.6	158.3	154.2	151.8
70°	144.7	142.3	136.9	132.8	130.5
72.5°	122.2	119.8	116.8	112.6	110.9
75°	99.6	98.5	95.4	91.9	93.1
77.5°	79.5	77.1	75.8	74.1	72.3
80°	59.3	58.7	57.5	55.7	54.5
82.5°	40.3	40.3	39.8	37.4	37.4
85°	24.2	23.7	23.1	21.3	20.8
87.5°	10.7	9.5	8.3	6.6	5.9
90°	1.1	13.6	37.0	34.8	35.9
92.5°	23.4	31.7	32.9	34.0	34.0
95°	55.1	65.8	67.6	67.6	65.8
97.5°	91.7	101.6	105.8	105.8	105.8
100°	134.0	142.8	145.8	145.8	144.7
102.5°	178.6	185.1	189.2	190.4	189.2
105°	227.4	230.4	232.7	234.5	234.5
107.5°	275.7	280.2	280.2	281.0	275.7
110°	322.5	328.6	328.6	328.6	325.5

TEST NUMBER: P913342

CATALOG NUMBER: DFN2DIP-HX2F0-020D050US927-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	373.1	379.5	378.4	375.4	373.1
115°	422.9	429.0	427.1	426.0	422.9
117.5°	472.5	480.8	475.5	472.5	469.4
120°	522.3	530.6	522.3	522.3	518.9
122.5°	567.6	578.2	572.9	569.9	567.6
125°	615.2	624.6	621.6	618.2	617.1
127.5°	661.6	673.4	669.2	664.6	661.6
130°	705.1	718.7	716.8	714.5	710.3
132.5°	753.8	764.4	765.2	759.9	756.8
135°	795.7	807.4	809.7	808.6	805.6
137.5°	842.6	852.0	853.9	853.1	848.6
140°	883.7	893.2	898.4	898.4	894.3
142.5°	926.0	935.5	938.5	939.6	935.5
145°	966.1	973.6	979.6	980.8	976.6
147.5°	1002.0	1011.4	1015.9	1017.8	1013.6
150°	1038.9	1045.4	1049.5	1052.9	1049.5
152.5°	1071.8	1078.2	1083.5	1087.7	1083.5
155°	1104.6	1107.6	1111.0	1116.3	1112.9
157.5°	1133.0	1135.2	1137.1	1144.7	1139.4
160°	1158.2	1160.5	1161.7	1168.1	1163.6
162.5°	1181.7	1181.7	1182.8	1190.0	1184.7
165°	1201.7	1200.6	1200.6	1208.2	1202.8
167.5°	1219.8	1216.4	1216.4	1224.0	1218.7
170°	1233.4	1230.4	1229.3	1236.8	1230.4
172.5°	1242.9	1239.8	1238.7	1246.3	1239.8
175°	1250.5	1247.4	1245.2	1252.7	1246.3
177.5°	1254.6	1251.6	1249.3	1255.7	1249.3
180°	1252.7	1252.7	1252.7	1252.7	1252.7

TEST NUMBER: P913342

CATALOG NUMBER: DFN2DIP-HX2F0-020D050US927-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.35	7.06	7.45	8.16	9.68	5.93	6.64	7.03	7.74	9.26
	3H	7.97	8.61	9.09	9.72	11.26	7.51	8.15	8.63	9.26	10.80
	4H	8.54	9.14	9.66	10.25	11.79	8.08	8.68	9.20	9.79	11.34
	6H	8.91	9.47	10.04	10.58	12.13	8.45	9.01	9.58	10.12	11.67
	8H	9.00	9.53	10.13	10.66	12.21	8.54	9.07	9.68	10.20	11.75
	12H	9.03	9.54	10.17	10.66	12.23	8.57	9.08	9.71	10.20	11.77
4H	2H	6.78	7.39	7.91	8.50	10.04	6.44	7.05	7.57	8.16	9.70
	3H	8.60	9.11	9.74	10.25	11.80	8.22	8.73	9.36	9.86	11.42
	4H	9.29	9.76	10.43	10.88	12.46	8.90	9.36	10.04	10.49	12.06
	6H	9.78	10.18	10.92	11.32	12.89	9.38	9.78	10.53	10.93	12.49
	8H	9.91	10.28	11.06	11.42	13.00	9.51	9.89	10.66	11.03	12.61
	12H	9.96	10.30	11.13	11.45	13.04	9.56	9.90	10.72	11.05	12.64
8H	4H	9.47	9.84	10.61	10.98	12.56	9.12	9.49	10.26	10.63	12.21
	6H	10.06	10.37	11.23	11.55	13.13	9.71	10.02	10.88	11.20	12.78
	8H	10.27	10.53	11.44	11.70	13.29	9.91	10.18	11.08	11.34	12.94
	12H	10.37	10.61	11.55	11.77	13.40	10.00	10.24	11.18	11.40	13.03
12H	4H	9.44	9.78	10.61	10.93	12.52	9.10	9.44	10.26	10.59	12.17
	6H	10.09	10.36	11.26	11.52	13.11	9.74	10.01	10.92	11.17	12.77
	8H	10.30	10.54	11.48	11.70	13.33	9.96	10.19	11.13	11.35	12.98

END OF REPORT