

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P913414

Luminaire Tested: DFN2DIP-HX2F0-060D030US927-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P913414
REPORT IS A COMBINATION OF REPORTS P899169 AND P896039
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX2F0-060D030US927-FLLFLL
Description: 2 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6808.8 lumens
Efficiency: N/A
Efficacy: 83.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 1.99' x L: 2.3' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 81.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9971
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P913414

CATALOG NUMBER: DFN2DIP-HX2F0-060D030US927-FLLFLL

Luminous Intensity Polar Plot

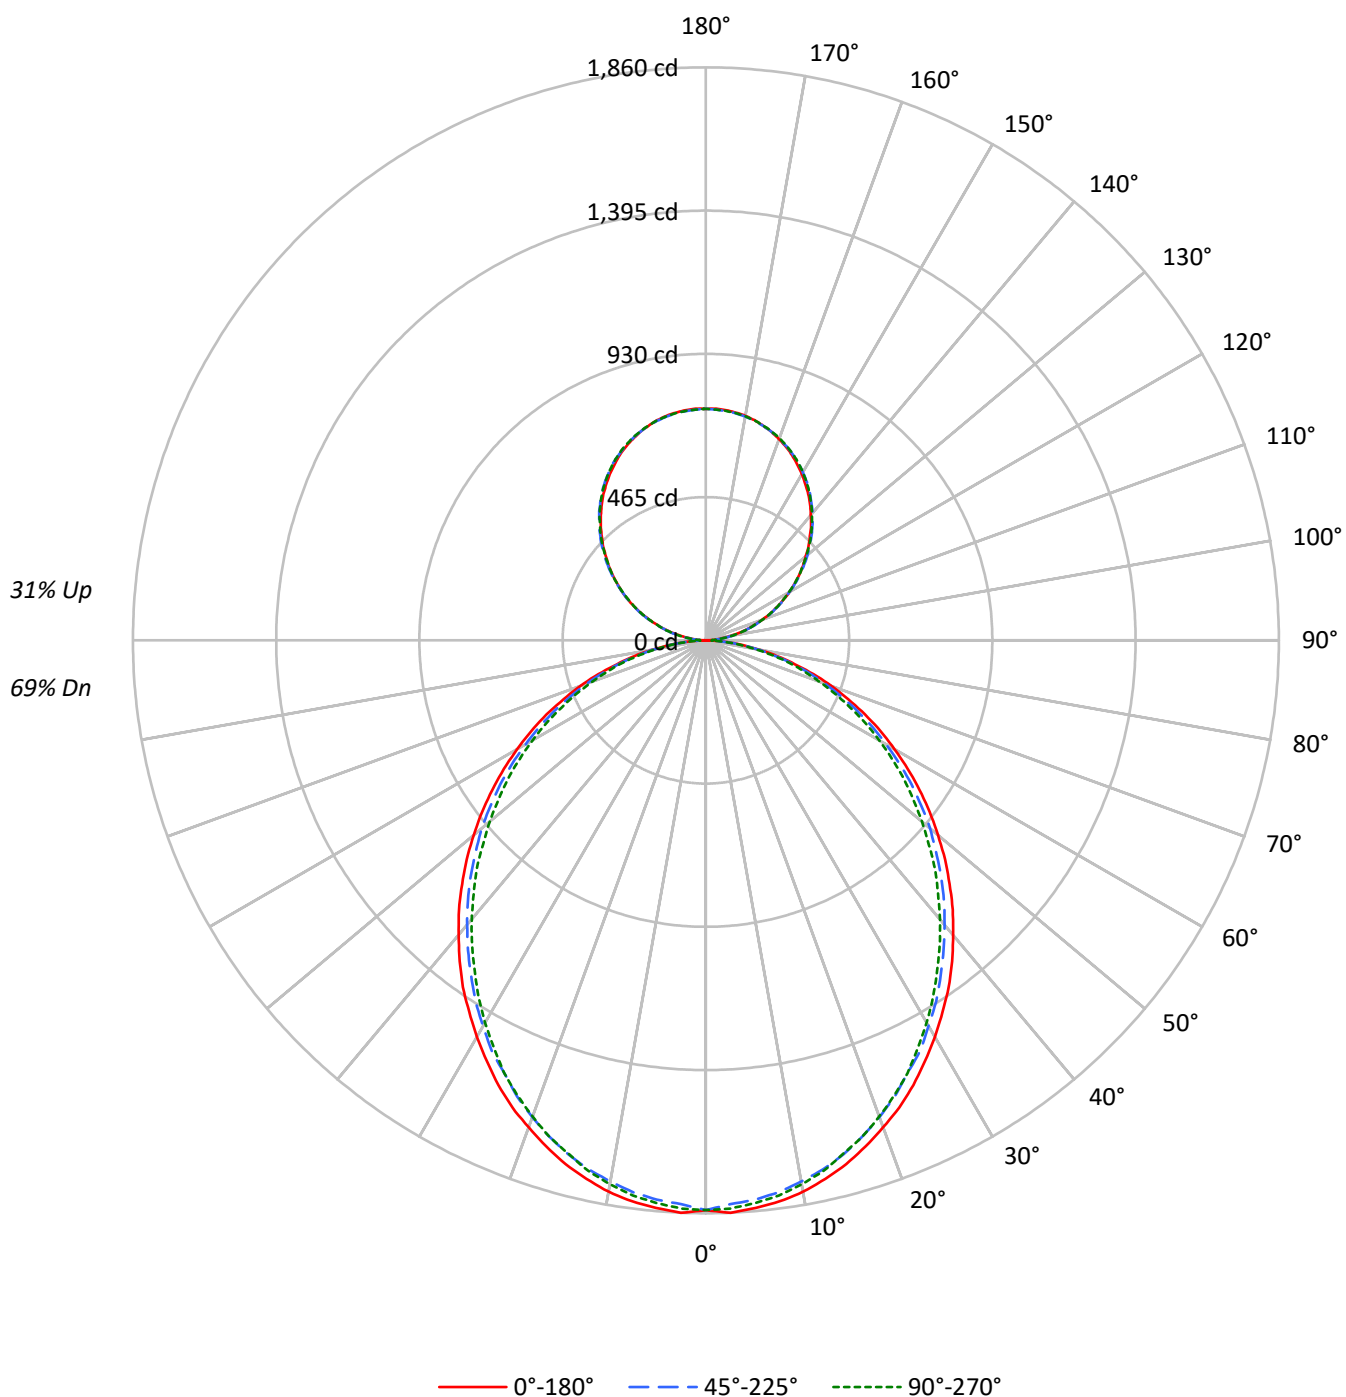

TEST NUMBER: P913414

CATALOG NUMBER: DFN2DIP-HX2F0-060D030US927-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	112	112	112	112	106	106	106	106	94	94	94	83	83	83	74	74	74
1	102	98	94	90	96	92	89	86	83	80	77	74	71	70	65	64	62
2	93	85	79	74	88	81	75	70	72	68	64	65	61	58	57	55	52
3	85	75	67	61	80	71	64	59	64	58	54	57	53	49	51	48	45
4	78	67	58	52	73	63	56	50	57	51	46	51	46	42	46	42	39
5	71	59	51	45	67	56	49	43	51	45	40	46	41	37	41	37	34
6	66	53	45	39	62	51	43	38	46	40	35	41	36	32	37	33	30
7	61	48	40	34	58	46	39	33	42	36	31	38	33	29	34	30	26
8	57	44	36	31	54	42	35	30	38	32	28	35	29	26	31	27	24
9	53	40	33	27	50	39	31	26	35	29	25	32	27	23	29	25	21
10	50	37	30	25	47	36	29	24	32	27	22	30	25	21	27	23	20

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4357	4357	4357
5°	4357	4286	4318
10°	4315	4218	4251
15°	4245	4139	4152
20°	4152	4032	4051
25°	4060	3906	3935
30°	3946	3789	3790
35°	3837	3652	3637
40°	3705	3513	3490
45°	3572	3373	3340
50°	3427	3226	3167
55°	3274	3056	3006
60°	3101	2857	2822
65°	2911	2648	2604
70°	2670	2393	2368
75°	2339	2088	2140
80°	1936	1701	1727
85°	1314	1067	1070

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3572 cd/sqm

TEST NUMBER: P913414

CATALOG NUMBER: DFN2DIP-HX2F0-060D030US927-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	174.1	2.6
10°-20°	489.8	7.2
20°-30°	719.8	10.6
30°-40°	836.0	12.3
40°-50°	834.9	12.3
50°-60°	728.0	10.7
60°-70°	538.2	7.9
70°-80°	304.5	4.5
80°-90°	82.5	1.2
90°-100°	46.5	0.7
100°-110°	147.8	2.2
110°-120°	252.9	3.7
120°-130°	332.6	4.9
130°-140°	373.3	5.5
140°-150°	366.1	5.4
150°-160°	307.1	4.5
160°-170°	203.7	3.0
170°-180°	71.2	1.0
0°-30°	1383.6	20.3
0°-40°	2219.6	32.6
0°-60°	3782.5	55.6
0°-90°	4707.7	69.1
90°-120°	447.2	6.6
90°-150°	1519.2	22.3
90°-180°	2101.0	30.9
0°-180°	6808.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1849	1849	1849	1849	1849	
5°	1849	1842	1823	1837	1834	176
15°	1760	1750	1727	1734	1725	496
25°	1593	1579	1549	1552	1549	733
35°	1375	1357	1328	1318	1309	858
45°	1119	1106	1079	1060	1053	863
55°	847	836	814	793	784	757
65°	571	560	542	526	518	564
75°	299	295	286	276	279	319
85°	73	71	69	64	62	81
90°	1	8	22	21	22	7
95°	33	40	41	41	40	37
105°	136	138	140	141	141	144
115°	254	257	256	256	254	251
125°	369	375	373	371	370	330
135°	477	484	486	485	483	369
145°	580	584	588	588	586	362
155°	663	665	667	670	668	305
165°	721	720	720	725	722	203
175°	750	748	747	752	748	71
180°	752	752	752	752	752	

TEST NUMBER: P913414

CATALOG NUMBER: DFN2DIP-HX2F0-060D030US927-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1849.4	1849.4	1849.4	1849.4	1849.4
2.5°	1860.2	1851.3	1831.7	1849.4	1846.0
5°	1849.4	1842.5	1822.8	1837.0	1833.6
7.5°	1837.0	1826.5	1806.8	1821.1	1817.6
10°	1817.6	1805.1	1783.8	1797.9	1792.6
12.5°	1790.8	1780.2	1758.9	1767.8	1764.2
15°	1760.5	1750.0	1726.8	1734.0	1725.1
17.5°	1723.2	1712.7	1689.5	1698.3	1689.5
20°	1682.3	1671.7	1646.8	1652.1	1645.1
22.5°	1641.6	1625.5	1602.3	1602.3	1598.7
25°	1593.4	1579.3	1549.0	1552.4	1549.0
27.5°	1540.0	1527.6	1504.5	1499.3	1490.4
30°	1486.8	1472.4	1445.9	1440.6	1433.4
32.5°	1429.8	1419.3	1390.8	1380.0	1372.8
35°	1374.8	1357.0	1328.5	1317.7	1308.8
37.5°	1312.5	1296.4	1268.0	1255.4	1246.6
40°	1248.5	1234.1	1205.7	1189.9	1182.6
42.5°	1186.2	1171.9	1143.6	1125.7	1115.1
45°	1118.7	1106.2	1079.4	1060.0	1052.8
47.5°	1052.8	1040.4	1011.9	992.3	981.7
50°	983.4	974.5	949.7	924.7	915.8
52.5°	915.8	903.4	880.4	860.8	848.3
55°	846.6	835.8	814.5	793.2	784.3
57.5°	777.2	768.3	745.1	723.8	716.6
60°	707.7	700.8	675.9	656.2	650.9
62.5°	640.2	627.7	610.0	592.2	585.1
65°	570.9	560.2	542.5	526.4	517.5
67.5°	499.8	490.8	474.9	462.5	455.3
70°	434.0	426.8	410.7	398.3	391.3
72.5°	366.4	359.3	350.4	337.9	332.6
75°	298.7	295.3	286.2	275.7	279.2
77.5°	238.3	231.2	227.5	222.3	217.0
80°	177.9	176.0	172.5	167.2	163.6
82.5°	121.0	121.0	119.2	112.1	112.1
85°	72.8	71.1	69.4	63.9	62.3
87.5°	32.1	28.5	24.9	19.6	17.7
90°	0.7	8.2	22.2	20.8	21.5
92.5°	14.0	19.0	19.7	20.4	20.4
95°	33.1	39.5	40.6	40.6	39.5
97.5°	55.1	60.9	63.5	63.5	63.5
100°	80.4	85.6	87.5	87.5	86.8
102.5°	107.2	111.1	113.5	114.2	113.5
105°	136.4	138.2	139.6	140.7	140.7
107.5°	165.4	168.1	168.1	168.6	165.4
110°	193.5	197.2	197.2	197.2	195.4

TEST NUMBER: P913414

CATALOG NUMBER: DFN2DIP-HX2F0-060D030US927-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	223.9	227.8	227.0	225.2	223.9
115°	253.8	257.4	256.3	255.6	253.8
117.5°	283.4	288.4	285.3	283.4	281.6
120°	313.4	318.4	313.4	313.4	311.3
122.5°	340.6	346.9	343.7	341.9	340.6
125°	369.2	374.8	373.0	370.9	370.3
127.5°	397.0	404.0	401.6	398.8	397.0
130°	423.0	431.2	430.1	428.7	426.2
132.5°	452.3	458.6	459.1	455.9	454.1
135°	477.4	484.4	485.8	485.1	483.3
137.5°	505.5	511.2	512.3	511.9	509.1
140°	530.2	535.9	539.1	539.1	536.5
142.5°	555.6	561.3	563.1	563.8	561.3
145°	579.6	584.2	587.8	588.4	586.0
147.5°	601.2	606.8	609.5	610.7	608.2
150°	623.4	627.2	629.7	631.8	629.7
152.5°	643.1	646.9	650.1	652.6	650.1
155°	662.8	664.6	666.6	669.8	667.8
157.5°	679.8	681.1	682.3	686.8	683.7
160°	695.0	696.3	697.0	700.8	698.1
162.5°	709.0	709.0	709.7	714.0	710.8
165°	721.0	720.3	720.3	724.8	721.7
167.5°	731.9	729.8	729.8	734.4	731.2
170°	740.1	738.2	737.6	742.1	738.2
172.5°	745.7	743.9	743.2	747.7	743.9
175°	750.3	748.5	747.1	751.6	747.7
177.5°	752.7	750.9	749.6	753.4	749.6
180°	751.6	751.6	751.6	751.6	751.6

TEST NUMBER: P913414

CATALOG NUMBER: DFN2DIP-HX2F0-060D030US927-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.85	14.92	14.63	15.71	16.68	13.43	14.49	14.20	15.29	16.26
	3H	15.50	16.46	16.29	17.26	18.26	15.04	16.00	15.83	16.80	17.80
	4H	16.08	16.98	16.89	17.80	18.81	15.62	16.53	16.43	17.34	18.35
	6H	16.47	17.31	17.29	18.13	19.15	16.01	16.85	16.83	17.67	18.69
	8H	16.57	17.37	17.40	18.21	19.23	16.12	16.91	16.94	17.75	18.78
	12H	16.62	17.38	17.45	18.21	19.26	16.16	16.91	16.99	17.75	18.80
4H	2H	14.33	15.23	15.14	16.04	17.05	13.99	14.89	14.80	15.71	16.72
	3H	16.18	16.94	17.00	17.78	18.81	15.80	16.55	16.62	17.40	18.43
	4H	16.89	17.57	17.72	18.42	19.47	16.49	17.18	17.33	18.02	19.08
	6H	17.39	17.98	18.24	18.85	19.91	16.99	17.59	17.84	18.46	19.52
	8H	17.53	18.09	18.38	18.95	20.02	17.13	17.69	17.99	18.55	19.63
	12H	17.60	18.10	18.48	18.99	20.06	17.20	17.70	18.07	18.58	19.66
8H	4H	17.09	17.64	17.94	18.51	19.58	16.74	17.29	17.59	18.16	19.23
	6H	17.70	18.16	18.58	19.06	20.14	17.35	17.81	18.23	18.71	19.78
	8H	17.90	18.31	18.80	19.21	20.30	17.55	17.96	18.44	18.86	19.95
	12H	18.03	18.39	18.92	19.28	20.42	17.66	18.02	18.55	18.91	20.05
12H	4H	17.08	17.58	17.95	18.47	19.54	16.74	17.24	17.61	18.12	19.20
	6H	17.72	18.13	18.62	19.03	20.12	17.38	17.79	18.27	18.69	19.78
	8H	17.96	18.32	18.85	19.21	20.35	17.61	17.97	18.51	18.87	20.01