

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P916080

Luminaire Tested: DFN2DIP-HX2F0-030D020US930-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P916080
REPORT IS A COMBINATION OF REPORTS P899154 AND P896039
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX2F0-030D020US930-RLLFLL
Description: 2 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3522.1 lumens
Efficiency: N/A
Efficacy: 87.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 1.99' x L: 2.3' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 40.5
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9951
Total Harmonic Distortion (THDi): 0.07
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P916080

CATALOG NUMBER: DFN2DIP-HX2F0-030D020US930-RLLFLL

Luminous Intensity Polar Plot

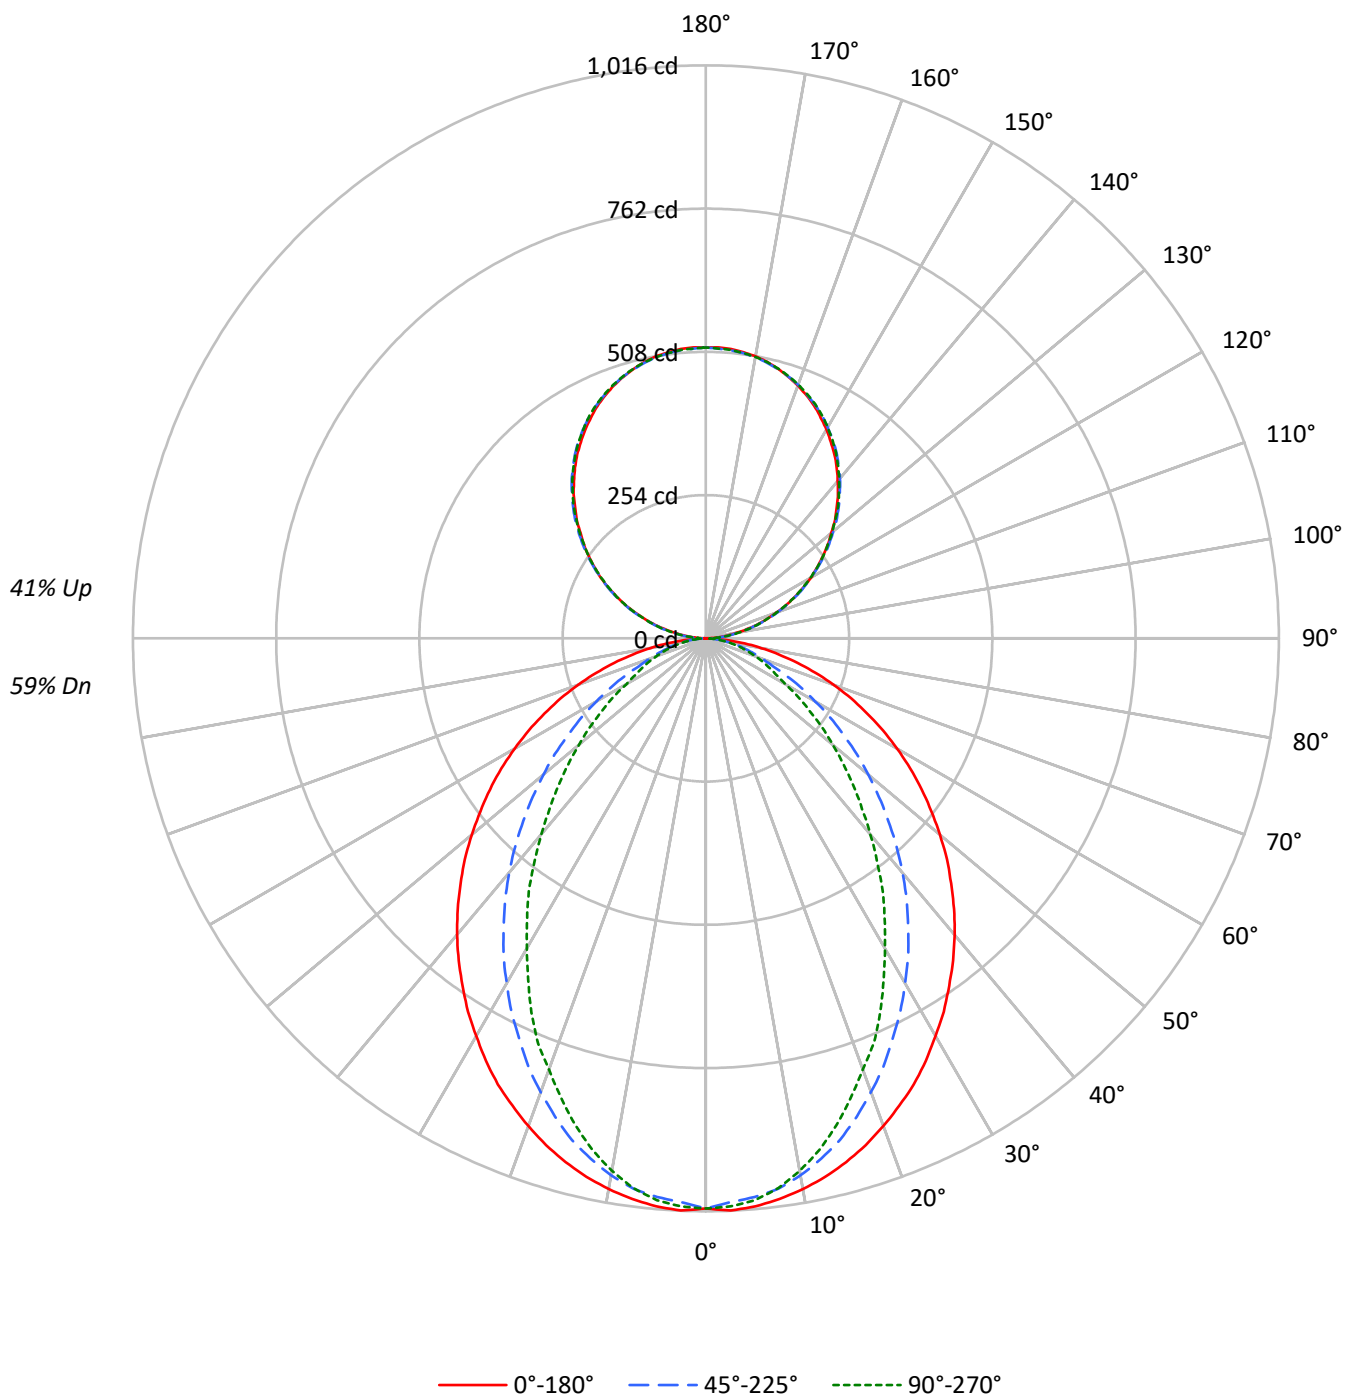

TEST NUMBER: P916080

CATALOG NUMBER: DFN2DIP-HX2F0-030D020US930-RLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	109	109	109	109	102	102	102	102	88	88	88	76	76	76	64	64	64
1	100	96	92	89	94	90	87	84	78	76	74	68	66	64	58	57	56
2	92	85	79	74	86	79	74	70	69	65	62	60	57	55	52	50	48
3	84	75	68	62	78	70	64	59	62	57	53	54	50	47	46	44	41
4	77	67	59	53	72	63	56	51	55	50	46	48	44	41	42	39	36
5	71	60	52	46	66	56	49	44	50	44	40	44	39	36	38	34	32
6	66	54	46	40	61	51	44	39	45	39	35	40	35	32	35	31	28
7	61	49	41	36	57	46	39	34	41	35	31	36	32	28	32	28	25
8	57	45	37	32	53	42	35	30	38	32	28	33	29	25	29	26	23
9	53	41	34	29	50	39	32	27	35	29	25	31	26	23	27	24	21
10	50	38	31	26	47	36	29	25	32	27	23	29	24	21	25	22	19

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2382	2382	2382
5°	2382	2338	2355
10°	2354	2287	2274
15°	2318	2206	2151
20°	2272	2096	2003
25°	2224	1975	1859
30°	2161	1850	1679
35°	2099	1717	1520
40°	2036	1581	1339
45°	1963	1430	1175
50°	1887	1277	1016
55°	1808	1116	863
60°	1715	947	706
65°	1609	777	631
70°	1480	618	565
75°	1318	534	505
80°	1085	433	425
85°	709	268	299

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1963 cd/sqm

TEST NUMBER: P916080

CATALOG NUMBER: DFN2DIP-HX2F0-030D020US930-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	94.7	2.7
10°-20°	260.1	7.4
20°-30°	365.1	10.4
30°-40°	398.0	11.3
40°-50°	365.8	10.4
50°-60°	287.3	8.2
60°-70°	187.0	5.3
70°-80°	96.3	2.7
80°-90°	26.1	0.7
90°-100°	31.9	0.9
100°-110°	101.4	2.9
110°-120°	173.5	4.9
120°-130°	228.2	6.5
130°-140°	256.1	7.3
140°-150°	251.2	7.1
150°-160°	210.7	6.0
160°-170°	139.7	4.0
170°-180°	48.8	1.4
0°-30°	720.0	20.4
0°-40°	1118.0	31.7
0°-60°	1771.2	50.3
0°-90°	2080.5	59.1
90°-120°	306.8	8.7
90°-150°	1042.3	29.6
90°-180°	1442.0	40.9
0°-180°	3522.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1011	1011	1011	1011	1011	
5°	1011	1006	994	1003	1000	96
15°	962	951	920	903	894	271
25°	873	843	783	746	732	401
35°	752	705	625	567	547	471
45°	615	553	458	392	370	475
55°	467	396	297	242	225	418
65°	316	242	159	128	125	313
75°	168	104	73	67	66	178
85°	39	20	17	17	17	45
90°	0	6	15	14	15	3
95°	23	27	28	28	27	25
105°	94	95	96	96	96	99
115°	174	177	176	175	174	172
125°	253	257	256	254	254	226
135°	328	332	333	333	332	253
145°	398	401	403	404	402	248
155°	455	456	457	460	458	209
165°	495	494	494	497	495	140
175°	515	514	513	516	513	49
180°	516	516	516	516	516	

TEST NUMBER: P916080

CATALOG NUMBER: DFN2DIP-HX2F0-030D020US930-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1010.9	1010.9	1010.9	1010.9	1010.9
2.5°	1015.5	1010.9	1000.8	1010.0	1008.2
5°	1010.9	1006.3	994.4	1002.7	999.9
7.5°	1002.7	997.2	984.4	988.0	983.4
10°	991.6	985.3	967.0	964.2	958.8
12.5°	978.0	969.7	945.0	939.5	929.4
15°	961.5	951.4	920.3	902.9	893.8
17.5°	942.2	927.6	889.2	869.1	854.4
20°	920.3	902.0	856.2	833.5	813.3
22.5°	896.6	875.5	822.4	791.3	777.6
25°	872.8	843.4	783.1	745.6	731.8
27.5°	844.4	813.3	746.5	703.5	682.4
30°	814.2	779.4	706.2	659.7	634.9
32.5°	784.9	742.8	667.9	612.9	590.0
35°	752.0	705.3	624.8	567.2	547.1
37.5°	720.0	669.6	584.6	521.4	498.6
40°	686.2	631.3	542.5	477.5	453.8
42.5°	651.3	592.9	500.4	432.7	409.9
45°	614.8	553.4	457.5	392.4	370.5
47.5°	580.0	515.1	416.3	351.2	331.2
50°	541.6	476.6	376.0	312.8	293.7
52.5°	504.0	435.5	337.6	277.2	259.8
55°	467.4	396.1	297.3	242.5	225.1
57.5°	430.0	356.8	261.7	210.4	195.8
60°	391.5	318.4	224.1	177.5	162.9
62.5°	354.1	280.9	192.1	148.2	141.0
65°	315.6	241.5	159.1	128.1	125.3
67.5°	279.1	204.9	128.1	112.5	109.7
70°	240.6	169.3	106.1	96.9	93.3
72.5°	204.0	136.2	88.7	81.4	79.6
75°	168.3	104.3	73.2	66.8	65.9
77.5°	132.6	74.0	57.6	54.0	52.1
80°	99.7	53.1	43.9	40.3	40.3
82.5°	69.5	35.7	30.2	28.4	28.4
85°	39.3	20.1	17.4	17.4	17.4
87.5°	14.7	7.3	7.3	6.4	6.4
90°	0.5	5.6	15.2	14.3	14.8
92.5°	9.6	13.0	13.5	14.0	14.0
95°	22.7	27.1	27.8	27.8	27.1
97.5°	37.7	41.8	43.5	43.5	43.5
100°	55.2	58.8	60.0	60.0	59.5
102.5°	73.5	76.1	77.9	78.4	77.9
105°	93.6	94.8	95.8	96.5	96.5
107.5°	113.5	115.4	115.4	115.7	113.5
110°	132.8	135.3	135.3	135.3	134.0

TEST NUMBER: P916080

CATALOG NUMBER: DFN2DIP-HX2F0-030D020US930-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	153.6	156.2	155.8	154.5	153.6
115°	174.1	176.6	175.9	175.4	174.1
117.5°	194.5	198.0	195.8	194.5	193.2
120°	215.0	218.4	215.0	215.0	213.6
122.5°	233.7	238.0	235.9	234.6	233.7
125°	253.2	257.1	255.9	254.5	254.0
127.5°	272.4	277.2	275.5	273.6	272.4
130°	290.2	295.9	295.1	294.2	292.4
132.5°	310.3	314.7	314.9	312.8	311.5
135°	327.6	332.4	333.3	332.9	331.6
137.5°	346.8	350.7	351.6	351.2	349.4
140°	363.8	367.7	369.9	369.9	368.2
142.5°	381.2	385.1	386.4	386.8	385.1
145°	397.7	400.8	403.3	403.7	402.0
147.5°	412.5	416.4	418.2	419.0	417.3
150°	427.7	430.3	432.0	433.4	432.0
152.5°	441.2	443.8	446.0	447.8	446.0
155°	454.8	456.0	457.4	459.6	458.2
157.5°	466.4	467.3	468.1	471.2	469.0
160°	476.9	477.8	478.3	480.9	479.0
162.5°	486.5	486.5	486.9	489.9	487.7
165°	494.7	494.2	494.2	497.3	495.2
167.5°	502.1	500.8	500.8	503.9	501.7
170°	507.8	506.5	506.1	509.2	506.5
172.5°	511.7	510.4	510.0	513.1	510.4
175°	514.8	513.6	512.6	515.7	513.1
177.5°	516.5	515.3	514.3	516.9	514.3
180°	515.7	515.7	515.7	515.7	515.7

TEST NUMBER: P916080

CATALOG NUMBER: DFN2DIP-HX2F0-030D020US930-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.83	11.74	11.71	12.64	13.78	6.81	7.72	7.70	8.62	9.76
	3H	12.49	13.30	13.39	14.21	15.38	7.99	8.80	8.89	9.71	10.88
	4H	13.09	13.85	14.00	14.77	15.94	8.43	9.20	9.34	10.11	11.29
	6H	13.49	14.20	14.41	15.12	16.30	8.74	9.45	9.67	10.37	11.56
	8H	13.61	14.28	14.54	15.22	16.40	8.83	9.50	9.76	10.44	11.62
	12H	13.66	14.30	14.60	15.23	16.44	8.87	9.51	9.80	10.44	11.65
4H	2H	10.86	11.62	11.77	12.54	13.71	7.40	8.17	8.32	9.09	10.26
	3H	12.66	13.30	13.59	14.25	15.43	8.74	9.38	9.67	10.32	11.51
	4H	13.34	13.92	14.28	14.86	16.07	9.28	9.86	10.21	10.80	12.01
	6H	13.83	14.33	14.78	15.30	16.51	9.68	10.18	10.63	11.15	12.36
	8H	14.00	14.46	14.95	15.42	16.65	9.81	10.27	10.76	11.23	12.46
	12H	14.08	14.50	15.05	15.48	16.71	9.86	10.29	10.83	11.26	12.49
8H	4H	13.31	13.78	14.26	14.73	15.96	9.55	10.02	10.50	10.97	12.20
	6H	13.85	14.24	14.83	15.23	16.46	10.05	10.43	11.02	11.43	12.66
	8H	14.05	14.39	15.04	15.38	16.62	10.23	10.57	11.21	11.56	12.80
	12H	14.18	14.48	15.16	15.46	16.75	10.34	10.64	11.32	11.62	12.91
12H	4H	13.26	13.68	14.23	14.66	15.89	9.55	9.97	10.52	10.95	12.18
	6H	13.82	14.17	14.81	15.15	16.40	10.09	10.43	11.08	11.42	12.66
	8H	14.03	14.33	15.02	15.31	16.60	10.29	10.59	11.28	11.57	12.86