

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P916145

Luminaire Tested: DFN2DIP-HX2F0-060D030US930-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P916145
REPORT IS A COMBINATION OF REPORTS P900690 AND P897595
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX2F0-060D030US930-RLLONL
Description: 2 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6579.4 lumens
Efficiency: N/A
Efficacy: 81.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 1.99' x L: 2.3' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 81.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9971
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P916145

CATALOG NUMBER: DFN2DIP-HX2F0-060D030US930-RLLONL

Luminous Intensity Polar Plot

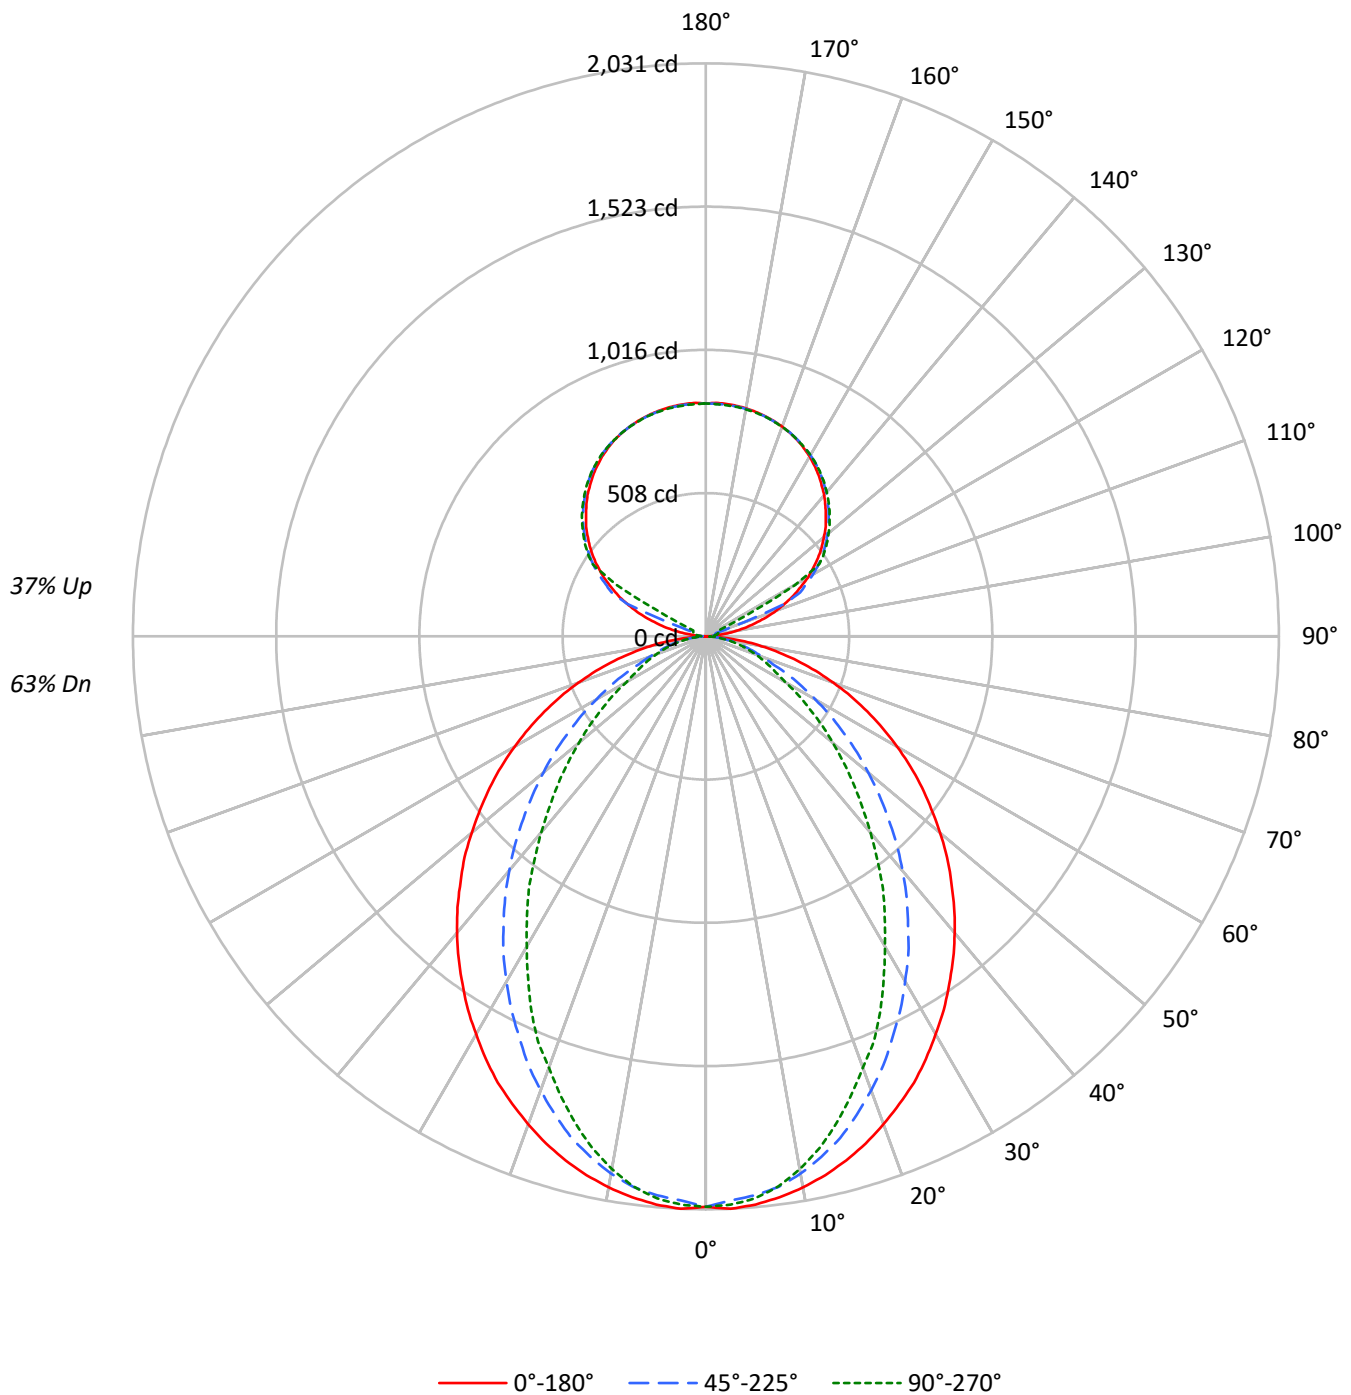

TEST NUMBER: P916145

CATALOG NUMBER: DFN2DIP-HX2F0-060D030US930-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	110	110	110	110	103	103	103	103	91	91	91	79	79	79	68	68	68
1	101	97	93	90	95	91	88	85	80	78	76	71	69	67	61	60	59
2	93	86	80	75	87	81	75	71	71	67	64	63	60	57	55	52	51
3	85	76	69	63	80	72	65	60	63	58	54	56	52	49	49	46	44
4	78	68	60	54	73	64	57	52	57	51	47	50	46	43	44	41	38
5	72	61	53	47	67	57	50	45	51	45	41	46	41	37	40	37	34
6	67	55	47	41	62	52	45	39	46	41	36	41	37	33	37	33	30
7	62	50	42	36	58	47	40	35	42	36	32	38	33	30	34	30	27
8	58	45	38	32	54	43	36	31	39	33	29	35	30	27	31	27	24
9	54	42	34	29	51	40	33	28	36	30	26	32	27	24	29	25	22
10	50	38	31	26	47	37	30	25	33	28	24	30	25	22	27	23	20

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4764	4764	4764
5°	4764	4677	4709
10°	4709	4574	4547
15°	4637	4411	4302
20°	4543	4193	4005
25°	4448	3950	3718
30°	4322	3701	3357
35°	4198	3435	3040
40°	4072	3161	2678
45°	3926	2859	2351
50°	3775	2555	2031
55°	3616	2231	1725
60°	3431	1895	1412
65°	3219	1554	1261
70°	2961	1236	1129
75°	2636	1068	1010
80°	2169	865	851
85°	1419	534	596

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3926 cd/sqm

TEST NUMBER: P916145

CATALOG NUMBER: DFN2DIP-HX2F0-060D030US930-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	189.5	2.9
10°-20°	520.2	7.9
20°-30°	730.3	11.1
30°-40°	796.1	12.1
40°-50°	731.7	11.1
50°-60°	574.6	8.7
60°-70°	374.0	5.7
70°-80°	192.5	2.9
80°-90°	50.6	0.8
90°-100°	27.2	0.4
100°-110°	101.5	1.5
110°-120°	269.1	4.1
120°-130°	446.3	6.8
130°-140°	474.1	7.2
140°-150°	440.6	6.7
150°-160°	354.3	5.4
160°-170°	228.3	3.5
170°-180°	78.6	1.2
0°-30°	1439.9	21.9
0°-40°	2236.0	34.0
0°-60°	3542.3	53.8
0°-90°	4159.4	63.2
90°-120°	397.8	6.0
90°-150°	1758.9	26.7
90°-180°	2420.0	36.8
0°-180°	6579.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2022	2022	2022	2022	2022	
5°	2022	2013	1989	2005	2000	192
15°	1923	1903	1841	1806	1788	542
25°	1746	1687	1566	1491	1464	803
35°	1504	1411	1250	1134	1094	941
45°	1230	1107	915	785	741	950
55°	935	792	595	485	450	835
65°	631	483	318	256	251	626
75°	337	208	146	134	132	356
85°	79	40	35	35	35	90
90°	1	7	12	15	16	6
95°	39	19	23	26	26	46
105°	182	200	36	43	45	194
115°	343	354	368	92	49	338
125°	486	493	505	509	511	433
135°	601	610	616	622	621	464
145°	697	696	707	711	708	436
155°	768	762	769	773	768	354
165°	809	805	807	811	807	228
175°	827	823	824	828	822	79
180°	826	826	826	826	826	

TEST NUMBER: P916145

CATALOG NUMBER: DFN2DIP-HX2F0-060D030US930-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2021.8	2021.8	2021.8	2021.8	2021.8
2.5°	2030.9	2021.8	2001.6	2020.0	2016.3
5°	2021.8	2012.6	1988.8	2005.3	1999.8
7.5°	2005.3	1994.4	1968.8	1976.0	1966.8
10°	1983.3	1970.5	1934.1	1928.4	1917.5
12.5°	1956.0	1939.4	1889.9	1879.1	1858.9
15°	1923.0	1902.7	1840.6	1805.9	1787.6
17.5°	1884.6	1855.2	1778.3	1738.1	1708.9
20°	1840.6	1803.9	1712.5	1666.9	1626.5
22.5°	1793.1	1750.9	1644.8	1582.7	1555.3
25°	1745.6	1686.9	1566.2	1491.3	1463.7
27.5°	1688.9	1626.5	1493.0	1407.0	1364.9
30°	1628.5	1558.8	1412.4	1319.2	1269.7
32.5°	1569.9	1485.6	1335.8	1225.9	1180.1
35°	1504.1	1410.7	1249.8	1134.4	1094.0
37.5°	1440.0	1339.2	1169.2	1042.8	997.2
40°	1372.2	1262.6	1084.9	955.0	907.5
42.5°	1302.8	1185.7	1000.9	865.4	819.8
45°	1229.6	1106.8	914.9	784.8	740.9
47.5°	1160.1	1030.2	832.6	702.5	662.3
50°	1083.2	953.3	752.0	625.7	587.4
52.5°	1008.0	870.8	675.1	554.4	519.7
55°	934.9	792.2	594.6	484.9	450.1
57.5°	860.0	713.5	523.3	420.9	391.5
60°	783.1	636.7	448.3	355.1	325.7
62.5°	708.2	561.8	384.2	296.4	281.8
65°	631.3	483.0	318.4	256.2	250.6
67.5°	558.1	409.8	256.2	225.0	219.6
70°	481.2	338.5	212.1	194.0	186.5
72.5°	408.1	272.6	177.4	162.9	159.1
75°	336.6	208.5	146.3	133.5	131.8
77.5°	265.4	148.1	115.3	107.9	104.3
80°	199.3	106.2	87.7	80.6	80.6
82.5°	139.0	71.4	60.3	56.7	56.7
85°	78.6	40.2	34.7	34.7	34.7
87.5°	29.4	14.6	14.6	12.8	12.8
90°	0.6	7.2	11.9	15.0	16.1
92.5°	15.0	12.6	14.3	15.6	16.1
95°	38.8	19.1	23.2	26.3	25.7
97.5°	69.9	21.0	30.4	32.3	32.9
100°	105.7	23.9	34.1	38.8	40.0
102.5°	145.1	144.0	35.2	41.7	43.6
105°	181.6	199.5	36.4	43.0	45.4
107.5°	224.0	238.9	37.7	44.2	46.6
110°	264.6	277.1	104.5	44.8	47.2

TEST NUMBER: P916145

CATALOG NUMBER: DFN2DIP-HX2F0-060D030US930-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	302.9	313.6	303.5	46.0	47.8
115°	343.4	353.6	368.5	92.0	49.0
117.5°	378.7	390.6	400.8	315.4	158.9
120°	418.1	427.1	437.8	445.0	364.4
122.5°	451.5	461.1	473.1	476.6	477.3
125°	485.6	493.3	504.8	508.9	510.7
127.5°	516.7	525.0	534.0	540.0	540.5
130°	545.9	555.5	562.1	568.6	568.1
132.5°	575.8	583.6	590.1	595.5	594.9
135°	600.9	610.5	615.8	621.8	620.6
137.5°	627.1	634.3	640.3	646.3	644.5
140°	652.8	657.6	664.1	669.5	666.6
142.5°	674.4	678.6	686.3	691.0	688.1
145°	697.1	696.4	706.6	710.8	707.8
147.5°	716.7	714.9	725.1	728.1	725.7
150°	735.9	731.7	741.3	744.8	741.8
152.5°	751.9	747.2	756.2	759.8	755.6
155°	767.5	762.2	769.3	772.9	768.2
157.5°	780.1	775.3	780.7	784.9	780.1
160°	790.8	787.3	790.8	794.4	790.2
162.5°	800.4	796.8	799.8	804.0	798.6
165°	808.7	805.2	807.0	811.1	807.0
167.5°	815.3	811.7	813.5	817.7	812.4
170°	820.7	817.1	818.3	822.5	817.1
172.5°	824.3	820.7	821.9	826.1	820.7
175°	827.2	823.0	824.3	828.4	822.5
177.5°	828.4	824.3	824.9	829.1	823.7
180°	825.5	825.5	825.5	825.5	825.5

TEST NUMBER: P916145

CATALOG NUMBER: DFN2DIP-HX2F0-060D030US930-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.59	14.54	14.43	15.40	16.47	9.57	10.52	10.41	11.38	12.45
	3H	15.25	16.10	16.10	16.97	18.07	10.75	11.60	11.61	12.47	13.57
	4H	15.84	16.65	16.72	17.52	18.63	11.19	12.00	12.07	12.87	13.98
	6H	16.25	16.99	17.13	17.87	19.00	11.51	12.25	12.39	13.13	14.25
	8H	16.37	17.07	17.26	17.97	19.10	11.59	12.30	12.48	13.20	14.32
	12H	16.43	17.10	17.32	17.99	19.14	11.63	12.30	12.53	13.20	14.34
4H	2H	13.61	14.42	14.49	15.29	16.40	10.17	10.97	11.04	11.84	12.95
	3H	15.43	16.09	16.31	17.00	18.12	11.51	12.17	12.39	13.08	14.21
	4H	16.10	16.71	17.00	17.61	18.77	12.04	12.65	12.94	13.55	14.71
	6H	16.60	17.12	17.51	18.05	19.21	12.45	12.97	13.37	13.90	15.06
	8H	16.76	17.25	17.68	18.17	19.34	12.57	13.06	13.49	13.98	15.15
	12H	16.85	17.29	17.79	18.23	19.40	12.63	13.07	13.57	14.01	15.19
8H	4H	16.08	16.56	16.99	17.49	18.65	12.32	12.81	13.23	13.73	14.89
	6H	16.62	17.02	17.56	17.99	19.15	12.82	13.22	13.76	14.18	15.35
	8H	16.82	17.18	17.77	18.13	19.31	13.00	13.35	13.95	14.31	15.49
	12H	16.95	17.26	17.90	18.21	19.44	13.11	13.42	14.06	14.37	15.60
12H	4H	16.03	16.47	16.97	17.41	18.58	12.32	12.76	13.26	13.70	14.88
	6H	16.59	16.95	17.55	17.91	19.09	12.86	13.22	13.81	14.17	15.36
	8H	16.80	17.12	17.76	18.06	19.30	13.06	13.38	14.02	14.32	15.56