

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P918809

Luminaire Tested: DFN2DIP-HX2F0-030D020US935-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P918809
REPORT IS A COMBINATION OF REPORTS P900674 AND P897595
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX2F0-030D020US935-RLLONL
Description: 2 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3900.3 lumens
Efficiency: N/A
Efficacy: 96.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 1.99' x L: 2.3' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 40.5
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9951
Total Harmonic Distortion (THDi): 0.07
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P918809

CATALOG NUMBER: DFN2DIP-HX2F0-030D020US935-RLLONL

Luminous Intensity Polar Plot

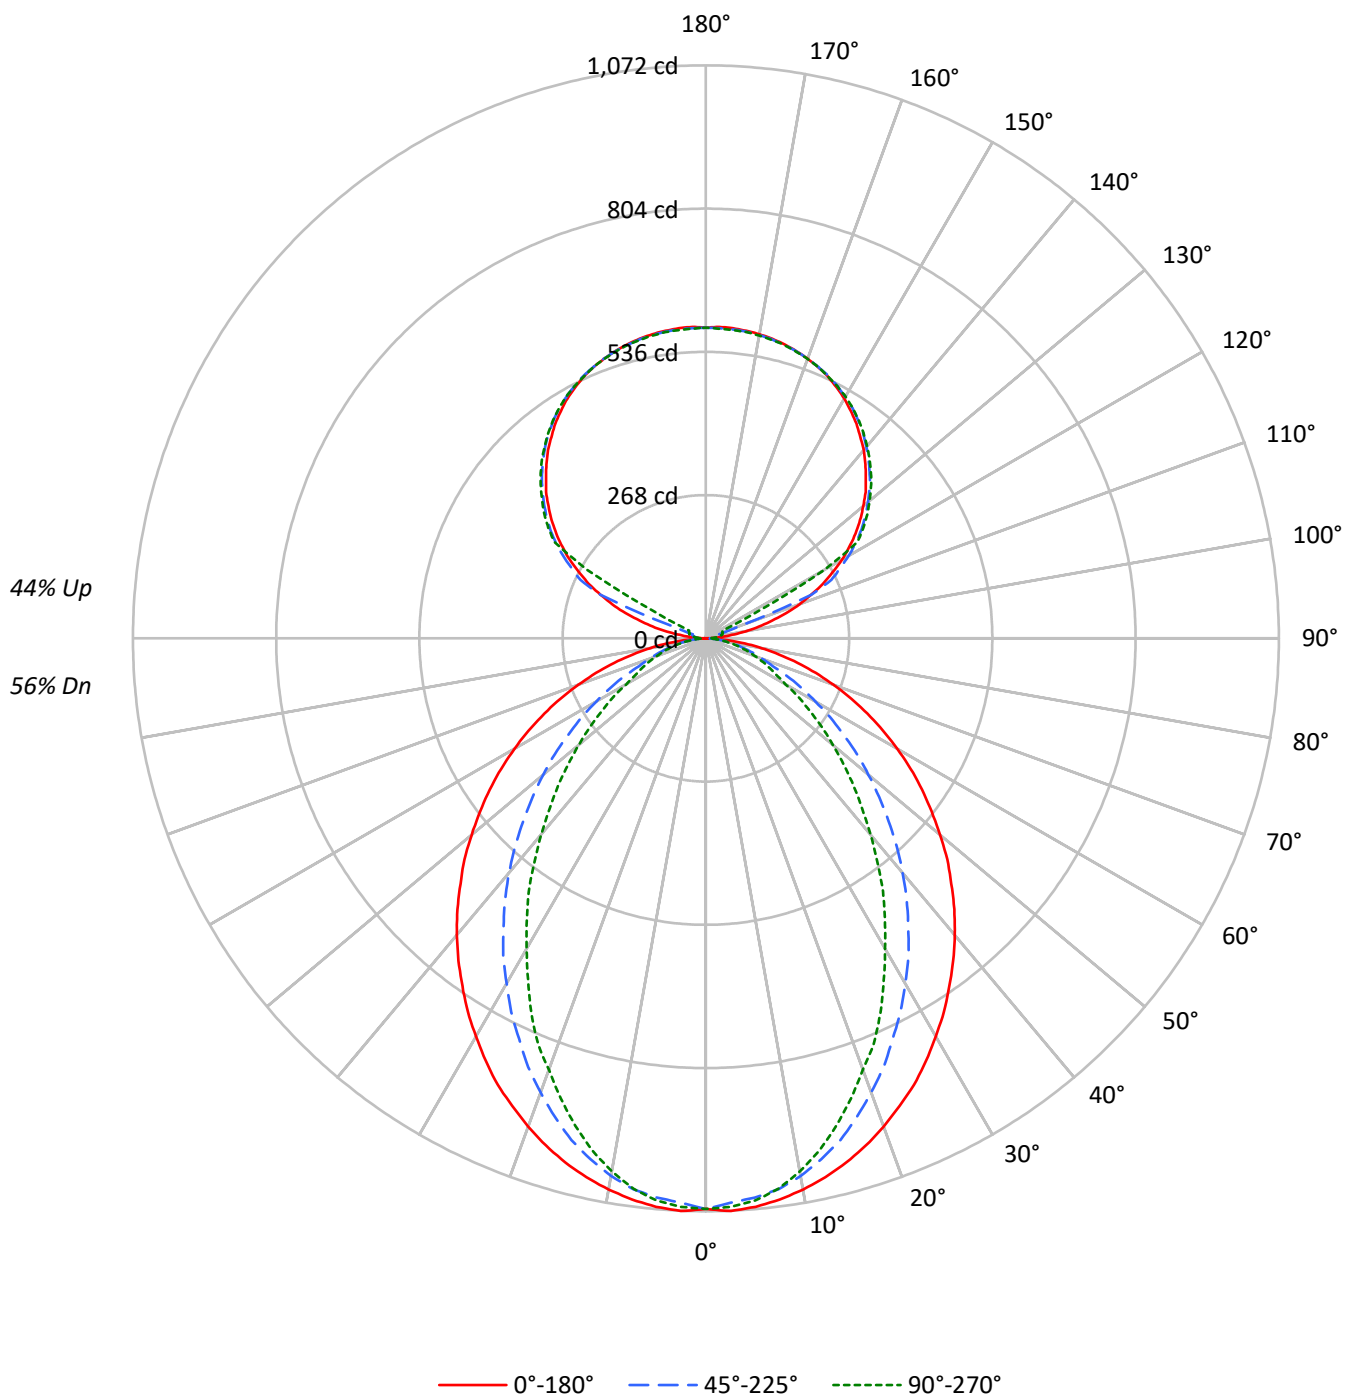

TEST NUMBER: P918809

CATALOG NUMBER: DFN2DIP-HX2F0-030D020US935-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	109	109	109	109		101	101	101	101		87	87	87		74	74	74		62	62	62
1	100	96	92	88		93	89	86	83		77	75	72		66	64	63		56	54	53
2	91	84	78	73		85	79	73	69		68	64	61		58	56	53		50	48	46
3	84	74	67	62		78	70	63	58		61	56	52		52	49	46		44	42	40
4	77	66	59	53		71	62	55	50		54	49	45		47	43	40		40	37	35
5	71	59	51	46		66	56	49	43		49	43	39		42	38	35		36	33	31
6	65	54	46	40		61	50	43	38		44	39	34		39	34	31		33	30	27
7	61	49	41	35		56	46	39	34		40	35	30		35	31	27		30	27	24
8	56	44	37	31		52	42	35	30		37	31	27		32	28	25		28	25	22
9	53	41	33	28		49	38	32	27		34	28	25		30	25	22		26	23	20
10	49	37	30	25		46	35	29	24		31	26	22		28	23	20		24	21	18

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2515	2515	2515
5°	2515	2470	2486
10°	2486	2415	2401
15°	2448	2329	2272
20°	2399	2214	2115
25°	2348	2085	1963
30°	2282	1954	1773
35°	2217	1814	1605
40°	2150	1669	1414
45°	2073	1510	1241
50°	1993	1349	1072
55°	1909	1178	911
60°	1812	1000	746
65°	1699	820	666
70°	1563	653	596
75°	1392	564	534
80°	1146	456	449
85°	749	281	314

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2073 cd/sqm

TEST NUMBER: P918809

CATALOG NUMBER: DFN2DIP-HX2F0-030D020US935-RLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	100.1	2.6
10°-20°	274.7	7.0
20°-30°	385.6	9.9
30°-40°	420.3	10.8
40°-50°	386.3	9.9
50°-60°	303.4	7.8
60°-70°	197.5	5.1
70°-80°	101.7	2.6
80°-90°	27.0	0.7
90°-100°	19.2	0.5
100°-110°	71.4	1.8
110°-120°	189.5	4.9
120°-130°	314.2	8.1
130°-140°	333.8	8.6
140°-150°	310.2	8.0
150°-160°	249.4	6.4
160°-170°	160.7	4.1
170°-180°	55.3	1.4
0°-30°	760.3	19.5
0°-40°	1180.7	30.3
0°-60°	1870.4	48.0
0°-90°	2196.5	56.3
90°-120°	280.0	7.2
90°-150°	1238.3	31.7
90°-180°	1704.0	43.7
0°-180°	3900.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1068	1068	1068	1068	1068	
5°	1068	1063	1050	1059	1056	101
15°	1015	1005	972	954	944	286
25°	922	891	827	787	773	424
35°	794	745	660	599	578	497
45°	649	584	483	414	391	501
55°	494	418	314	256	238	441
65°	333	255	168	135	132	330
75°	178	110	77	70	70	188
85°	42	21	18	18	18	48
90°	0	5	8	10	11	4
95°	27	13	16	18	18	32
105°	128	140	26	30	32	137
115°	242	249	260	65	34	238
125°	342	347	355	358	360	305
135°	423	430	434	438	437	327
145°	491	490	498	500	498	307
155°	540	537	542	544	541	249
165°	569	567	568	571	568	161
175°	582	580	580	583	579	55
180°	581	581	581	581	581	

TEST NUMBER: P918809

CATALOG NUMBER: DFN2DIP-HX2F0-030D020US935-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1067.6	1067.6	1067.6	1067.6	1067.6
2.5°	1072.4	1067.6	1056.9	1066.6	1064.7
5°	1067.6	1062.7	1050.2	1058.9	1055.9
7.5°	1058.9	1053.1	1039.6	1043.4	1038.5
10°	1047.2	1040.5	1021.2	1018.2	1012.5
12.5°	1032.8	1024.1	998.0	992.2	981.5
15°	1015.4	1004.7	971.9	953.6	943.9
17.5°	995.1	979.6	939.0	917.8	902.3
20°	971.9	952.5	904.2	880.2	858.8
22.5°	946.8	924.5	868.5	835.7	821.2
25°	921.7	890.7	827.0	787.4	772.8
27.5°	891.7	858.8	788.3	743.0	720.7
30°	859.9	823.1	745.8	696.6	670.5
32.5°	828.9	784.5	705.3	647.3	623.1
35°	794.2	744.8	659.9	599.0	577.7
37.5°	760.3	707.1	617.3	550.6	526.6
40°	724.6	666.7	572.9	504.3	479.2
42.5°	687.9	626.1	528.5	456.9	432.8
45°	649.3	584.4	483.1	414.4	391.2
47.5°	612.5	544.0	439.6	370.9	349.7
50°	572.0	503.3	397.1	330.4	310.1
52.5°	532.3	459.9	356.5	292.7	274.4
55°	493.6	418.3	313.9	256.1	237.7
57.5°	454.1	376.8	276.4	222.2	206.7
60°	413.5	336.2	236.7	187.4	172.0
62.5°	373.9	296.6	202.9	156.5	148.9
65°	333.3	255.0	168.1	135.3	132.3
67.5°	294.7	216.4	135.3	118.8	115.9
70°	254.1	178.7	112.0	102.4	98.5
72.5°	215.4	143.9	93.7	86.0	84.0
75°	177.7	110.1	77.3	70.5	69.6
77.5°	140.1	78.2	60.9	57.0	55.0
80°	105.3	56.1	46.3	42.5	42.5
82.5°	73.4	37.7	31.9	30.0	30.0
85°	41.5	21.2	18.3	18.3	18.3
87.5°	15.5	7.7	7.7	6.8	6.8
90°	0.4	5.1	8.4	10.5	11.4
92.5°	10.5	8.9	10.1	10.9	11.4
95°	27.3	13.4	16.4	18.5	18.1
97.5°	49.2	14.7	21.4	22.7	23.2
100°	74.5	16.8	23.9	27.3	28.2
102.5°	102.2	101.3	24.8	29.4	30.7
105°	127.9	140.4	25.7	30.2	31.9
107.5°	157.7	168.2	26.5	31.1	32.8
110°	186.3	195.1	73.6	31.6	33.2



TEST NUMBER: P918809

CATALOG NUMBER: DFN2DIP-HX2F0-030D020US935-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	213.2	220.8	213.6	32.4	33.7
115°	241.8	248.9	259.5	64.7	34.5
117.5°	266.6	275.0	282.1	222.1	111.8
120°	294.4	300.7	308.2	313.3	256.5
122.5°	317.9	324.6	333.0	335.5	336.0
125°	341.9	347.3	355.3	358.3	359.6
127.5°	363.8	369.6	376.0	380.1	380.6
130°	384.3	391.1	395.7	400.4	399.9
132.5°	405.4	410.9	415.4	419.2	418.9
135°	423.1	429.8	433.5	437.8	437.0
137.5°	441.5	446.6	450.8	455.0	453.7
140°	459.6	463.0	467.6	471.4	469.3
142.5°	474.8	477.8	483.2	486.5	484.4
145°	490.8	490.3	497.5	500.4	498.3
147.5°	504.6	503.3	510.5	512.6	510.9
150°	518.1	515.1	521.9	524.3	522.3
152.5°	529.4	526.1	532.4	534.9	531.9
155°	540.4	536.6	541.7	544.2	540.8
157.5°	549.2	545.9	549.7	552.6	549.2
160°	556.8	554.2	556.8	559.3	556.4
162.5°	563.4	560.9	563.1	566.0	562.2
165°	569.4	566.9	568.1	571.1	568.1
167.5°	574.0	571.4	572.7	575.7	571.9
170°	577.8	575.2	576.1	579.0	575.2
172.5°	580.3	577.8	578.7	581.6	577.8
175°	582.4	579.5	580.3	583.2	579.0
177.5°	583.2	580.3	580.7	583.7	579.9
180°	581.2	581.2	581.2	581.2	581.2

TEST NUMBER: P918809

CATALOG NUMBER: DFN2DIP-HX2F0-030D020US935-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.79	11.67	11.69	12.59	13.77	6.77	7.65	7.68	8.57	9.75
	3H	12.44	13.23	13.36	14.16	15.37	7.94	8.73	8.86	9.67	10.87
	4H	13.04	13.78	13.97	14.72	15.93	8.38	9.13	9.32	10.07	11.28
	6H	13.44	14.13	14.39	15.07	16.30	8.69	9.38	9.64	10.32	11.55
	8H	13.56	14.21	14.51	15.17	16.40	8.78	9.43	9.73	10.39	11.62
	12H	13.61	14.23	14.57	15.19	16.44	8.82	9.44	9.77	10.39	11.64
4H	2H	10.81	11.55	11.75	12.49	13.71	7.36	8.10	8.30	9.04	10.25
	3H	12.61	13.23	13.56	14.20	15.43	8.69	9.31	9.64	10.28	11.51
	4H	13.29	13.85	14.25	14.81	16.07	9.23	9.79	10.19	10.75	12.01
	6H	13.78	14.27	14.75	15.25	16.51	9.63	10.12	10.60	11.10	12.36
	8H	13.94	14.40	14.92	15.38	16.64	9.75	10.21	10.73	11.18	12.45
	12H	14.03	14.44	15.02	15.43	16.70	9.81	10.22	10.80	11.21	12.49
8H	4H	13.25	13.71	14.23	14.69	15.95	9.50	9.95	10.47	10.93	12.20
	6H	13.80	14.17	14.79	15.19	16.46	9.99	10.37	10.99	11.39	12.65
	8H	14.00	14.33	15.00	15.34	16.62	10.17	10.50	11.18	11.51	12.79
	12H	14.12	14.41	15.13	15.41	16.74	10.28	10.57	11.29	11.57	12.90
12H	4H	13.21	13.62	14.20	14.61	15.88	9.50	9.91	10.49	10.90	12.18
	6H	13.77	14.10	14.78	15.11	16.39	10.04	10.37	11.04	11.38	12.66
	8H	13.97	14.27	14.99	15.27	16.60	10.23	10.52	11.24	11.53	12.86