

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P918815

Luminaire Tested: DFN2DIP-HX2F0-030D040US935-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P918815
REPORT IS A COMBINATION OF REPORTS P900693 AND P897595
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX2F0-030D040US935-FLLONL
Description: 2 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5966.7 lumens
Efficiency: N/A
Efficacy: 109.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 1.99' x L: 2.3' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 54.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9951
Total Harmonic Distortion (THDi): 0.07
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P918815

CATALOG NUMBER: DFN2DIP-HX2F0-030D040US935-FLLONL

Luminous Intensity Polar Plot

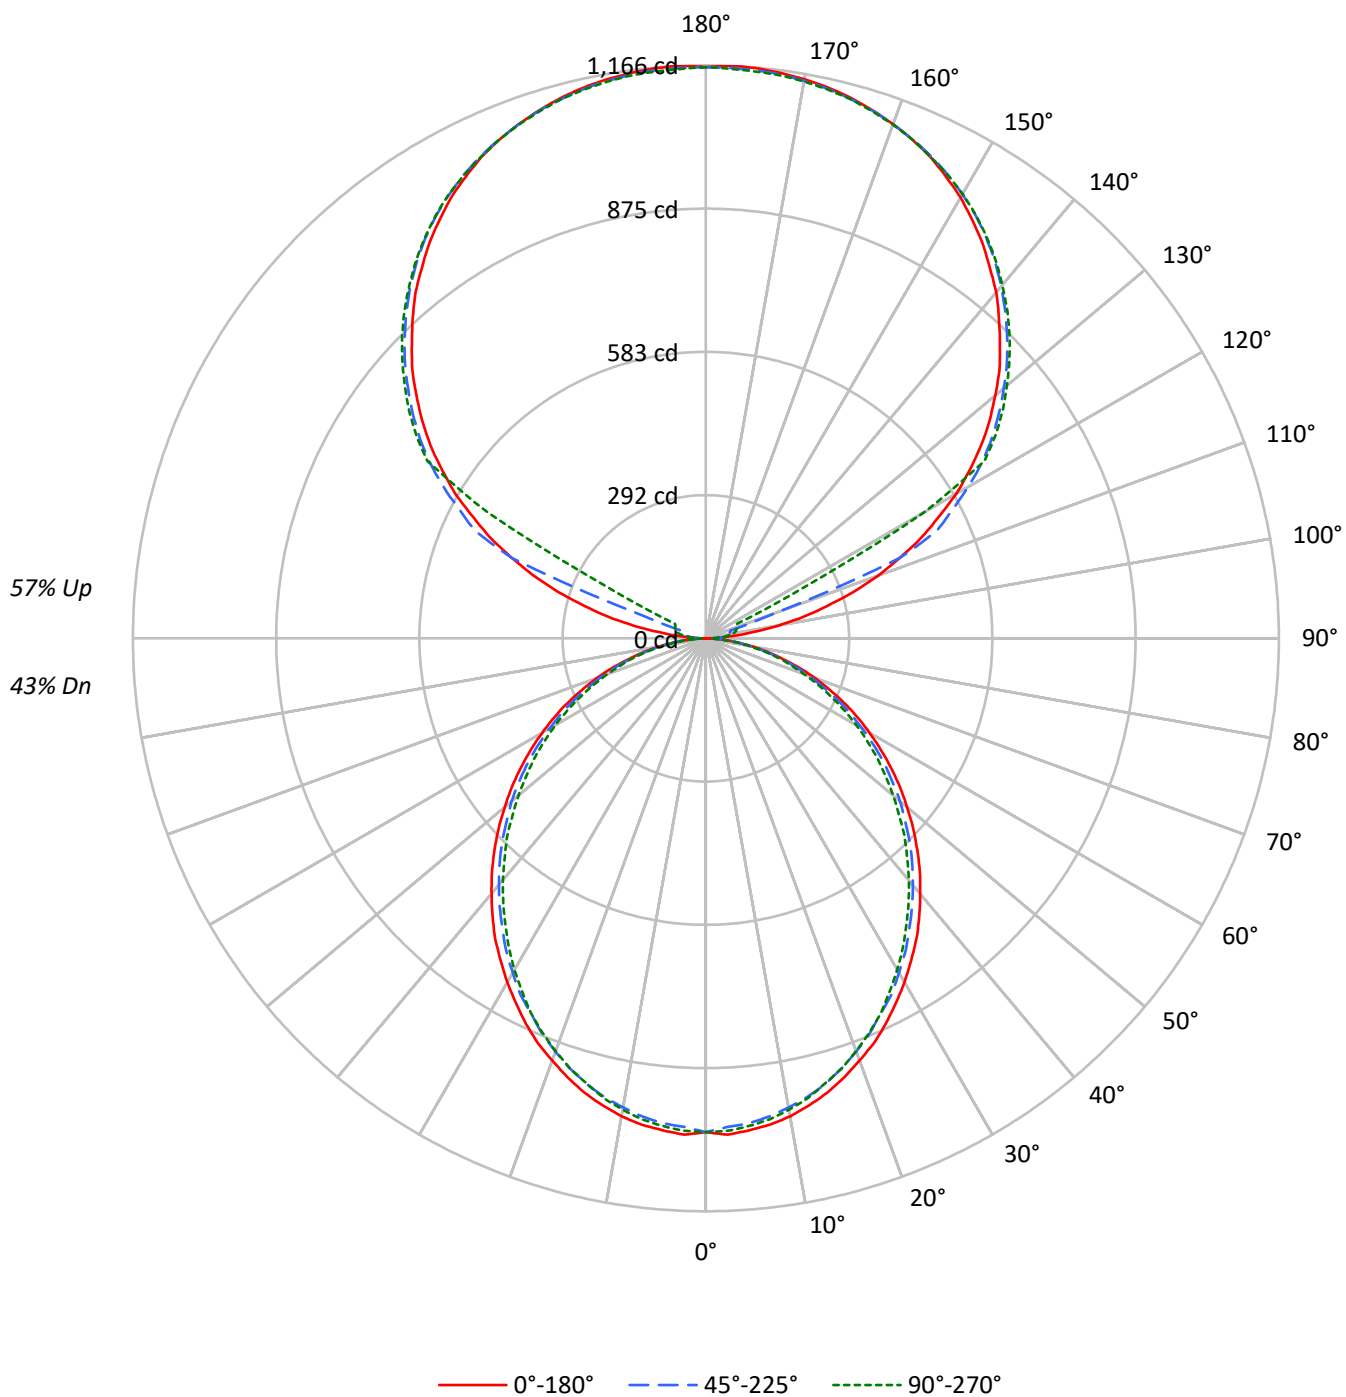

TEST NUMBER: P918815

CATALOG NUMBER: DFN2DIP-HX2F0-030D040US935-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	96	96	96	96	79	79	79	64	64	64	50	50	50
1	96	92	88	85	88	84	81	78	70	67	65	56	55	53	44	43	42
2	88	80	74	69	80	74	68	64	61	57	54	49	47	44	39	37	35
3	80	71	63	58	73	65	58	53	54	49	45	44	40	38	34	32	30
4	73	62	55	49	66	57	50	45	48	43	39	39	35	32	31	28	26
5	67	56	48	42	61	51	44	39	43	37	33	35	31	28	28	25	23
6	62	50	42	36	56	46	39	34	38	33	29	31	27	24	25	22	20
7	57	45	37	32	52	41	34	29	35	29	25	29	25	22	23	20	18
8	53	41	33	28	48	38	31	26	32	26	23	26	22	19	21	18	16
9	49	37	30	25	45	34	28	23	29	24	20	24	20	17	19	16	14
10	46	34	27	22	42	31	25	21	27	22	18	22	18	16	18	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2368	2368	2368
5°	2368	2329	2346
10°	2345	2292	2310
15°	2307	2249	2256
20°	2256	2191	2201
25°	2206	2123	2138
30°	2144	2059	2059
35°	2085	1984	1976
40°	2013	1909	1897
45°	1941	1833	1815
50°	1862	1753	1721
55°	1779	1661	1634
60°	1685	1552	1534
65°	1582	1439	1416
70°	1451	1301	1287
75°	1271	1135	1164
80°	1052	924	939
85°	715	580	580

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1941 cd/sqm

TEST NUMBER: P918815

CATALOG NUMBER: DFN2DIP-HX2F0-030D040US935-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	94.6	1.6
10°-20°	266.2	4.5
20°-30°	391.1	6.6
30°-40°	454.3	7.6
40°-50°	453.7	7.6
50°-60°	395.6	6.6
60°-70°	292.5	4.9
70°-80°	165.5	2.8
80°-90°	45.7	0.8
90°-100°	38.3	0.6
100°-110°	142.9	2.4
110°-120°	378.9	6.4
120°-130°	628.5	10.5
130°-140°	667.6	11.2
140°-150°	620.4	10.4
150°-160°	498.8	8.4
160°-170°	321.4	5.4
170°-180°	110.6	1.9
0°-30°	751.9	12.6
0°-40°	1206.2	20.2
0°-60°	2055.6	34.5
0°-90°	2559.2	42.9
90°-120°	560.1	9.4
90°-150°	2476.6	41.5
90°-180°	3407.0	57.1
0°-180°	5966.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1005	1005	1005	1005	1005	
5°	1005	1001	991	998	996	95
15°	957	951	938	942	938	269
25°	866	858	842	844	842	398
35°	747	737	722	716	711	467
45°	608	601	587	576	572	469
55°	460	454	443	431	426	411
65°	310	304	295	286	281	307
75°	162	160	156	150	152	173
85°	40	39	38	35	34	44
90°	1	10	17	21	23	5
95°	55	27	33	37	36	65
105°	256	281	51	60	64	273
115°	484	498	519	130	69	476
125°	684	695	711	717	719	610
135°	846	860	867	876	874	654
145°	982	981	995	1001	997	614
155°	1081	1073	1083	1088	1082	498
165°	1139	1134	1136	1142	1136	322
175°	1165	1159	1161	1166	1158	111
180°	1162	1162	1162	1162	1162	

TEST NUMBER: P918815

CATALOG NUMBER: DFN2DIP-HX2F0-030D040US935-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1005.0	1005.0	1005.0	1005.0	1005.0
2.5°	1010.9	1006.1	995.4	1005.0	1003.2
5°	1005.0	1001.3	990.6	998.3	996.4
7.5°	998.3	992.6	981.9	989.7	987.7
10°	987.7	980.9	969.4	977.1	974.2
12.5°	973.2	967.4	955.9	960.6	958.7
15°	956.7	951.1	938.4	942.3	937.5
17.5°	936.4	930.7	918.1	922.9	918.1
20°	914.2	908.4	894.9	897.8	894.0
22.5°	892.1	883.4	870.7	870.7	868.7
25°	865.9	858.2	841.8	843.7	841.8
27.5°	836.9	830.1	817.6	814.8	809.9
30°	808.0	800.2	785.7	782.8	778.9
32.5°	777.1	771.3	755.8	749.9	746.1
35°	747.1	737.4	721.9	716.1	711.3
37.5°	713.3	704.6	689.1	682.3	677.4
40°	678.5	670.7	655.2	646.6	642.7
42.5°	644.6	636.9	621.5	611.7	606.0
45°	608.0	601.1	586.6	576.0	572.1
47.5°	572.1	565.4	549.9	539.2	533.5
50°	534.4	529.6	516.1	502.6	497.7
52.5°	497.7	490.9	478.5	467.8	461.0
55°	460.1	454.3	442.6	431.1	426.3
57.5°	422.3	417.5	404.9	393.3	389.4
60°	384.6	380.8	367.3	356.6	353.8
62.5°	347.9	341.1	331.5	321.8	318.0
65°	310.3	304.4	294.8	286.1	281.3
67.5°	271.6	266.7	258.0	251.3	247.5
70°	235.8	232.0	223.3	216.5	212.7
72.5°	199.1	195.2	190.4	183.7	180.8
75°	162.3	160.5	155.6	149.8	151.8
77.5°	129.5	125.6	123.6	120.8	118.0
80°	96.7	95.7	93.7	90.8	88.9
82.5°	65.7	65.7	64.8	60.9	60.9
85°	39.6	38.7	37.7	34.8	33.8
87.5°	17.4	15.5	13.5	10.7	9.6
90°	0.8	10.1	16.8	21.1	22.6
92.5°	21.1	17.7	20.1	21.9	22.6
95°	54.6	26.9	32.7	37.0	36.2
97.5°	98.4	29.4	42.9	45.5	46.2
100°	148.9	33.7	48.0	54.6	56.3
102.5°	204.3	202.8	49.6	58.8	61.4
105°	255.6	280.9	51.3	60.5	63.9
107.5°	315.4	336.4	53.0	62.3	65.6
110°	372.6	390.2	147.2	63.1	66.4

TEST NUMBER: P918815

CATALOG NUMBER: DFN2DIP-HX2F0-030D040US935-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	426.5	441.5	427.2	64.7	67.3
115°	483.5	497.8	518.9	129.5	69.1
117.5°	533.2	550.0	564.4	444.0	223.7
120°	588.8	601.3	616.5	626.6	513.1
122.5°	635.8	649.3	666.2	671.1	672.0
125°	683.7	694.7	710.7	716.6	719.1
127.5°	727.5	739.3	751.9	760.3	761.1
130°	768.7	782.2	791.3	800.6	799.9
132.5°	810.7	821.7	830.9	838.5	837.8
135°	846.1	859.6	867.1	875.5	873.9
137.5°	883.0	893.1	901.6	910.0	907.5
140°	919.2	926.0	935.2	942.8	938.6
142.5°	949.6	955.4	966.4	973.0	968.9
145°	981.5	980.7	994.9	1000.8	996.6
147.5°	1009.2	1006.7	1021.0	1025.2	1021.9
150°	1036.1	1030.3	1043.8	1048.8	1044.6
152.5°	1058.9	1052.1	1064.7	1069.8	1063.9
155°	1080.7	1073.2	1083.3	1088.3	1081.6
157.5°	1098.4	1091.7	1099.3	1105.2	1098.4
160°	1113.5	1108.4	1113.5	1118.5	1112.7
162.5°	1127.0	1122.0	1126.2	1132.0	1124.5
165°	1138.8	1133.8	1136.3	1142.1	1136.3
167.5°	1148.1	1142.9	1145.6	1151.4	1143.8
170°	1155.6	1150.6	1152.2	1158.1	1150.6
172.5°	1160.6	1155.6	1157.4	1163.2	1155.6
175°	1164.8	1158.9	1160.6	1166.5	1158.1
177.5°	1166.5	1160.6	1161.5	1167.4	1159.9
180°	1162.3	1162.3	1162.3	1162.3	1162.3

TEST NUMBER: P918815

CATALOG NUMBER: DFN2DIP-HX2F0-030D040US935-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.44	10.24	10.45	11.26	12.63	9.01	9.81	10.03	10.84	12.21
	3H	11.07	11.78	12.09	12.82	14.21	10.61	11.32	11.63	12.36	13.75
	4H	11.63	12.31	12.67	13.35	14.75	11.18	11.86	12.21	12.89	14.29
	6H	12.01	12.64	13.06	13.68	15.09	11.55	12.18	12.60	13.22	14.63
	8H	12.10	12.70	13.16	13.76	15.16	11.65	12.24	12.70	13.30	14.71
	12H	12.14	12.71	13.20	13.76	15.19	11.68	12.25	12.74	13.30	14.73
4H	2H	9.88	10.56	10.92	11.60	12.99	9.54	10.22	10.59	11.26	12.65
	3H	11.71	12.28	12.76	13.34	14.75	11.33	11.90	12.38	12.96	14.37
	4H	12.40	12.92	13.46	13.98	15.41	12.01	12.53	13.07	13.59	15.02
	6H	12.89	13.34	13.96	14.42	15.84	12.50	12.94	13.57	14.02	15.45
	8H	13.03	13.44	14.10	14.52	15.96	12.63	13.05	13.70	14.12	15.56
	12H	13.09	13.46	14.17	14.55	16.00	12.68	13.06	13.77	14.14	15.59
8H	4H	12.58	13.00	13.65	14.07	15.52	12.23	12.65	13.30	13.72	15.16
	6H	13.18	13.53	14.28	14.64	16.08	12.83	13.18	13.92	14.29	15.73
	8H	13.39	13.69	14.49	14.79	16.24	13.03	13.33	14.13	14.43	15.89
	12H	13.50	13.77	14.60	14.86	16.36	13.13	13.40	14.23	14.49	15.99
12H	4H	12.56	12.94	13.65	14.03	15.47	12.22	12.60	13.31	13.68	15.13
	6H	13.21	13.51	14.31	14.61	16.07	12.87	13.17	13.97	14.27	15.72
	8H	13.43	13.69	14.53	14.79	16.28	13.08	13.35	14.19	14.44	15.94

END OF REPORT