

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P918817

Luminaire Tested: DFN2DIP-HX2F0-030D040US935-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P918817
REPORT IS A COMBINATION OF REPORTS P900694 AND P897595
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX2F0-030D040US935-RLONL
Description: 2 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5605.0 lumens
Efficiency: N/A
Efficacy: 102.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 1.99' x L: 2.3' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 54.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9951
Total Harmonic Distortion (THDi): 0.07
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P918817

CATALOG NUMBER: DFN2DIP-HX2F0-030D040US935-RLLONL

Luminous Intensity Polar Plot

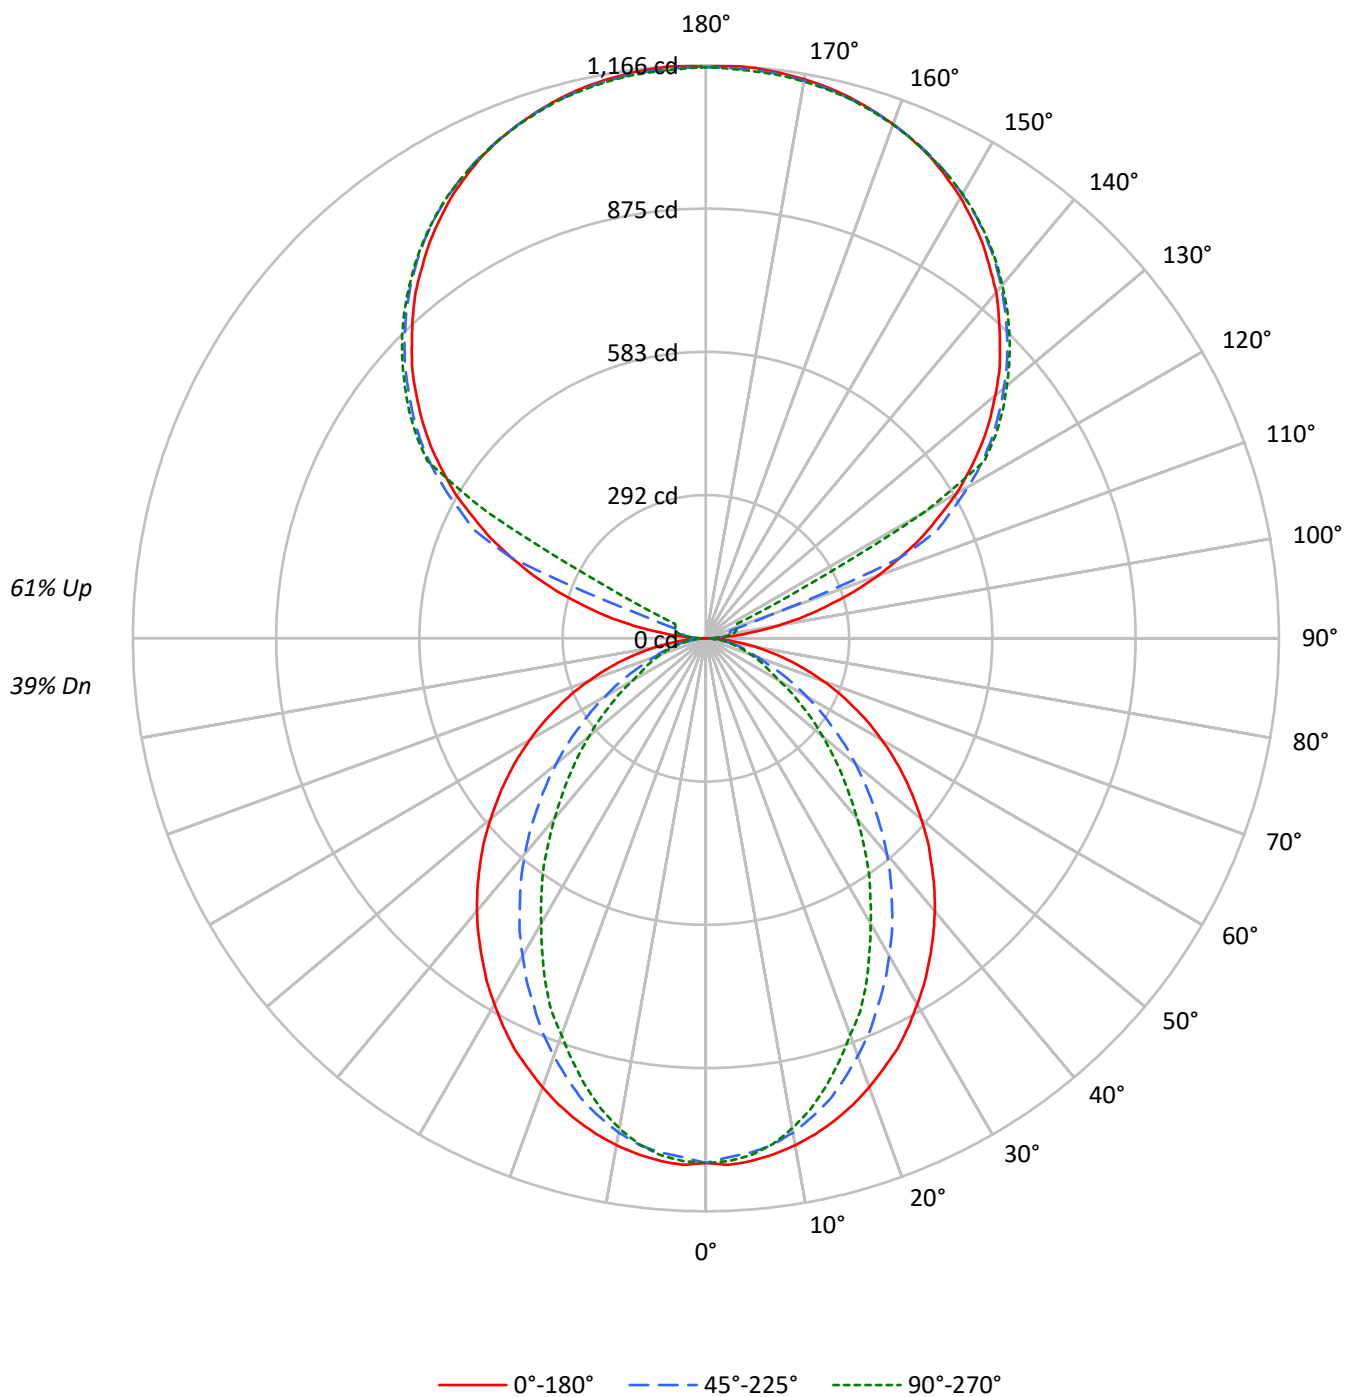

TEST NUMBER: P918817

CATALOG NUMBER: DFN2DIP-HX2F0-030D040US935-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	95	95	95	95	77	77	77	61	61	61	46	46	46
1	96	92	88	85	87	83	80	78	68	66	64	54	53	52	41	41	40
2	87	80	75	70	79	73	68	64	60	57	54	48	46	44	37	35	34
3	80	71	64	58	73	65	59	54	53	49	46	43	40	37	33	31	29
4	73	63	55	50	67	58	51	46	48	43	39	38	35	32	30	27	26
5	67	56	48	43	61	52	45	40	43	38	34	35	31	28	27	25	23
6	62	51	43	37	56	46	40	35	39	34	30	31	28	25	25	22	20
7	57	46	38	33	52	42	35	31	35	30	26	29	25	22	23	20	18
8	53	42	34	29	49	38	32	27	32	27	23	26	22	20	21	18	16
9	50	38	31	26	45	35	29	24	29	24	21	24	20	18	19	17	15
10	46	35	28	23	42	32	26	22	27	22	19	22	19	16	18	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2515	2515	2515
5°	2515	2470	2486
10°	2486	2415	2401
15°	2448	2329	2272
20°	2399	2214	2115
25°	2348	2085	1963
30°	2282	1954	1773
35°	2217	1814	1605
40°	2150	1669	1414
45°	2073	1510	1241
50°	1993	1349	1072
55°	1909	1178	911
60°	1812	1000	746
65°	1699	820	666
70°	1563	653	596
75°	1392	564	534
80°	1146	456	449
85°	749	281	314

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2073 cd/sqm

TEST NUMBER: P918817

CATALOG NUMBER: DFN2DIP-HX2F0-030D040US935-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	100.1	1.8
10°-20°	274.7	4.9
20°-30°	385.6	6.9
30°-40°	420.3	7.5
40°-50°	386.3	6.9
50°-60°	303.4	5.4
60°-70°	197.5	3.5
70°-80°	101.7	1.8
80°-90°	28.0	0.5
90°-100°	38.3	0.7
100°-110°	142.9	2.5
110°-120°	378.9	6.8
120°-130°	628.5	11.2
130°-140°	667.6	11.9
140°-150°	620.4	11.1
150°-160°	498.8	8.9
160°-170°	321.4	5.7
170°-180°	110.6	2.0
0°-30°	760.3	13.6
0°-40°	1180.7	21.1
0°-60°	1870.4	33.4
0°-90°	2197.6	39.2
90°-120°	560.1	10.0
90°-150°	2476.6	44.2
90°-180°	3407.0	60.8
0°-180°	5605.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1068	1068	1068	1068	1068	
5°	1068	1063	1050	1059	1056	101
15°	1015	1005	972	954	944	286
25°	922	891	827	787	773	424
35°	794	745	660	599	578	497
45°	649	584	483	414	391	501
55°	494	418	314	256	238	441
65°	333	255	168	135	132	330
75°	178	110	77	70	70	188
85°	42	21	18	18	18	48
90°	1	10	17	21	23	5
95°	55	27	33	37	36	65
105°	256	281	51	60	64	273
115°	484	498	519	130	69	476
125°	684	695	711	717	719	610
135°	846	860	867	876	874	654
145°	982	981	995	1001	997	614
155°	1081	1073	1083	1088	1082	498
165°	1139	1134	1136	1142	1136	322
175°	1165	1159	1161	1166	1158	111
180°	1162	1162	1162	1162	1162	

TEST NUMBER: P918817

CATALOG NUMBER: DFN2DIP-HX2F0-030D040US935-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1067.6	1067.6	1067.6	1067.6	1067.6
2.5°	1072.4	1067.6	1056.9	1066.6	1064.7
5°	1067.6	1062.7	1050.2	1058.9	1055.9
7.5°	1058.9	1053.1	1039.6	1043.4	1038.5
10°	1047.2	1040.5	1021.2	1018.2	1012.5
12.5°	1032.8	1024.1	998.0	992.2	981.5
15°	1015.4	1004.7	971.9	953.6	943.9
17.5°	995.1	979.6	939.0	917.8	902.3
20°	971.9	952.5	904.2	880.2	858.8
22.5°	946.8	924.5	868.5	835.7	821.2
25°	921.7	890.7	827.0	787.4	772.8
27.5°	891.7	858.8	788.3	743.0	720.7
30°	859.9	823.1	745.8	696.6	670.5
32.5°	828.9	784.5	705.3	647.3	623.1
35°	794.2	744.8	659.9	599.0	577.7
37.5°	760.3	707.1	617.3	550.6	526.6
40°	724.6	666.7	572.9	504.3	479.2
42.5°	687.9	626.1	528.5	456.9	432.8
45°	649.3	584.4	483.1	414.4	391.2
47.5°	612.5	544.0	439.6	370.9	349.7
50°	572.0	503.3	397.1	330.4	310.1
52.5°	532.3	459.9	356.5	292.7	274.4
55°	493.6	418.3	313.9	256.1	237.7
57.5°	454.1	376.8	276.4	222.2	206.7
60°	413.5	336.2	236.7	187.4	172.0
62.5°	373.9	296.6	202.9	156.5	148.9
65°	333.3	255.0	168.1	135.3	132.3
67.5°	294.7	216.4	135.3	118.8	115.9
70°	254.1	178.7	112.0	102.4	98.5
72.5°	215.4	143.9	93.7	86.0	84.0
75°	177.7	110.1	77.3	70.5	69.6
77.5°	140.1	78.2	60.9	57.0	55.0
80°	105.3	56.1	46.3	42.5	42.5
82.5°	73.4	37.7	31.9	30.0	30.0
85°	41.5	21.2	18.3	18.3	18.3
87.5°	15.5	7.7	7.7	6.8	6.8
90°	0.8	10.1	16.8	21.1	22.6
92.5°	21.1	17.7	20.1	21.9	22.6
95°	54.6	26.9	32.7	37.0	36.2
97.5°	98.4	29.4	42.9	45.5	46.2
100°	148.9	33.7	48.0	54.6	56.3
102.5°	204.3	202.8	49.6	58.8	61.4
105°	255.6	280.9	51.3	60.5	63.9
107.5°	315.4	336.4	53.0	62.3	65.6
110°	372.6	390.2	147.2	63.1	66.4

TEST NUMBER: P918817

CATALOG NUMBER: DFN2DIP-HX2F0-030D040US935-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	426.5	441.5	427.2	64.7	67.3
115°	483.5	497.8	518.9	129.5	69.1
117.5°	533.2	550.0	564.4	444.0	223.7
120°	588.8	601.3	616.5	626.6	513.1
122.5°	635.8	649.3	666.2	671.1	672.0
125°	683.7	694.7	710.7	716.6	719.1
127.5°	727.5	739.3	751.9	760.3	761.1
130°	768.7	782.2	791.3	800.6	799.9
132.5°	810.7	821.7	830.9	838.5	837.8
135°	846.1	859.6	867.1	875.5	873.9
137.5°	883.0	893.1	901.6	910.0	907.5
140°	919.2	926.0	935.2	942.8	938.6
142.5°	949.6	955.4	966.4	973.0	968.9
145°	981.5	980.7	994.9	1000.8	996.6
147.5°	1009.2	1006.7	1021.0	1025.2	1021.9
150°	1036.1	1030.3	1043.8	1048.8	1044.6
152.5°	1058.9	1052.1	1064.7	1069.8	1063.9
155°	1080.7	1073.2	1083.3	1088.3	1081.6
157.5°	1098.4	1091.7	1099.3	1105.2	1098.4
160°	1113.5	1108.4	1113.5	1118.5	1112.7
162.5°	1127.0	1122.0	1126.2	1132.0	1124.5
165°	1138.8	1133.8	1136.3	1142.1	1136.3
167.5°	1148.1	1142.9	1145.6	1151.4	1143.8
170°	1155.6	1150.6	1152.2	1158.1	1150.6
172.5°	1160.6	1155.6	1157.4	1163.2	1155.6
175°	1164.8	1158.9	1160.6	1166.5	1158.1
177.5°	1166.5	1160.6	1161.5	1167.4	1159.9
180°	1162.3	1162.3	1162.3	1162.3	1162.3

TEST NUMBER: P918817

CATALOG NUMBER: DFN2DIP-HX2F0-030D040US935-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.12	9.87	10.17	10.92	12.34	5.10	5.85	6.15	6.90	8.32
	3H	10.76	11.43	11.82	12.49	13.93	6.26	6.93	7.32	7.99	9.43
	4H	11.35	11.98	12.42	13.05	14.49	6.70	7.33	7.77	8.39	9.84
	6H	11.75	12.33	12.83	13.40	14.85	7.00	7.58	8.08	8.65	10.11
	8H	11.86	12.42	12.95	13.50	14.95	7.08	7.64	8.17	8.72	10.17
	12H	11.91	12.44	13.00	13.51	14.99	7.11	7.64	8.20	8.72	10.19
4H	2H	9.12	9.76	10.20	10.82	12.26	5.67	6.30	6.75	7.37	8.81
	3H	10.91	11.44	12.00	12.53	13.99	6.99	7.52	8.08	8.61	10.07
	4H	11.58	12.07	12.67	13.15	14.63	7.52	8.01	8.61	9.09	10.57
	6H	12.07	12.48	13.17	13.59	15.06	7.92	8.33	9.02	9.44	10.91
	8H	12.23	12.62	13.33	13.71	15.20	8.04	8.42	9.14	9.52	11.01
	12H	12.31	12.66	13.42	13.77	15.26	8.09	8.44	9.20	9.55	11.04
8H	4H	11.54	11.93	12.64	13.02	14.51	7.78	8.17	8.88	9.26	10.75
	6H	12.08	12.40	13.20	13.53	15.02	8.27	8.59	9.39	9.73	11.22
	8H	12.28	12.56	13.40	13.67	15.18	8.45	8.73	9.58	9.85	11.36
	12H	12.39	12.64	13.52	13.75	15.30	8.55	8.80	9.68	9.91	11.46
12H	4H	11.49	11.84	12.60	12.95	14.44	7.78	8.13	8.89	9.24	10.73
	6H	12.05	12.33	13.18	13.45	14.95	8.32	8.60	9.44	9.71	11.22
	8H	12.25	12.50	13.38	13.61	15.15	8.51	8.75	9.64	9.87	11.41