

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P918837

Luminaire Tested: DFN2DIP-HX2F0-040D040US935-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P918837
REPORT IS A COMBINATION OF REPORTS P900696 AND P897595
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX2F0-040D040US935-RLLONL
Description: 2 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6336.9 lumens
Efficiency: N/A
Efficacy: 96.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 1.99' x L: 2.3' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 65.4
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P918837

CATALOG NUMBER: DFN2DIP-HX2F0-040D040US935-RLLONL

Luminous Intensity Polar Plot

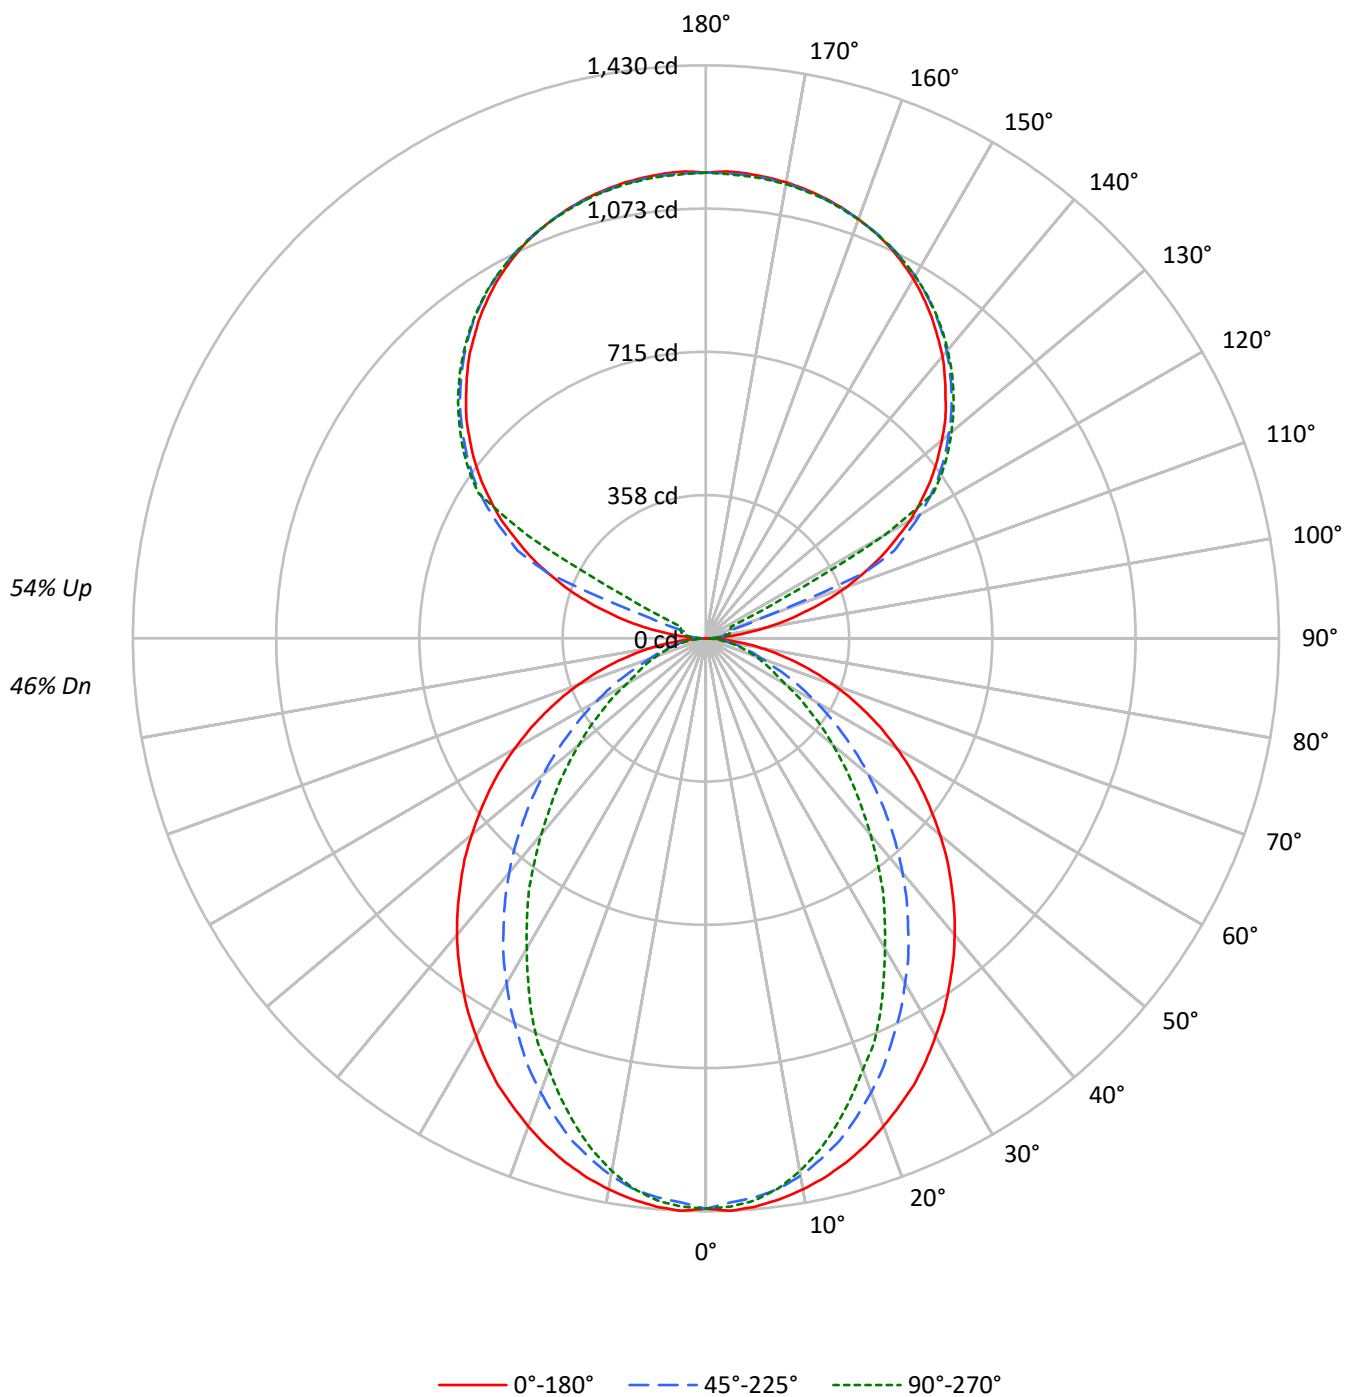

TEST NUMBER: P918837

CATALOG NUMBER: DFN2DIP-HX2F0-040D040US935-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	98	98	98	98	81	81	81	66	66	66	53	53	53
1	97	93	90	86	89	86	83	80	72	70	68	59	58	56	47	46	45
2	89	82	76	71	82	76	70	66	63	60	57	52	50	48	42	40	39
3	81	72	65	60	75	67	61	56	56	52	48	47	43	41	38	35	34
4	75	64	57	51	68	60	53	48	50	45	41	42	38	35	34	31	29
5	69	58	50	44	63	53	46	41	45	40	36	38	34	31	31	28	26
6	63	52	44	38	58	48	41	36	41	36	32	34	30	27	28	25	23
7	59	47	39	34	54	44	37	32	37	32	28	31	27	24	26	23	21
8	55	43	35	30	50	40	33	28	34	29	25	29	25	22	24	21	19
9	51	39	32	27	47	36	30	25	31	26	22	27	23	20	22	19	17
10	48	36	29	24	44	33	27	23	29	24	20	25	21	18	20	18	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3354	3354	3354
5°	3354	3293	3316
10°	3315	3220	3201
15°	3264	3106	3029
20°	3199	2952	2820
25°	3131	2780	2617
30°	3043	2606	2364
35°	2956	2419	2140
40°	2867	2226	1886
45°	2764	2013	1655
50°	2657	1798	1430
55°	2545	1571	1215
60°	2416	1334	994
65°	2266	1094	888
70°	2085	871	795
75°	1855	752	711
80°	1527	608	599
85°	1000	377	421

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2764 cd/sqm

TEST NUMBER: P918837

CATALOG NUMBER: DFN2DIP-HX2F0-040D040US935-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	133.4	2.1
10°-20°	366.2	5.8
20°-30°	514.2	8.1
30°-40°	560.5	8.8
40°-50°	515.1	8.1
50°-60°	404.5	6.4
60°-70°	263.3	4.2
70°-80°	135.6	2.1
80°-90°	36.6	0.6
90°-100°	38.3	0.6
100°-110°	142.9	2.3
110°-120°	378.9	6.0
120°-130°	628.5	9.9
130°-140°	667.6	10.5
140°-150°	620.4	9.8
150°-160°	498.8	7.9
160°-170°	321.4	5.1
170°-180°	110.6	1.7
0°-30°	1013.8	16.0
0°-40°	1574.2	24.8
0°-60°	2493.9	39.4
0°-90°	2929.4	46.2
90°-120°	560.1	8.8
90°-150°	2476.6	39.1
90°-180°	3407.0	53.8
0°-180°	6336.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1423	1423	1423	1423	1423	
5°	1423	1417	1400	1412	1408	135
15°	1354	1340	1296	1271	1259	382
25°	1229	1188	1103	1050	1030	565
35°	1059	993	880	799	770	663
45°	866	779	644	553	522	668
55°	658	558	419	341	317	588
65°	444	340	224	180	176	441
75°	237	147	103	94	93	251
85°	55	28	24	24	24	64
90°	1	10	17	21	23	6
95°	55	27	33	37	36	65
105°	256	281	51	60	64	273
115°	484	498	519	130	69	476
125°	684	695	711	717	719	610
135°	846	860	867	876	874	654
145°	982	981	995	1001	997	614
155°	1081	1073	1083	1088	1082	498
165°	1139	1134	1136	1142	1136	322
175°	1165	1159	1161	1166	1158	111
180°	1162	1162	1162	1162	1162	

TEST NUMBER: P918837

CATALOG NUMBER: DFN2DIP-HX2F0-040D040US935-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1423.4	1423.4	1423.4	1423.4	1423.4
2.5°	1429.9	1423.4	1409.2	1422.2	1419.5
5°	1423.4	1416.9	1400.2	1411.8	1408.0
7.5°	1411.8	1404.1	1386.1	1391.1	1384.7
10°	1396.4	1387.3	1361.6	1357.6	1350.0
12.5°	1377.1	1365.5	1330.6	1322.9	1308.7
15°	1353.8	1339.6	1295.9	1271.4	1258.6
17.5°	1326.8	1306.1	1252.0	1223.7	1203.1
20°	1295.9	1270.1	1205.7	1173.5	1145.1
22.5°	1262.4	1232.8	1158.0	1114.2	1095.0
25°	1228.9	1187.7	1102.6	1049.9	1030.4
27.5°	1189.0	1145.1	1051.1	990.6	960.9
30°	1146.5	1097.4	994.4	928.8	894.0
32.5°	1105.3	1045.9	940.4	863.1	830.8
35°	1058.9	993.2	879.9	798.7	770.2
37.5°	1013.8	942.9	823.1	734.2	702.1
40°	966.1	888.9	763.9	672.4	638.9
42.5°	917.1	834.7	704.6	609.2	577.1
45°	865.6	779.3	644.1	552.6	521.7
47.5°	816.7	725.3	586.2	494.6	466.3
50°	762.6	671.1	529.4	440.5	413.5
52.5°	709.7	613.1	475.4	390.3	365.8
55°	658.2	557.8	418.6	341.4	316.9
57.5°	605.5	502.4	368.4	296.3	275.7
60°	551.3	448.2	315.6	249.9	229.4
62.5°	498.6	395.5	270.4	208.7	198.5
65°	444.4	340.0	224.1	180.4	176.4
67.5°	393.0	288.5	180.4	158.4	154.5
70°	338.8	238.3	149.4	136.6	131.3
72.5°	287.3	191.9	124.9	114.7	112.1
75°	236.9	146.8	103.1	94.0	92.8
77.5°	186.8	104.3	81.2	76.0	73.4
80°	140.3	74.7	61.7	56.7	56.7
82.5°	97.9	50.3	42.5	39.9	39.9
85°	55.4	28.3	24.5	24.5	24.5
87.5°	20.7	10.2	10.2	9.0	9.0
90°	0.8	10.1	16.8	21.1	22.6
92.5°	21.1	17.7	20.1	21.9	22.6
95°	54.6	26.9	32.7	37.0	36.2
97.5°	98.4	29.4	42.9	45.5	46.2
100°	148.9	33.7	48.0	54.6	56.3
102.5°	204.3	202.8	49.6	58.8	61.4
105°	255.6	280.9	51.3	60.5	63.9
107.5°	315.4	336.4	53.0	62.3	65.6
110°	372.6	390.2	147.2	63.1	66.4

TEST NUMBER: P918837

CATALOG NUMBER: DFN2DIP-HX2F0-040D040US935-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	426.5	441.5	427.2	64.7	67.3
115°	483.5	497.8	518.9	129.5	69.1
117.5°	533.2	550.0	564.4	444.0	223.7
120°	588.8	601.3	616.5	626.6	513.1
122.5°	635.8	649.3	666.2	671.1	672.0
125°	683.7	694.7	710.7	716.6	719.1
127.5°	727.5	739.3	751.9	760.3	761.1
130°	768.7	782.2	791.3	800.6	799.9
132.5°	810.7	821.7	830.9	838.5	837.8
135°	846.1	859.6	867.1	875.5	873.9
137.5°	883.0	893.1	901.6	910.0	907.5
140°	919.2	926.0	935.2	942.8	938.6
142.5°	949.6	955.4	966.4	973.0	968.9
145°	981.5	980.7	994.9	1000.8	996.6
147.5°	1009.2	1006.7	1021.0	1025.2	1021.9
150°	1036.1	1030.3	1043.8	1048.8	1044.6
152.5°	1058.9	1052.1	1064.7	1069.8	1063.9
155°	1080.7	1073.2	1083.3	1088.3	1081.6
157.5°	1098.4	1091.7	1099.3	1105.2	1098.4
160°	1113.5	1108.4	1113.5	1118.5	1112.7
162.5°	1127.0	1122.0	1126.2	1132.0	1124.5
165°	1138.8	1133.8	1136.3	1142.1	1136.3
167.5°	1148.1	1142.9	1145.6	1151.4	1143.8
170°	1155.6	1150.6	1152.2	1158.1	1150.6
172.5°	1160.6	1155.6	1157.4	1163.2	1155.6
175°	1164.8	1158.9	1160.6	1166.5	1158.1
177.5°	1166.5	1160.6	1161.5	1167.4	1159.9
180°	1162.3	1162.3	1162.3	1162.3	1162.3

TEST NUMBER: P918837

CATALOG NUMBER: DFN2DIP-HX2F0-040D040US935-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.85	11.65	11.85	12.65	13.98	6.83	7.63	7.83	8.64	9.96
	3H	12.50	13.22	13.51	14.23	15.58	8.00	8.72	9.01	9.73	11.08
	4H	13.09	13.77	14.11	14.78	16.14	8.44	9.12	9.46	10.13	11.49
	6H	13.49	14.11	14.52	15.13	16.50	8.75	9.37	9.77	10.39	11.76
	8H	13.61	14.20	14.64	15.23	16.60	8.83	9.42	9.86	10.45	11.82
	12H	13.66	14.22	14.70	15.25	16.64	8.86	9.43	9.90	10.45	11.84
4H	2H	10.86	11.54	11.89	12.55	13.91	7.41	8.09	8.44	9.10	10.46
	3H	12.66	13.22	13.69	14.27	15.63	8.74	9.30	9.77	10.34	11.71
	4H	13.33	13.85	14.37	14.88	16.27	9.27	9.79	10.31	10.82	12.21
	6H	13.82	14.26	14.87	15.32	16.71	9.67	10.11	10.72	11.17	12.56
	8H	13.98	14.39	15.03	15.44	16.85	9.79	10.20	10.84	11.25	12.65
	12H	14.06	14.43	15.13	15.50	16.91	9.84	10.22	10.91	11.28	12.69
8H	4H	13.29	13.71	14.34	14.76	16.16	9.53	9.95	10.59	11.00	12.40
	6H	13.83	14.17	14.90	15.26	16.66	10.03	10.37	11.10	11.46	12.86
	8H	14.03	14.33	15.11	15.41	16.83	10.21	10.50	11.29	11.58	13.00
	12H	14.15	14.41	15.23	15.49	16.95	10.31	10.57	11.39	11.64	13.10
12H	4H	13.24	13.61	14.31	14.68	16.09	9.53	9.91	10.60	10.97	12.38
	6H	13.80	14.10	14.89	15.18	16.60	10.07	10.37	11.15	11.45	12.87
	8H	14.01	14.27	15.09	15.34	16.80	10.26	10.53	11.35	11.60	13.06