

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P918839

Luminaire Tested: DFN2DIP-HX2F0-040D050US935-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P918839
REPORT IS A COMBINATION OF REPORTS P900705 AND P897595
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX2F0-040D050US935-FLLONL
Description: 2 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7671.5 lumens
Efficiency: N/A
Efficacy: 103.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 1.99' x L: 2.3' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 74.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P918839
CATALOG NUMBER: DFN2DIP-HX2F0-040D050US935-FLLONL

Luminous Intensity Polar Plot

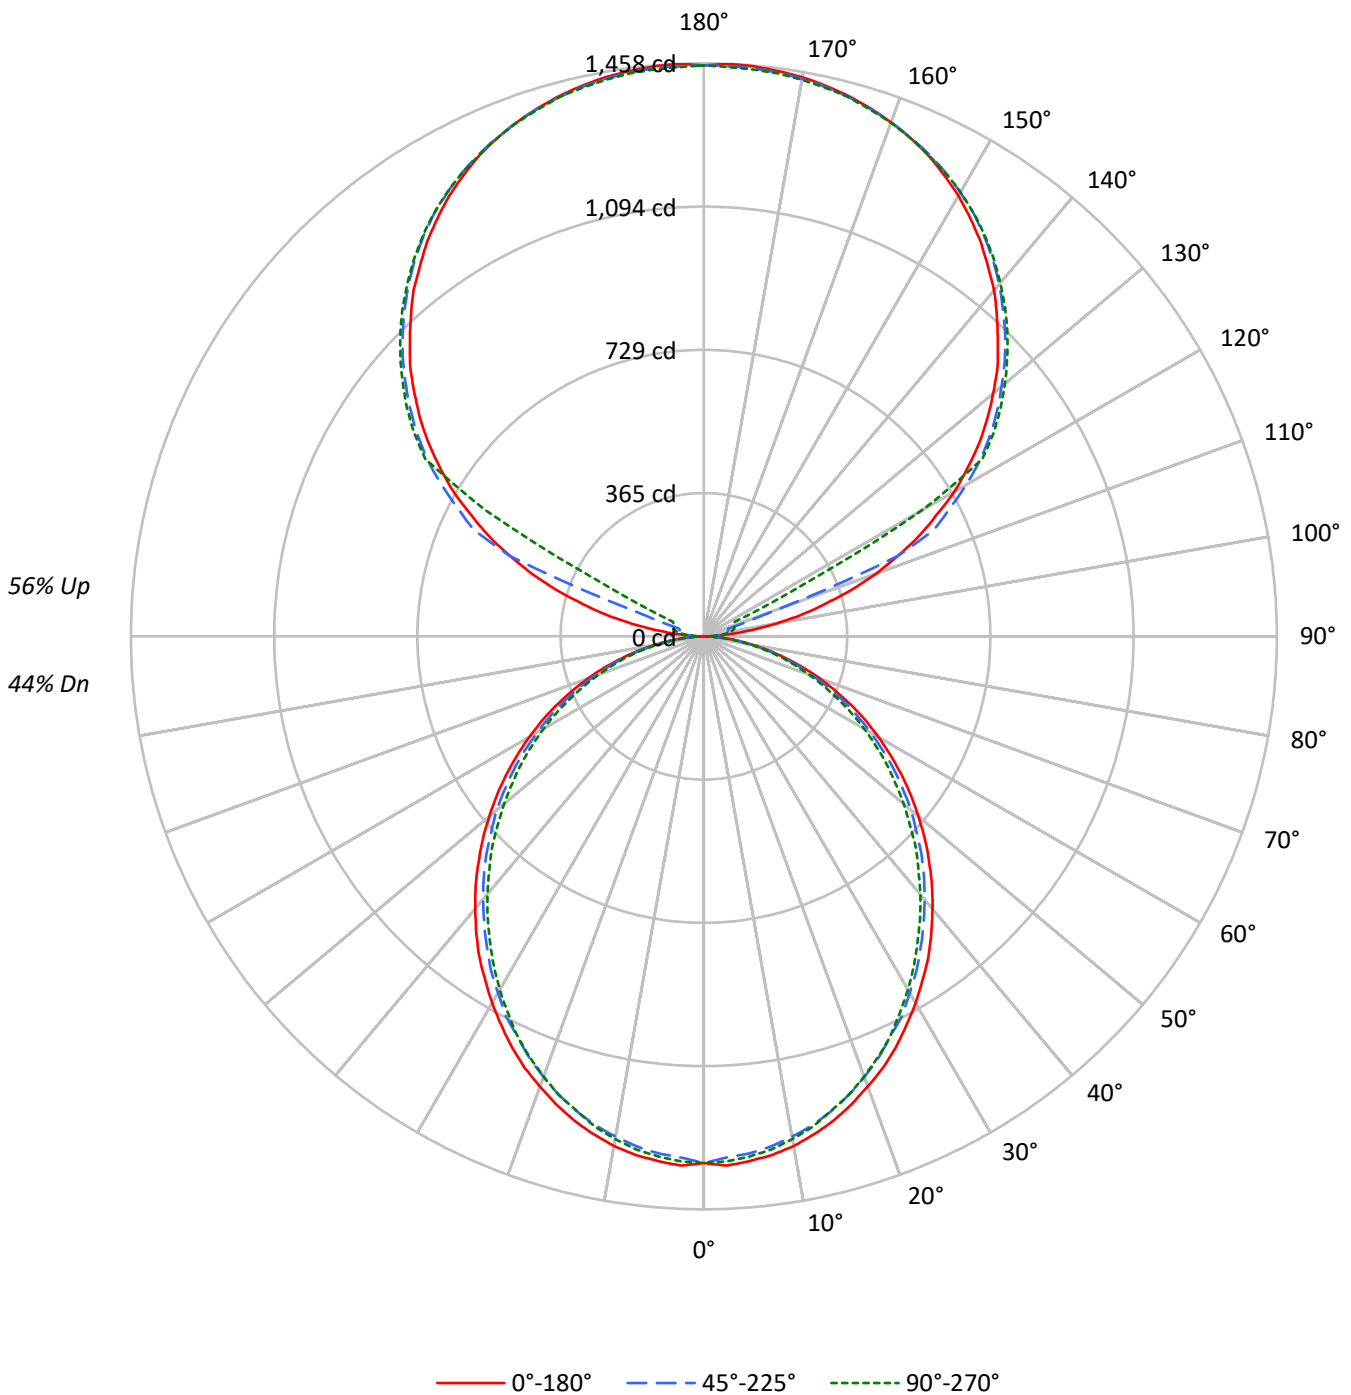



TEST NUMBER: P918839

CATALOG NUMBER: DFN2DIP-HX2F0-040D050US935-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	51	51	51	44				44
1	97	92	88	85	88	85	81	78	70	68	66	57	56	54	45	44	43	37				37
2	88	81	74	69	80	74	69	64	62	58	55	50	48	45	40	38	36	31				31
3	80	71	64	58	73	65	59	54	54	50	46	44	41	38	35	33	31	27				27
4	73	63	55	49	67	58	51	46	48	43	39	40	36	33	31	29	27	23				23
5	67	56	48	42	61	51	44	39	43	38	34	35	31	28	28	25	23	20				20
6	62	50	42	36	57	46	39	34	39	33	29	32	28	25	26	23	20	17				17
7	57	45	37	32	52	42	35	30	35	30	26	29	25	22	23	20	18	15				15
8	53	41	33	28	49	38	31	26	32	27	23	27	23	20	22	19	16	14				14
9	49	37	30	25	45	35	28	23	29	24	20	25	20	18	20	17	15	12				12
10	46	34	27	22	42	32	25	21	27	22	18	23	19	16	18	15	13	11				11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3157	3157	3157
5°	3157	3106	3129
10°	3127	3057	3080
15°	3076	2999	3009
20°	3009	2921	2935
25°	2942	2830	2851
30°	2859	2745	2746
35°	2780	2646	2635
40°	2685	2545	2529
45°	2588	2444	2420
50°	2483	2337	2295
55°	2373	2215	2178
60°	2247	2070	2045
65°	2109	1918	1888
70°	1934	1734	1716
75°	1695	1513	1551
80°	1403	1231	1252
85°	953	773	774

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2588 cd/sqm



TEST NUMBER: P918839

CATALOG NUMBER: DFN2DIP-HX2F0-040D050US935-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	126.1	1.6
10°-20°	354.9	4.6
20°-30°	521.5	6.8
30°-40°	605.7	7.9
40°-50°	605.0	7.9
50°-60°	527.5	6.9
60°-70°	389.9	5.1
70°-80°	220.6	2.9
80°-90°	60.8	0.8
90°-100°	47.9	0.6
100°-110°	178.6	2.3
110°-120°	473.7	6.2
120°-130°	785.6	10.2
130°-140°	834.5	10.9
140°-150°	775.6	10.1
150°-160°	623.5	8.1
160°-170°	401.8	5.2
170°-180°	138.3	1.8
0°-30°	1002.5	13.1
0°-40°	1608.3	21.0
0°-60°	2740.7	35.7
0°-90°	3412.1	44.5
90°-120°	700.2	9.1
90°-150°	3095.8	40.4
90°-180°	4259.0	55.5
0°-180°	7671.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1340	1340	1340	1340	1340	
5°	1340	1335	1321	1331	1329	127
15°	1276	1268	1251	1256	1250	359
25°	1154	1144	1122	1125	1122	531
35°	996	983	963	955	948	622
45°	810	802	782	768	763	626
55°	614	606	590	575	568	548
65°	414	406	393	381	375	409
75°	216	214	207	200	202	231
85°	53	52	50	46	45	59
90°	1	13	21	26	28	7
95°	68	34	41	46	45	81
105°	320	351	64	76	80	342
115°	604	622	649	162	86	595
125°	855	868	888	896	899	762
135°	1058	1074	1084	1094	1092	817
145°	1227	1226	1244	1251	1246	767
155°	1351	1342	1354	1360	1352	622
165°	1423	1417	1420	1428	1420	402
175°	1456	1449	1451	1458	1448	139
180°	1453	1453	1453	1453	1453	



TEST NUMBER: P918839

CATALOG NUMBER: DFN2DIP-HX2F0-040D050US935-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1340.1	1340.1	1340.1	1340.1	1340.1
2.5°	1347.9	1341.4	1327.2	1340.1	1337.6
5°	1340.1	1335.0	1320.8	1331.0	1328.6
7.5°	1331.0	1323.4	1309.1	1319.6	1317.0
10°	1317.0	1307.9	1292.5	1302.8	1298.9
12.5°	1297.5	1289.9	1274.4	1280.9	1278.2
15°	1275.7	1268.0	1251.2	1256.4	1250.0
17.5°	1248.6	1241.0	1224.2	1230.5	1224.2
20°	1218.9	1211.3	1193.3	1197.0	1192.1
22.5°	1189.4	1177.8	1161.0	1161.0	1158.4
25°	1154.5	1144.3	1122.4	1124.9	1122.4
27.5°	1115.9	1106.8	1090.2	1086.3	1079.9
30°	1077.3	1066.9	1047.7	1043.8	1038.6
32.5°	1036.0	1028.4	1007.7	1000.0	994.7
35°	996.1	983.3	962.6	954.8	948.4
37.5°	951.0	939.3	918.7	909.7	903.3
40°	904.7	894.2	873.6	862.1	857.0
42.5°	859.5	849.1	828.6	815.6	808.0
45°	810.5	801.6	782.1	768.1	762.8
47.5°	762.8	753.8	733.2	719.0	711.4
50°	712.6	706.1	688.1	670.0	663.6
52.5°	663.6	654.6	637.9	623.7	614.7
55°	613.5	605.6	590.2	574.7	568.3
57.5°	563.1	556.7	539.8	524.4	519.3
60°	512.8	507.7	489.7	475.5	471.7
62.5°	463.9	454.9	442.0	429.1	424.0
65°	413.7	405.9	393.0	381.4	375.1
67.5°	362.1	355.6	344.1	335.1	329.9
70°	314.4	309.3	297.6	288.6	283.5
72.5°	265.5	260.3	253.9	244.9	241.0
75°	216.5	214.0	207.4	199.8	202.3
77.5°	172.6	167.5	164.9	161.0	157.2
80°	128.9	127.5	124.9	121.1	118.6
82.5°	87.6	87.6	86.4	81.2	81.2
85°	52.8	51.6	50.3	46.3	45.1
87.5°	23.2	20.7	18.1	14.2	12.8
90°	1.0	12.6	21.0	26.3	28.3
92.5°	26.3	22.1	25.2	27.4	28.3
95°	68.3	33.6	41.0	46.3	45.2
97.5°	123.0	36.9	53.6	56.8	57.8
100°	186.1	42.1	59.9	68.3	70.4
102.5°	255.5	253.4	62.1	73.5	76.8
105°	319.6	351.2	64.1	75.7	79.9
107.5°	394.3	420.4	66.3	77.7	82.1
110°	465.8	487.8	184.0	78.9	83.0



TEST NUMBER: P918839

CATALOG NUMBER: DFN2DIP-HX2F0-040D050US935-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	533.0	551.9	534.1	80.9	84.1
115°	604.5	622.3	648.7	162.0	86.3
117.5°	666.5	687.5	705.5	555.0	279.7
120°	735.9	751.7	770.6	783.2	641.3
122.5°	794.7	811.6	832.7	839.0	840.1
125°	854.6	868.4	888.4	895.7	898.9
127.5°	909.3	924.0	940.0	950.4	951.4
130°	960.9	977.7	989.2	1000.8	999.9
132.5°	1013.5	1027.2	1038.6	1048.2	1047.1
135°	1057.6	1074.5	1083.8	1094.5	1092.3
137.5°	1103.8	1116.5	1127.0	1137.6	1134.5
140°	1149.0	1157.5	1169.0	1178.4	1173.3
142.5°	1187.0	1194.4	1208.0	1216.3	1211.1
145°	1226.9	1225.8	1243.6	1251.0	1245.8
147.5°	1261.5	1258.3	1276.3	1281.5	1277.4
150°	1295.2	1287.9	1304.7	1311.0	1305.7
152.5°	1323.5	1315.2	1330.9	1337.3	1329.9
155°	1350.9	1341.5	1354.1	1360.4	1352.0
157.5°	1372.9	1364.6	1374.1	1381.5	1372.9
160°	1392.0	1385.6	1392.0	1398.2	1390.9
162.5°	1408.7	1402.5	1407.6	1415.0	1405.6
165°	1423.4	1417.2	1420.3	1427.6	1420.3
167.5°	1435.0	1428.7	1431.9	1439.2	1429.8
170°	1444.5	1438.1	1440.3	1447.6	1438.1
172.5°	1450.8	1444.5	1446.6	1454.0	1444.5
175°	1456.0	1448.6	1450.8	1458.1	1447.6
177.5°	1458.1	1450.8	1451.9	1459.2	1449.7
180°	1452.8	1452.8	1452.8	1452.8	1452.8



TEST NUMBER: P918839
 CATALOG NUMBER: DFN2DIP-HX2F0-040D050US935-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.60	11.41	11.60	12.42	13.77	10.17	10.99	11.18	12.00	13.35
	3H	12.23	12.96	13.24	13.98	15.35	11.77	12.50	12.78	13.52	14.89
	4H	12.80	13.49	13.82	14.51	15.89	12.34	13.03	13.36	14.05	15.43
	6H	13.17	13.81	14.21	14.84	16.23	12.72	13.35	13.75	14.38	15.77
	8H	13.27	13.87	14.31	14.92	16.30	12.81	13.42	13.85	14.46	15.85
	12H	13.31	13.88	14.35	14.92	16.33	12.84	13.42	13.89	14.46	15.87
4H	2H	11.04	11.73	12.08	12.76	14.14	10.70	11.39	11.74	12.42	13.80
	3H	12.88	13.45	13.92	14.51	15.89	12.49	13.07	13.53	14.12	15.51
	4H	13.57	14.10	14.62	15.14	16.55	13.17	13.70	14.22	14.75	16.16
	6H	14.06	14.51	15.11	15.58	16.99	13.66	14.12	14.72	15.18	16.59
	8H	14.19	14.62	15.25	15.68	17.10	13.80	14.22	14.85	15.28	16.70
	12H	14.25	14.64	15.33	15.71	17.14	13.85	14.23	14.92	15.31	16.73
8H	4H	13.75	14.17	14.81	15.24	16.66	13.40	13.82	14.46	14.88	16.31
	6H	14.35	14.70	15.43	15.80	17.22	14.00	14.35	15.08	15.45	16.87
	8H	14.55	14.86	15.64	15.95	17.39	14.20	14.51	15.29	15.59	17.03
	12H	14.67	14.94	15.76	16.02	17.50	14.30	14.57	15.39	15.65	17.13
12H	4H	13.73	14.11	14.81	15.19	16.62	13.39	13.77	14.46	14.85	16.27
	6H	14.37	14.68	15.46	15.77	17.21	14.03	14.34	15.12	15.43	16.87
	8H	14.59	14.87	15.69	15.95	17.43	14.25	14.52	15.34	15.60	17.08