

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P921588

Luminaire Tested: DFN2DIP-HX2F0-050D050US940-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P921588
REPORT IS A COMBINATION OF REPORTS P899188 AND P896039
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX2F0-050D050US940-RLLFLL
Description: 2 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7735.6 lumens
Efficiency: N/A
Efficacy: 89.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 1.99' x L: 2.3' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 86
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P921588

CATALOG NUMBER: DFN2DIP-HX2F0-050D050US940-RLLFLL

Luminous Intensity Polar Plot

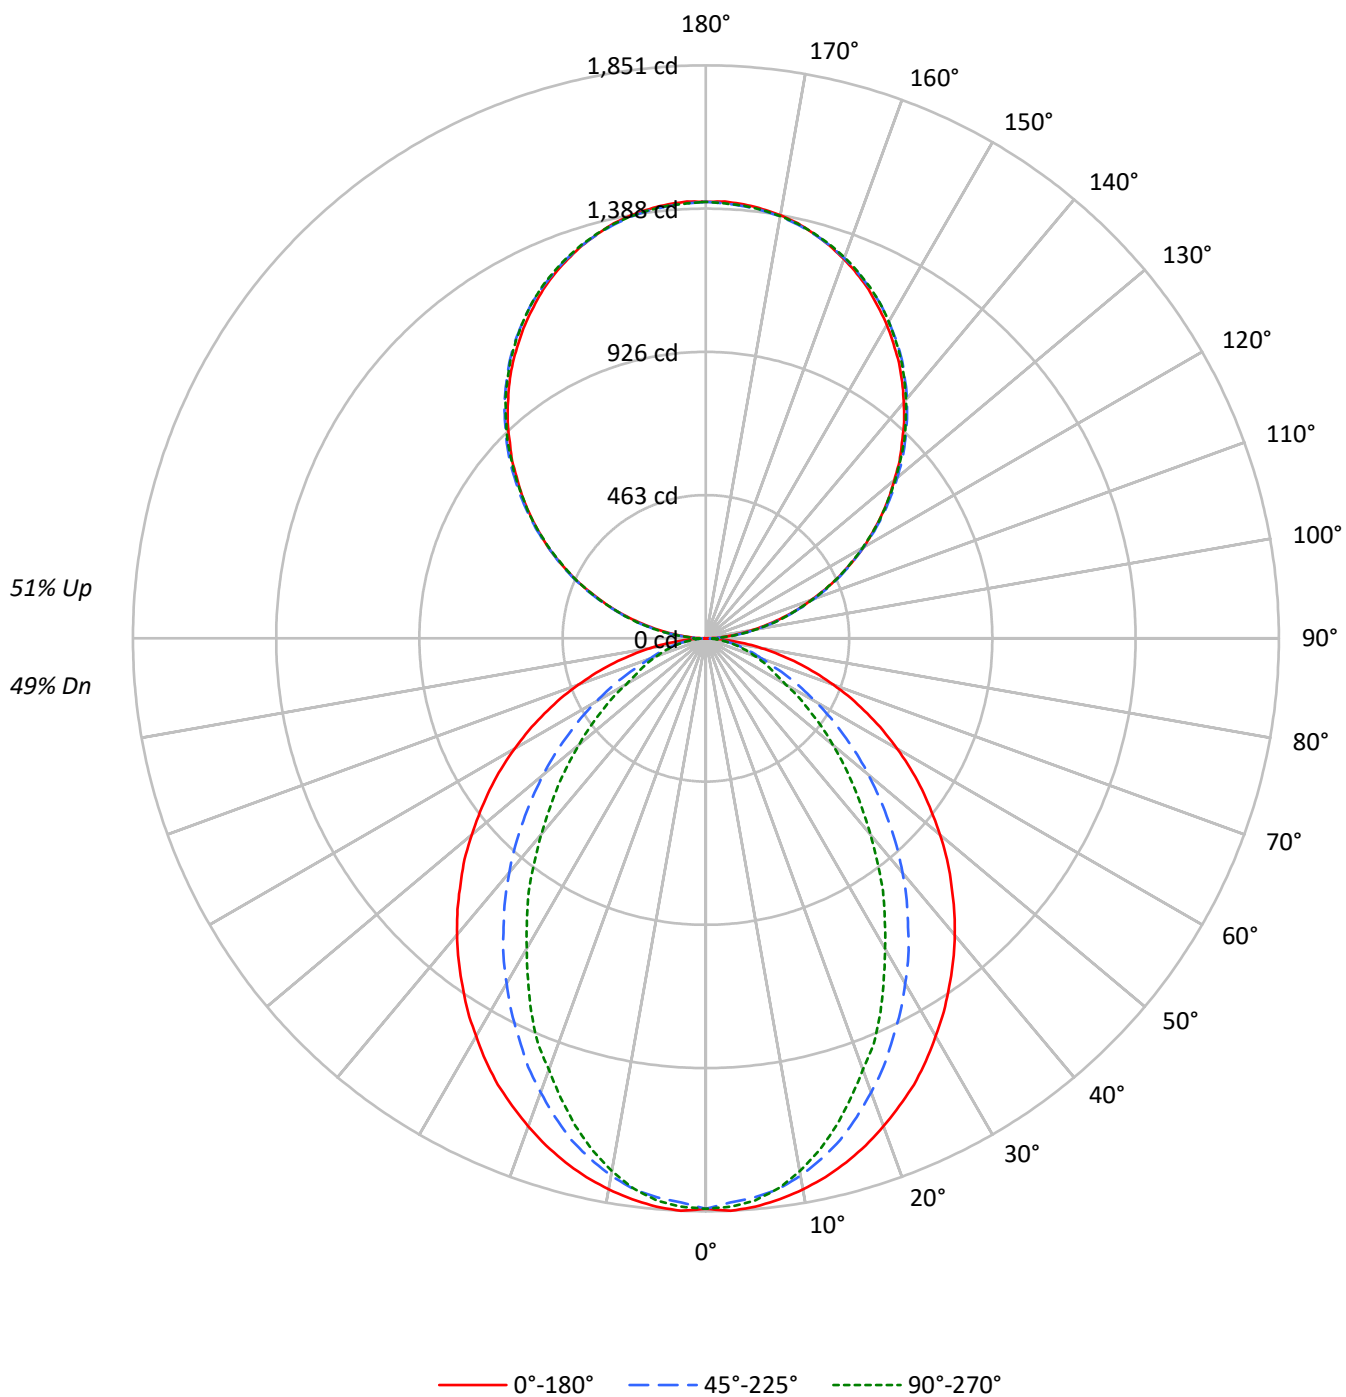

TEST NUMBER: P921588

CATALOG NUMBER: DFN2DIP-HX2F0-050D050US940-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	107	107	107	107	99	99	99	99	83	83	83	68	68	68	55	55	55
1	98	94	90	87	90	87	84	81	73	71	69	61	59	58	50	49	48
2	90	83	77	72	82	76	71	67	65	61	58	54	51	49	44	42	41
3	82	73	66	60	75	68	61	57	58	53	49	48	45	42	40	37	35
4	75	65	57	51	69	60	54	48	51	46	42	43	40	36	36	33	31
5	69	58	50	44	64	54	47	42	46	41	37	39	35	32	32	29	27
6	64	52	44	39	59	49	42	37	42	36	32	35	31	28	30	26	24
7	59	47	40	34	55	44	37	32	38	33	29	32	28	25	27	24	22
8	55	43	36	30	51	40	33	29	35	29	26	30	26	23	25	22	20
9	51	39	32	27	47	37	30	26	32	27	23	27	23	20	23	20	18
10	48	36	29	24	44	34	28	23	30	24	21	25	21	19	22	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4342	4342	4342
5°	4342	4263	4292
10°	4292	4168	4145
15°	4226	4021	3921
20°	4141	3821	3650
25°	4054	3599	3389
30°	3939	3373	3060
35°	3826	3131	2771
40°	3711	2881	2441
45°	3578	2605	2142
50°	3440	2329	1852
55°	3295	2033	1573
60°	3127	1727	1287
65°	2933	1416	1150
70°	2699	1127	1029
75°	2403	973	921
80°	1977	789	775
85°	1294	487	544

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 3578 cd/sqm

TEST NUMBER: P921588

CATALOG NUMBER: DFN2DIP-HX2F0-050D050US940-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	172.7	2.2
10°-20°	474.1	6.1
20°-30°	665.6	8.6
30°-40°	725.6	9.4
40°-50°	666.9	8.6
50°-60°	523.7	6.8
60°-70°	340.9	4.4
70°-80°	175.5	2.3
80°-90°	48.8	0.6
90°-100°	87.3	1.1
100°-110°	277.2	3.6
110°-120°	474.5	6.1
120°-130°	624.0	8.1
130°-140°	700.4	9.1
140°-150°	686.8	8.9
150°-160°	576.1	7.4
160°-170°	382.1	4.9
170°-180°	133.5	1.7
0°-30°	1312.4	17.0
0°-40°	2038.0	26.3
0°-60°	3228.6	41.7
0°-90°	3793.8	49.0
90°-120°	838.9	10.8
90°-150°	2850.1	36.8
90°-180°	3942.0	51.0
0°-180°	7735.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1843	1843	1843	1843	1843	
5°	1843	1834	1813	1828	1823	175
15°	1753	1734	1678	1646	1629	494
25°	1591	1538	1427	1359	1334	732
35°	1371	1286	1139	1034	997	858
45°	1121	1009	834	715	675	865
55°	852	722	542	442	410	761
65°	575	440	290	234	228	570
75°	307	190	133	122	120	324
85°	72	37	32	32	32	82
90°	1	15	42	39	40	8
95°	62	74	76	76	74	69
105°	256	259	262	264	264	270
115°	476	483	481	480	476	471
125°	692	703	700	696	695	619
135°	896	909	911	910	907	692
145°	1087	1096	1103	1104	1099	679
155°	1243	1247	1251	1257	1253	572
165°	1353	1351	1351	1360	1354	382
175°	1408	1404	1402	1410	1403	134
180°	1410	1410	1410	1410	1410	

TEST NUMBER: P921588

CATALOG NUMBER: DFN2DIP-HX2F0-050D050US940-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1842.7	1842.7	1842.7	1842.7	1842.7
2.5°	1851.0	1842.7	1824.4	1841.1	1837.7
5°	1842.7	1834.4	1812.7	1827.6	1822.7
7.5°	1827.6	1817.8	1794.4	1801.0	1792.6
10°	1807.7	1796.0	1762.7	1757.7	1747.7
12.5°	1782.7	1767.7	1722.6	1712.7	1694.2
15°	1752.7	1734.3	1677.7	1646.0	1629.3
17.5°	1717.6	1691.0	1620.9	1584.2	1557.5
20°	1677.7	1644.2	1560.8	1519.3	1482.5
22.5°	1634.3	1595.9	1499.1	1442.5	1417.6
25°	1590.9	1537.5	1427.4	1359.1	1334.0
27.5°	1539.3	1482.5	1360.8	1282.4	1244.0
30°	1484.3	1420.8	1287.4	1202.4	1157.3
32.5°	1430.8	1354.1	1217.5	1117.3	1075.6
35°	1370.8	1285.8	1139.1	1033.9	997.2
37.5°	1312.4	1220.7	1065.7	950.5	908.9
40°	1250.7	1150.8	988.8	870.5	827.2
42.5°	1187.4	1080.7	912.2	788.7	747.2
45°	1120.7	1008.9	833.8	715.3	675.3
47.5°	1057.3	939.0	758.8	640.3	603.7
50°	987.3	868.9	685.5	570.2	535.4
52.5°	918.8	793.7	615.4	505.3	473.7
55°	852.1	722.0	541.9	441.9	410.3
57.5°	783.8	650.4	477.0	383.6	356.9
60°	713.7	580.3	408.5	323.6	296.9
62.5°	645.4	512.0	350.2	270.2	256.9
65°	575.3	440.2	290.2	233.5	228.5
67.5°	508.6	373.5	233.5	205.1	200.1
70°	438.6	308.5	193.4	176.7	170.0
72.5°	371.9	248.4	161.8	148.5	145.1
75°	306.8	190.0	133.4	121.7	120.1
77.5°	241.8	135.0	105.1	98.4	95.0
80°	181.7	96.8	80.0	73.4	73.4
82.5°	126.7	65.1	55.0	51.6	51.6
85°	71.7	36.6	31.7	31.7	31.7
87.5°	26.8	13.3	13.3	11.7	11.7
90°	1.2	15.3	41.6	39.1	40.4
92.5°	26.4	35.7	37.0	38.3	38.3
95°	62.1	74.0	76.1	76.1	74.0
97.5°	103.3	114.3	119.0	119.0	119.0
100°	150.9	160.7	164.1	164.1	162.8
102.5°	201.1	208.3	212.9	214.3	212.9
105°	255.9	259.3	261.9	263.9	263.9
107.5°	310.3	315.4	315.4	316.3	310.3
110°	363.0	369.9	369.9	369.9	366.4

TEST NUMBER: P921588

CATALOG NUMBER: DFN2DIP-HX2F0-050D050US940-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	420.0	427.2	426.0	422.6	420.0
115°	476.1	483.0	480.8	479.6	476.1
117.5°	531.8	541.2	535.2	531.8	528.4
120°	587.9	597.3	587.9	587.9	584.1
122.5°	638.9	650.9	644.9	641.5	638.9
125°	692.5	703.1	699.7	695.9	694.6
127.5°	744.8	758.0	753.3	748.1	744.8
130°	793.7	809.0	806.8	804.3	799.6
132.5°	848.6	860.4	861.3	855.3	851.9
135°	895.7	908.8	911.4	910.2	906.8
137.5°	948.4	959.0	961.2	960.3	955.2
140°	994.7	1005.4	1011.3	1011.3	1006.7
142.5°	1042.3	1053.0	1056.4	1057.7	1053.0
145°	1087.4	1095.9	1102.7	1104.0	1099.3
147.5°	1127.8	1138.4	1143.5	1145.7	1140.9
150°	1169.5	1176.7	1181.3	1185.2	1181.3
152.5°	1206.5	1213.7	1219.6	1224.3	1219.6
155°	1243.4	1246.8	1250.6	1256.6	1252.8
157.5°	1275.3	1277.8	1280.0	1288.5	1282.5
160°	1303.8	1306.4	1307.6	1314.8	1309.7
162.5°	1330.2	1330.2	1331.4	1339.5	1333.6
165°	1352.7	1351.4	1351.4	1359.9	1354.0
167.5°	1373.1	1369.2	1369.2	1377.8	1371.8
170°	1388.4	1385.0	1383.8	1392.2	1385.0
172.5°	1399.0	1395.6	1394.4	1402.8	1395.6
175°	1407.6	1404.1	1401.6	1410.1	1402.8
177.5°	1412.2	1408.8	1406.2	1413.5	1406.2
180°	1410.1	1410.1	1410.1	1410.1	1410.1

TEST NUMBER: P921588

CATALOG NUMBER: DFN2DIP-HX2F0-050D050US940-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.02	12.84	12.99	13.82	15.11	8.00	8.82	8.97	9.81	11.09
	3H	13.67	14.41	14.65	15.40	16.71	9.17	9.91	10.16	10.90	12.21
	4H	14.26	14.96	15.26	15.95	17.27	9.61	10.31	10.61	11.30	12.62
	6H	14.66	15.30	15.67	16.30	17.63	9.92	10.56	10.92	11.56	12.89
	8H	14.78	15.39	15.79	16.40	17.73	10.00	10.61	11.01	11.62	12.95
	12H	14.83	15.41	15.85	16.42	17.77	10.04	10.61	11.05	11.62	12.97
4H	2H	12.03	12.73	13.04	13.72	15.04	8.58	9.28	9.59	10.27	11.59
	3H	13.83	14.41	14.84	15.43	16.76	9.91	10.49	10.92	11.51	12.84
	4H	14.50	15.03	15.52	16.05	17.40	10.45	10.97	11.46	11.99	13.34
	6H	15.00	15.45	16.03	16.49	17.84	10.85	11.30	11.88	12.34	13.69
	8H	15.16	15.58	16.19	16.61	17.98	10.96	11.39	12.00	12.42	13.79
	12H	15.24	15.62	16.29	16.67	18.04	11.02	11.40	12.07	12.45	13.82
8H	4H	14.47	14.89	15.50	15.92	17.29	10.71	11.13	11.74	12.17	13.53
	6H	15.01	15.36	16.06	16.43	17.79	11.20	11.55	12.26	12.63	13.99
	8H	15.21	15.51	16.27	16.57	17.96	11.38	11.69	12.44	12.75	14.13
	12H	15.33	15.60	16.39	16.65	18.08	11.49	11.76	12.55	12.81	14.24
12H	4H	14.42	14.80	15.47	15.85	17.22	10.71	11.09	11.76	12.14	13.51
	6H	14.98	15.29	16.04	16.35	17.73	11.25	11.56	12.31	12.61	14.00
	8H	15.18	15.45	16.25	16.51	17.93	11.44	11.71	12.51	12.77	14.19