

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P924245

Luminaire Tested: DFN2DIP-HX2F0-020D020US950-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P924245
REPORT IS A COMBINATION OF REPORTS P900672 AND P897595
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX2F0-020D020US950-RLLONL
Description: 2 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3510.7 lumens
Efficiency: N/A
Efficacy: 115.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 1.99' x L: 2.3' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 30.5
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P924245

CATALOG NUMBER: DFN2DIP-HX2F0-020D020US950-RLLONL

Luminous Intensity Polar Plot

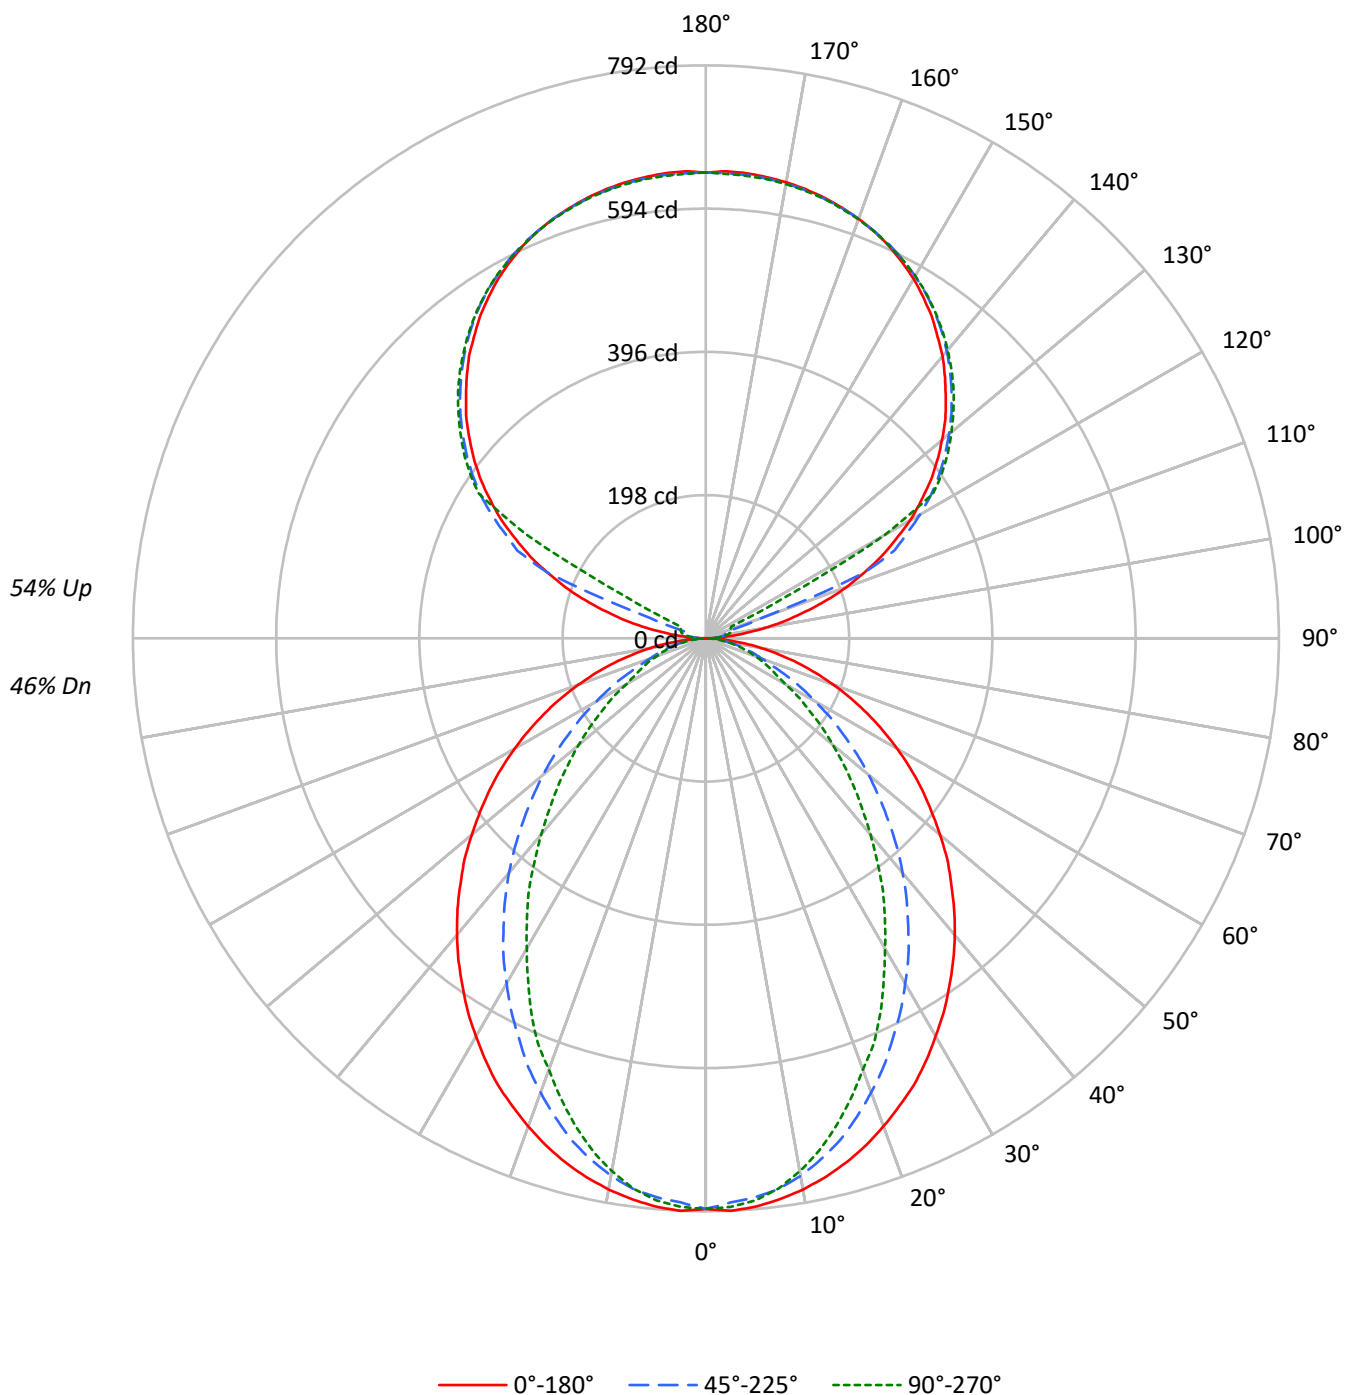

TEST NUMBER: P924245

CATALOG NUMBER: DFN2DIP-HX2F0-020D020US950-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	106	106	106	106	98	98	98	98	81	81	81	66	66	66	53	53	53	46		
1	97	93	90	86	89	86	83	80	72	70	68	59	58	56	47	46	45	40		
2	89	82	76	71	82	76	70	66	63	60	57	52	50	48	42	40	39	34		
3	81	72	65	60	75	67	61	56	56	52	48	47	43	41	38	35	34	29		
4	75	64	57	51	68	60	53	48	50	45	41	42	38	35	34	31	29	26		
5	69	58	50	44	63	53	46	41	45	40	36	38	34	31	31	28	26	23		
6	63	52	44	38	58	48	41	36	41	36	32	34	30	27	28	25	23	20		
7	59	47	39	34	54	44	37	32	37	32	28	31	27	24	26	23	21	18		
8	55	43	35	30	50	40	33	28	34	29	25	29	25	22	24	21	19	16		
9	51	39	32	27	47	36	30	25	31	26	22	27	23	20	22	19	17	15		
10	48	36	29	24	44	33	27	23	29	24	20	25	21	18	20	18	15	13		

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1858	1858	1858
5°	1858	1824	1837
10°	1837	1784	1774
15°	1808	1721	1678
20°	1772	1635	1562
25°	1735	1540	1450
30°	1686	1444	1309
35°	1637	1340	1186
40°	1588	1233	1044
45°	1531	1115	917
50°	1472	997	793
55°	1410	870	673
60°	1339	739	551
65°	1255	606	492
70°	1155	482	441
75°	1028	416	394
80°	847	337	332
85°	552	208	232

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 1531 cd/sqm

TEST NUMBER: P924245

CATALOG NUMBER: DFN2DIP-HX2F0-020D020US950-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	73.9	2.1
10°-20°	202.9	5.8
20°-30°	284.8	8.1
30°-40°	310.5	8.8
40°-50°	285.4	8.1
50°-60°	224.1	6.4
60°-70°	145.9	4.2
70°-80°	75.1	2.1
80°-90°	20.3	0.6
90°-100°	21.2	0.6
100°-110°	79.1	2.3
110°-120°	209.9	6.0
120°-130°	348.2	9.9
130°-140°	369.8	10.5
140°-150°	343.7	9.8
150°-160°	276.4	7.9
160°-170°	178.1	5.1
170°-180°	61.3	1.7
0°-30°	561.6	16.0
0°-40°	872.1	24.8
0°-60°	1381.7	39.4
0°-90°	1622.9	46.2
90°-120°	310.3	8.8
90°-150°	1372.0	39.1
90°-180°	1888.0	53.8
0°-180°	3510.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	789	789	789	789	789	
5°	789	785	776	782	780	75
15°	750	742	718	704	697	211
25°	681	658	611	582	571	313
35°	587	550	488	442	427	367
45°	480	432	357	306	289	370
55°	365	309	232	189	176	326
65°	246	188	124	100	98	244
75°	131	81	57	52	51	139
85°	31	16	14	14	14	35
90°	0	6	9	12	13	3
95°	30	15	18	20	20	36
105°	142	156	28	34	35	151
115°	268	276	288	72	38	264
125°	379	385	394	397	398	338
135°	469	476	480	485	484	362
145°	544	543	551	554	552	340
155°	599	594	600	603	599	276
165°	631	628	629	633	629	178
175°	645	642	643	646	642	61
180°	644	644	644	644	644	

TEST NUMBER: P924245

CATALOG NUMBER: DFN2DIP-HX2F0-020D020US950-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	788.6	788.6	788.6	788.6	788.6
2.5°	792.1	788.6	780.7	787.9	786.5
5°	788.6	785.0	775.7	782.2	780.0
7.5°	782.2	777.9	767.9	770.7	767.1
10°	773.6	768.5	754.3	752.1	747.9
12.5°	762.9	756.4	737.2	733.0	725.0
15°	750.0	742.1	717.9	704.3	697.3
17.5°	735.1	723.6	693.7	677.9	666.6
20°	717.9	703.6	668.0	650.2	634.4
22.5°	699.4	683.0	641.6	617.3	606.6
25°	680.9	658.0	610.8	581.7	570.9
27.5°	658.7	634.4	582.3	548.7	532.3
30°	635.2	608.0	550.9	514.6	495.2
32.5°	612.3	579.5	521.0	478.1	460.3
35°	586.6	550.3	487.5	442.5	426.7
37.5°	561.6	522.3	456.0	406.8	388.9
40°	535.2	492.5	423.2	372.5	353.9
42.5°	508.1	462.5	390.4	337.5	319.8
45°	479.6	431.7	356.9	306.1	289.0
47.5°	452.5	401.8	324.7	274.0	258.3
50°	422.5	371.9	293.4	244.0	229.2
52.5°	393.1	339.6	263.3	216.3	202.7
55°	364.6	309.0	231.9	189.2	175.5
57.5°	335.4	278.3	204.2	164.2	152.7
60°	305.5	248.3	174.9	138.5	127.1
62.5°	276.2	219.1	149.9	115.6	109.9
65°	246.2	188.4	124.2	100.0	97.8
67.5°	217.7	159.8	100.0	87.8	85.7
70°	187.7	132.0	82.7	75.7	72.8
72.5°	159.1	106.3	69.2	63.5	62.1
75°	131.3	81.3	57.0	52.1	51.4
77.5°	103.5	57.8	44.9	42.1	40.6
80°	77.8	41.4	34.2	31.4	31.4
82.5°	54.2	27.9	23.6	22.1	22.1
85°	30.6	15.6	13.5	13.5	13.5
87.5°	11.4	5.7	5.7	5.0	5.0
90°	0.5	5.6	9.3	11.6	12.6
92.5°	11.6	9.8	11.2	12.1	12.6
95°	30.2	14.9	18.1	20.5	20.0
97.5°	54.5	16.3	23.8	25.2	25.7
100°	82.5	18.6	26.5	30.2	31.2
102.5°	113.2	112.3	27.5	32.6	34.1
105°	141.7	155.6	28.4	33.5	35.4
107.5°	174.8	186.3	29.4	34.4	36.3
110°	206.4	216.2	81.6	35.0	36.8



TEST NUMBER: P924245

CATALOG NUMBER: DFN2DIP-HX2F0-020D020US950-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	236.2	244.6	236.7	35.9	37.3
115°	267.9	275.8	287.5	71.7	38.3
117.5°	295.4	304.7	312.6	246.0	123.9
120°	326.2	333.1	341.5	347.2	284.2
122.5°	352.2	359.7	369.0	371.8	372.3
125°	378.8	384.8	393.7	397.0	398.4
127.5°	403.1	409.6	416.6	421.2	421.7
130°	425.9	433.3	438.5	443.6	443.1
132.5°	449.1	455.2	460.3	464.5	464.1
135°	468.8	476.2	480.3	485.1	484.2
137.5°	489.2	494.8	499.5	504.2	502.8
140°	509.2	513.1	518.1	522.3	520.0
142.5°	526.0	529.4	535.4	539.1	536.7
145°	543.8	543.3	551.2	554.5	552.2
147.5°	559.1	557.7	565.6	567.9	566.1
150°	574.0	570.8	578.2	581.0	578.7
152.5°	586.6	582.9	589.9	592.7	589.4
155°	598.7	594.5	600.2	602.9	599.2
157.5°	608.6	604.8	609.0	612.3	608.6
160°	617.0	614.1	617.0	619.7	616.5
162.5°	624.3	621.5	623.9	627.2	623.0
165°	630.9	628.1	629.4	632.8	629.4
167.5°	636.0	633.2	634.6	637.9	633.6
170°	640.2	637.4	638.3	641.6	637.4
172.5°	643.0	640.2	641.2	644.4	640.2
175°	645.3	642.0	643.0	646.2	641.6
177.5°	646.2	643.0	643.5	646.7	642.5
180°	643.9	643.9	643.9	643.9	643.9

TEST NUMBER: P924245

CATALOG NUMBER: DFN2DIP-HX2F0-020D020US950-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.80	9.60	9.79	10.60	11.93	4.78	5.58	5.78	6.59	7.91
	3H	10.45	11.16	11.45	12.18	13.52	5.95	6.67	6.96	7.68	9.03
	4H	11.04	11.72	12.06	12.73	14.09	6.39	7.07	7.41	8.08	9.44
	6H	11.44	12.06	12.47	13.08	14.45	6.69	7.32	7.72	8.34	9.70
	8H	11.55	12.15	12.59	13.18	14.54	6.78	7.37	7.81	8.40	9.77
	12H	11.60	12.17	12.64	13.20	14.58	6.81	7.37	7.85	8.40	9.79
4H	2H	8.81	9.49	9.83	10.50	11.86	5.36	6.04	6.39	7.05	8.41
	3H	10.61	11.17	11.64	12.21	13.58	6.69	7.25	7.72	8.30	9.66
	4H	11.28	11.79	12.32	12.83	14.22	7.22	7.74	8.26	8.77	10.16
	6H	11.77	12.21	12.82	13.27	14.66	7.62	8.06	8.67	9.12	10.51
	8H	11.93	12.34	12.98	13.39	14.79	7.74	8.15	8.79	9.20	10.60
	12H	12.01	12.38	13.08	13.45	14.85	7.79	8.16	8.86	9.23	10.64
8H	4H	11.24	11.65	12.29	12.70	14.11	7.48	7.90	8.53	8.95	10.35
	6H	11.78	12.12	12.85	13.21	14.61	7.98	8.32	9.05	9.41	10.81
	8H	11.98	12.28	13.06	13.35	14.77	8.15	8.45	9.24	9.53	10.95
	12H	12.10	12.36	13.18	13.43	14.89	8.26	8.52	9.34	9.59	11.05
12H	4H	11.19	11.56	12.26	12.63	14.03	7.48	7.86	8.55	8.92	10.33
	6H	11.75	12.05	12.83	13.13	14.55	8.02	8.32	9.10	9.40	10.81
	8H	11.95	12.22	13.04	13.29	14.75	8.21	8.48	9.30	9.55	11.01