

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P924274

Luminaire Tested: DFN2DIP-HX2F0-030D050US950-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P924274
REPORT IS A COMBINATION OF REPORTS P899183 AND P896039
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX2F0-030D050US950-FLLFLL
Description: 2 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7054.8 lumens
Efficiency: N/A
Efficacy: 110.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 1.99' x L: 2.3' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 63.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9951
Total Harmonic Distortion (THDi): 0.07
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P924274

CATALOG NUMBER: DFN2DIP-HX2F0-030D050US950-FLLFLL

Luminous Intensity Polar Plot

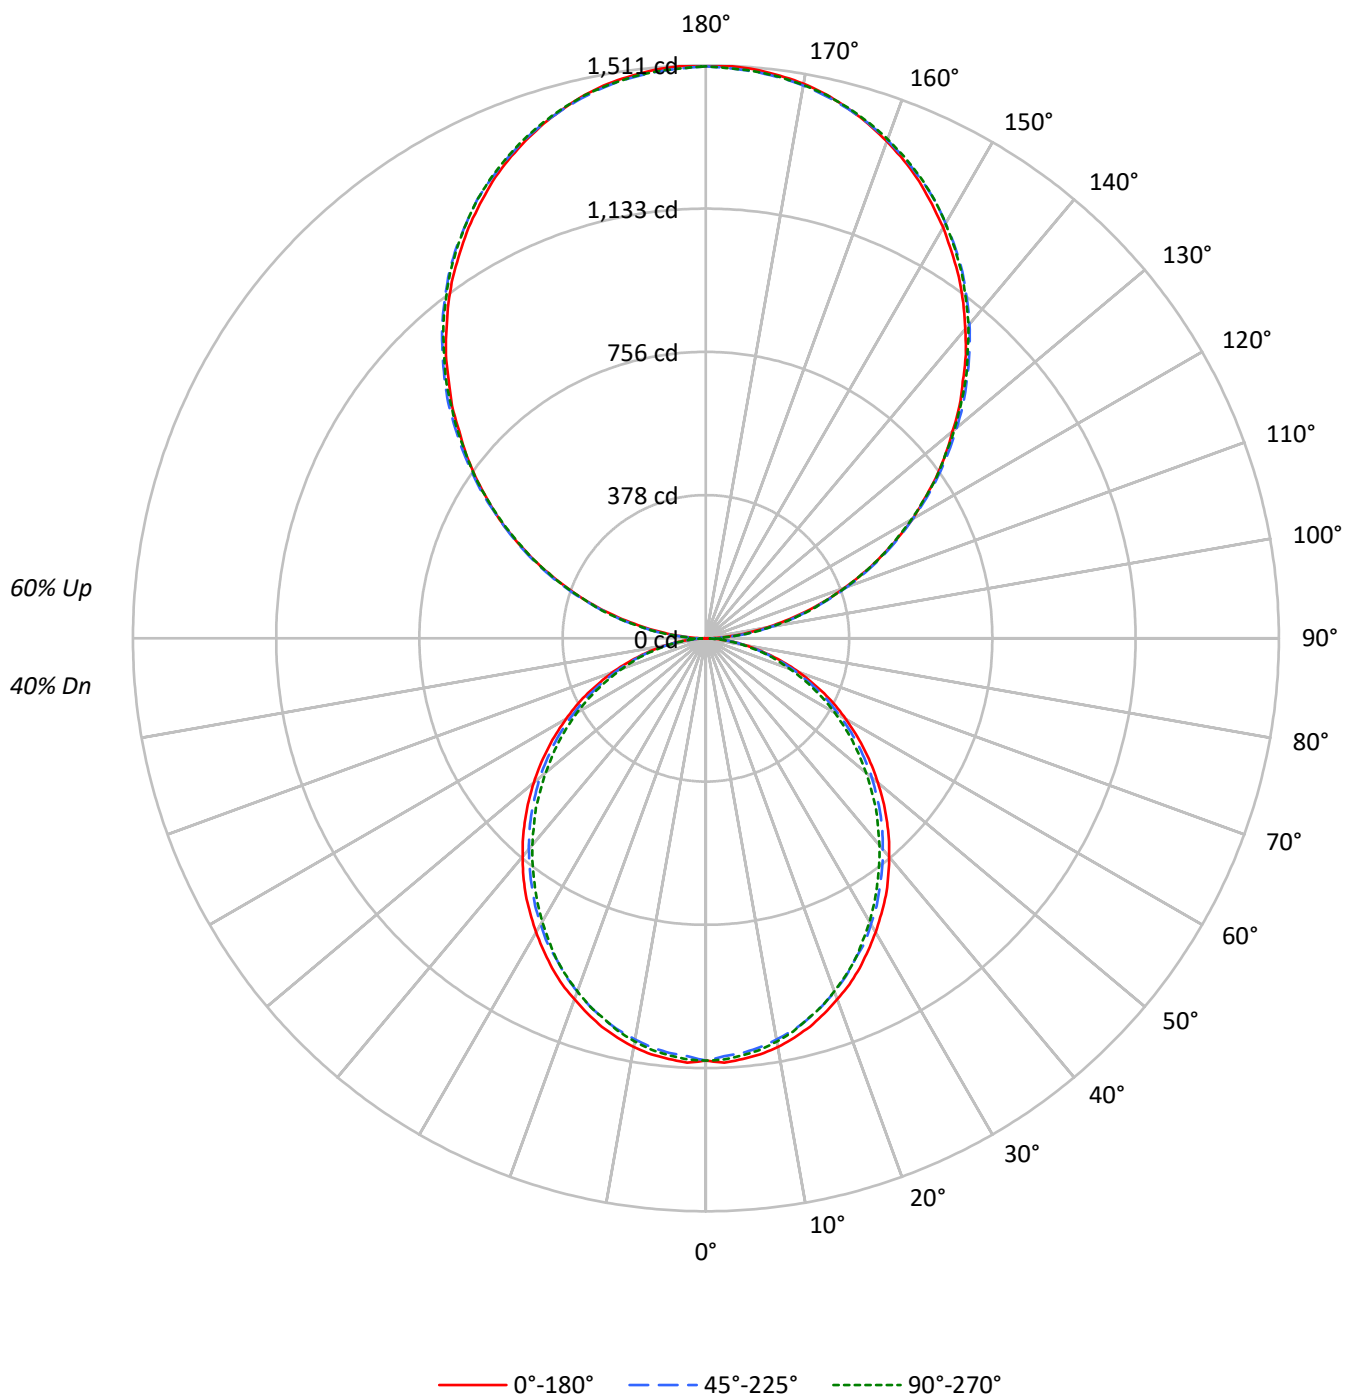

TEST NUMBER: P924274

CATALOG NUMBER: DFN2DIP-HX2F0-030D050US950-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	95	95	95	95	78	78	78	62	62	62	47	47	47
1	96	91	87	84	87	83	80	77	68	66	64	54	53	51	42	41	40
2	87	80	74	69	79	73	68	63	60	56	53	48	45	43	37	35	33
3	79	70	63	57	72	64	58	53	53	48	44	42	39	36	32	30	28
4	73	62	54	48	66	57	50	45	47	42	38	38	34	31	29	27	25
5	67	55	47	41	60	51	44	38	42	37	33	34	30	27	26	23	21
6	61	49	41	36	56	45	38	33	38	32	28	30	27	24	24	21	19
7	57	45	37	31	51	41	34	29	34	29	25	28	24	21	22	19	17
8	52	40	33	28	48	37	30	26	31	26	22	25	21	18	20	17	15
9	49	37	29	24	44	34	27	23	28	23	20	23	19	17	18	16	14
10	46	34	27	22	41	31	25	20	26	21	18	21	18	15	17	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2624	2624	2624
5°	2624	2581	2600
10°	2598	2540	2560
15°	2556	2492	2500
20°	2500	2428	2439
25°	2445	2352	2369
30°	2376	2281	2282
35°	2311	2199	2190
40°	2231	2115	2102
45°	2151	2031	2011
50°	2063	1942	1907
55°	1972	1841	1810
60°	1868	1720	1699
65°	1753	1594	1569
70°	1608	1442	1426
75°	1408	1258	1289
80°	1165	1023	1040
85°	792	643	644

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2151 cd/sqm

TEST NUMBER: P924274

CATALOG NUMBER: DFN2DIP-HX2F0-030D050US950-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	104.8	1.5
10°-20°	294.9	4.2
20°-30°	433.4	6.1
30°-40°	503.4	7.1
40°-50°	502.7	7.1
50°-60°	438.4	6.2
60°-70°	324.1	4.6
70°-80°	183.3	2.6
80°-90°	52.7	0.7
90°-100°	93.4	1.3
100°-110°	296.6	4.2
110°-120°	507.6	7.2
120°-130°	667.5	9.5
130°-140°	749.3	10.6
140°-150°	734.8	10.4
150°-160°	616.4	8.7
160°-170°	408.8	5.8
170°-180°	142.9	2.0
0°-30°	833.1	11.8
0°-40°	1336.5	18.9
0°-60°	2277.6	32.3
0°-90°	2837.7	40.2
90°-120°	897.5	12.7
90°-150°	3049.2	43.2
90°-180°	4217.0	59.8
0°-180°	7054.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1114	1114	1114	1114	1114	
5°	1114	1109	1098	1106	1104	106
15°	1060	1054	1040	1044	1039	299
25°	959	951	933	935	933	441
35°	828	817	800	793	788	517
45°	674	666	650	638	634	520
55°	510	503	490	478	472	456
65°	344	337	327	317	312	340
75°	180	178	172	166	168	192
85°	44	43	42	38	38	49
90°	1	16	45	42	43	7
95°	66	79	81	81	79	74
105°	274	277	280	282	282	289
115°	509	517	514	513	509	504
125°	741	752	749	744	743	662
135°	958	972	975	974	970	741
145°	1163	1172	1180	1181	1176	727
155°	1330	1334	1338	1344	1340	612
165°	1447	1446	1446	1455	1449	408
175°	1506	1502	1500	1509	1501	143
180°	1509	1509	1509	1509	1509	

TEST NUMBER: P924274

CATALOG NUMBER: DFN2DIP-HX2F0-030D050US950-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1113.6	1113.6	1113.6	1113.6	1113.6
2.5°	1120.1	1114.7	1102.9	1113.6	1111.6
5°	1113.6	1109.4	1097.6	1106.2	1104.1
7.5°	1106.2	1099.8	1087.9	1096.6	1094.4
10°	1094.4	1086.9	1074.1	1082.6	1079.5
12.5°	1078.3	1071.9	1059.1	1064.4	1062.3
15°	1060.1	1053.8	1039.8	1044.1	1038.7
17.5°	1037.6	1031.3	1017.3	1022.6	1017.3
20°	1013.0	1006.6	991.6	994.7	990.5
22.5°	988.4	978.8	964.8	964.8	962.6
25°	959.4	950.9	932.7	934.8	932.7
27.5°	927.3	919.8	905.9	902.8	897.4
30°	895.2	886.6	870.6	867.4	863.1
32.5°	861.0	854.6	837.4	830.9	826.6
35°	827.8	817.1	799.9	793.4	788.1
37.5°	790.3	780.7	763.5	755.9	750.6
40°	751.8	743.2	726.0	716.5	712.2
42.5°	714.3	705.7	688.6	677.8	671.4
45°	673.6	666.1	650.0	638.2	633.9
47.5°	633.9	626.5	609.3	597.5	591.1
50°	592.1	586.8	571.8	556.8	551.5
52.5°	551.5	544.0	530.1	518.3	510.8
55°	509.8	503.3	490.5	477.7	472.3
57.5°	467.9	462.6	448.7	435.8	431.5
60°	426.2	422.0	407.0	395.1	392.0
62.5°	385.5	378.0	367.3	356.6	352.3
65°	343.8	337.3	326.6	317.0	311.7
67.5°	301.0	295.5	285.9	278.5	274.2
70°	261.3	257.0	247.4	239.8	235.6
72.5°	220.7	216.3	210.9	203.5	200.3
75°	179.8	177.8	172.4	166.0	168.2
77.5°	143.5	139.2	137.0	133.8	130.7
80°	107.1	106.0	103.8	100.6	98.5
82.5°	72.8	72.8	71.8	67.4	67.4
85°	43.9	42.8	41.8	38.5	37.5
87.5°	19.3	17.2	15.0	11.8	10.7
90°	1.3	16.4	44.6	41.9	43.2
92.5°	28.2	38.2	39.6	40.9	40.9
95°	66.4	79.2	81.4	81.4	79.2
97.5°	110.5	122.3	127.4	127.4	127.4
100°	161.4	171.9	175.5	175.5	174.2
102.5°	215.1	222.9	227.8	229.2	227.8
105°	273.8	277.4	280.2	282.4	282.4
107.5°	332.0	337.4	337.4	338.4	332.0
110°	388.4	395.7	395.7	395.7	392.0

TEST NUMBER: P924274

CATALOG NUMBER: DFN2DIP-HX2F0-030D050US950-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	449.3	457.1	455.7	452.1	449.3
115°	509.3	516.7	514.4	513.1	509.3
117.5°	569.0	579.0	572.6	569.0	565.3
120°	629.0	639.0	629.0	629.0	624.9
122.5°	683.5	696.3	689.9	686.3	683.5
125°	740.9	752.2	748.6	744.5	743.2
127.5°	796.8	810.9	805.9	800.4	796.8
130°	849.2	865.5	863.2	860.5	855.5
132.5°	907.8	920.5	921.5	915.1	911.5
135°	958.3	972.3	975.1	973.7	970.1
137.5°	1014.7	1026.0	1028.3	1027.4	1021.9
140°	1064.2	1075.6	1081.9	1081.9	1077.0
142.5°	1115.1	1126.6	1130.2	1131.5	1126.6
145°	1163.4	1172.5	1179.7	1181.1	1176.1
147.5°	1206.6	1218.0	1223.4	1225.7	1220.6
150°	1251.2	1258.9	1263.9	1268.0	1263.9
152.5°	1290.8	1298.5	1304.8	1309.8	1304.8
155°	1330.3	1333.9	1338.0	1344.4	1340.3
157.5°	1364.4	1367.1	1369.4	1378.5	1372.1
160°	1394.8	1397.6	1398.9	1406.7	1401.2
162.5°	1423.1	1423.1	1424.4	1433.1	1426.7
165°	1447.2	1445.8	1445.8	1454.9	1448.6
167.5°	1469.0	1464.9	1464.9	1474.0	1467.6
170°	1485.4	1481.8	1480.4	1489.5	1481.8
172.5°	1496.7	1493.1	1491.8	1500.8	1493.1
175°	1505.9	1502.2	1499.5	1508.6	1500.8
177.5°	1510.8	1507.2	1504.5	1512.2	1504.5
180°	1508.6	1508.6	1508.6	1508.6	1508.6

TEST NUMBER: P924274

CATALOG NUMBER: DFN2DIP-HX2F0-030D050US950-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.51	10.29	10.54	11.33	12.73	9.08	9.86	10.12	10.91	12.31
	3H	11.14	11.84	12.18	12.89	14.31	10.68	11.37	11.72	12.43	13.85
	4H	11.70	12.37	12.76	13.42	14.85	11.24	11.91	12.30	12.96	14.39
	6H	12.08	12.69	13.15	13.75	15.19	11.62	12.23	12.69	13.29	14.73
	8H	12.17	12.75	13.24	13.83	15.26	11.71	12.30	12.79	13.37	14.81
	12H	12.21	12.76	13.29	13.83	15.29	11.75	12.30	12.82	13.37	14.83
4H	2H	9.95	10.61	11.01	11.67	13.10	9.61	10.27	10.68	11.33	12.76
	3H	11.78	12.33	12.85	13.41	14.86	11.39	11.95	12.47	13.03	14.47
	4H	12.47	12.98	13.55	14.05	15.51	12.08	12.58	13.15	13.66	15.12
	6H	12.96	13.39	14.04	14.49	15.95	12.56	13.00	13.65	14.09	15.55
	8H	13.09	13.50	14.18	14.59	16.06	12.69	13.10	13.78	14.19	15.66
	12H	13.15	13.52	14.25	14.62	16.10	12.74	13.11	13.85	14.21	15.69
8H	4H	12.65	13.06	13.74	14.14	15.62	12.30	12.70	13.38	13.79	15.27
	6H	13.25	13.58	14.36	14.71	16.18	12.90	13.23	14.01	14.36	15.83
	8H	13.45	13.74	14.57	14.86	16.35	13.09	13.39	14.21	14.50	15.99
	12H	13.56	13.82	14.68	14.93	16.46	13.19	13.45	14.31	14.56	16.09
12H	4H	12.63	13.00	13.73	14.10	15.58	12.28	12.65	13.39	13.75	15.23
	6H	13.27	13.57	14.39	14.68	16.17	12.93	13.22	14.05	14.34	15.83
	8H	13.49	13.75	14.61	14.86	16.39	13.14	13.40	14.26	14.51	16.04