

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P902542

Luminaire Tested: DFN2DIP-HX3F0-040D030US830-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P902542
REPORT IS A COMBINATION OF REPORTS P899203 AND P896089
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX3F0-040D030US830-FLLFLL
Description: 3 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6234.9 lumens
Efficiency: N/A
Efficacy: 108.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.84' x L: 3.28' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 57.4
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P902542

CATALOG NUMBER: DFN2DIP-HX3F0-040D030US830-FLLFLL

Luminous Intensity Polar Plot

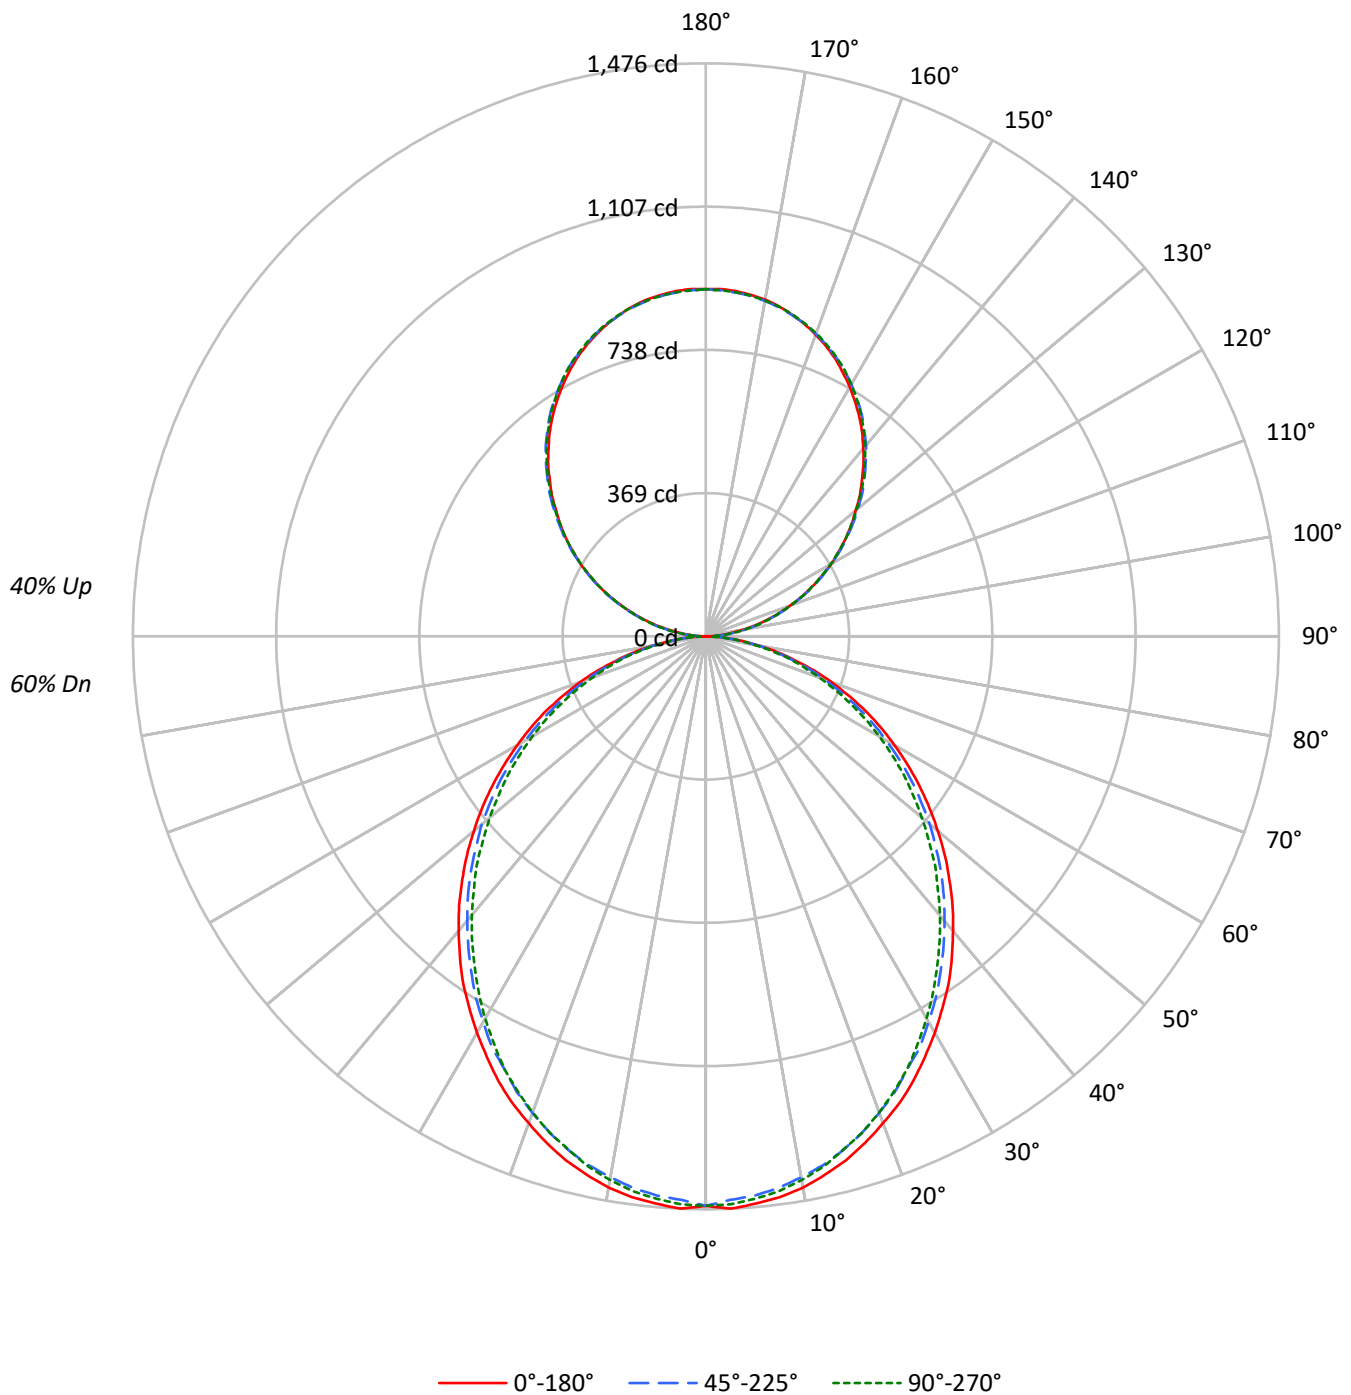

TEST NUMBER: P902542

CATALOG NUMBER: DFN2DIP-HX3F0-040D030US830-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	110	110	110	110	102	102	102	102	89	89	89	77	77	77	65	65	65
1	100	96	92	88	93	89	86	83	78	75	73	67	66	64	58	56	55
2	91	84	77	72	85	78	73	68	68	64	61	59	56	53	51	48	46
3	83	73	66	60	77	69	62	57	60	55	51	52	48	45	45	42	40
4	76	65	57	51	71	61	54	48	54	48	43	47	42	39	40	37	34
5	70	58	50	44	65	55	47	42	48	42	38	42	37	34	36	33	30
6	64	52	44	38	60	49	42	36	43	37	33	38	33	29	33	29	26
7	60	47	39	33	56	44	37	32	39	33	29	35	30	26	30	26	23
8	55	43	35	30	52	40	33	28	36	30	26	32	27	23	28	24	21
9	52	39	32	26	48	37	30	25	33	27	23	29	24	21	26	22	19
10	48	36	29	24	45	34	27	23	30	25	21	27	22	19	24	20	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1699	1699	1699
5°	1701	1674	1686
10°	1687	1651	1662
15°	1661	1622	1626
20°	1627	1583	1588
25°	1593	1537	1545
30°	1550	1494	1490
35°	1510	1443	1433
40°	1460	1392	1378
45°	1410	1340	1321
50°	1356	1286	1256
55°	1300	1224	1196
60°	1235	1149	1127
65°	1165	1072	1046
70°	1076	978	958
75°	952	866	876
80°	802	722	722
85°	569	477	468

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 1410 cd/sqm

TEST NUMBER: P902542

CATALOG NUMBER: DFN2DIP-HX3F0-040D030US830-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	138.1	2.2
10°-20°	388.5	6.2
20°-30°	570.9	9.2
30°-40°	663.1	10.6
40°-50°	662.3	10.6
50°-60°	577.5	9.3
60°-70°	426.9	6.8
70°-80°	241.5	3.9
80°-90°	66.3	1.1
90°-100°	55.3	0.9
100°-110°	175.8	2.8
110°-120°	300.9	4.8
120°-130°	395.7	6.3
130°-140°	444.2	7.1
140°-150°	435.6	7.0
150°-160°	365.4	5.9
160°-170°	242.3	3.9
170°-180°	84.7	1.4
0°-30°	1097.5	17.6
0°-40°	1760.6	28.2
0°-60°	3000.3	48.1
0°-90°	3735.0	59.9
90°-120°	532.1	8.5
90°-150°	1807.5	29.0
90°-180°	2500.0	40.1
0°-180°	6234.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1467	1467	1467	1467	1467	
5°	1467	1461	1446	1457	1454	139
15°	1396	1388	1370	1375	1368	393
25°	1264	1253	1229	1231	1229	582
35°	1090	1076	1054	1045	1038	681
45°	887	878	856	841	835	685
55°	672	663	646	629	622	600
65°	453	444	430	418	411	448
75°	237	234	227	219	222	253
85°	58	56	55	51	49	64
90°	1	10	26	25	26	6
95°	39	47	48	48	47	44
105°	162	164	166	167	167	171
115°	302	306	305	304	302	299
125°	439	446	444	441	440	392
135°	568	576	578	577	575	439
145°	690	695	699	700	697	431
155°	789	791	793	797	795	363
165°	858	857	857	862	859	242
175°	893	890	889	894	890	85
180°	894	894	894	894	894	

TEST NUMBER: P902542

CATALOG NUMBER: DFN2DIP-HX3F0-040D030US830-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1467.0	1467.0	1467.0	1467.0	1467.0
2.5°	1475.5	1468.5	1452.9	1467.0	1464.3
5°	1467.0	1461.4	1445.9	1457.1	1454.4
7.5°	1457.1	1448.7	1433.1	1444.5	1441.7
10°	1441.7	1431.8	1414.9	1426.2	1421.9
12.5°	1420.4	1412.0	1395.2	1402.2	1399.3
15°	1396.5	1388.1	1369.7	1375.4	1368.4
17.5°	1366.9	1358.5	1340.1	1347.1	1340.1
20°	1334.4	1326.0	1306.3	1310.4	1304.9
22.5°	1302.0	1289.3	1270.9	1270.9	1268.1
25°	1263.9	1252.6	1228.7	1231.4	1228.7
27.5°	1221.5	1211.6	1193.4	1189.2	1182.2
30°	1179.3	1168.0	1146.9	1142.6	1137.0
32.5°	1134.2	1125.8	1103.2	1094.7	1088.9
35°	1090.4	1076.4	1053.8	1045.3	1038.2
37.5°	1041.0	1028.3	1005.7	995.9	988.8
40°	990.3	978.9	956.3	943.8	938.1
42.5°	940.9	929.5	907.1	892.9	884.5
45°	887.3	877.5	856.2	840.8	835.1
47.5°	835.1	825.2	802.7	787.1	778.7
50°	780.0	773.0	753.3	733.5	726.4
52.5°	726.4	716.6	698.3	682.8	672.9
55°	671.6	663.0	646.1	629.1	622.2
57.5°	616.4	609.4	591.0	574.1	568.4
60°	561.4	555.8	536.1	520.6	516.3
62.5°	507.8	497.9	483.9	469.8	464.1
65°	452.9	444.3	430.3	417.5	410.6
67.5°	396.4	389.3	376.7	366.8	361.2
70°	344.2	338.6	325.8	315.9	310.4
72.5°	290.7	284.9	278.0	268.1	263.8
75°	237.0	234.2	227.1	218.7	221.5
77.5°	189.0	183.3	180.5	176.3	172.1
80°	141.1	139.6	136.8	132.6	129.8
82.5°	96.0	96.0	94.6	88.9	88.9
85°	57.8	56.5	55.0	50.7	49.4
87.5°	25.4	22.6	19.8	15.6	14.0
90°	0.8	9.7	26.4	24.8	25.6
92.5°	16.7	22.6	23.5	24.2	24.2
95°	39.4	46.9	48.3	48.3	46.9
97.5°	65.5	72.5	75.5	75.5	75.5
100°	95.7	101.9	104.1	104.1	103.3
102.5°	127.5	132.1	135.1	135.9	135.1
105°	162.3	164.5	166.1	167.4	167.4
107.5°	196.8	200.0	200.0	200.6	196.8
110°	230.3	234.6	234.6	234.6	232.4

TEST NUMBER: P902542

CATALOG NUMBER: DFN2DIP-HX3F0-040D030US830-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	266.4	271.0	270.1	268.0	266.4
115°	302.0	306.2	304.9	304.2	302.0
117.5°	337.2	343.2	339.4	337.2	335.1
120°	372.9	378.8	372.9	372.9	370.4
122.5°	405.2	412.7	409.0	406.8	405.2
125°	439.2	445.9	443.7	441.3	440.5
127.5°	472.3	480.7	477.8	474.5	472.3
130°	503.3	513.0	511.7	510.1	507.1
132.5°	538.1	545.6	546.2	542.4	540.3
135°	568.1	576.4	578.1	577.2	575.0
137.5°	601.4	608.2	609.5	609.1	605.8
140°	630.8	637.6	641.4	641.4	638.4
142.5°	661.1	667.8	670.0	670.8	667.8
145°	689.7	695.0	699.4	700.1	697.2
147.5°	715.3	722.0	725.2	726.6	723.6
150°	741.7	746.3	749.2	751.7	749.2
152.5°	765.2	769.7	773.5	776.5	773.5
155°	788.6	790.7	793.1	796.9	794.6
157.5°	808.8	810.4	811.8	817.2	813.4
160°	826.9	828.5	829.3	833.9	830.7
162.5°	843.6	843.6	844.4	849.5	845.7
165°	857.9	857.1	857.1	862.4	858.7
167.5°	870.8	868.4	868.4	873.7	870.0
170°	880.5	878.4	877.6	883.0	878.4
172.5°	887.2	885.1	884.3	889.7	885.1
175°	892.7	890.5	888.9	894.3	889.7
177.5°	895.6	893.4	891.8	896.5	891.8
180°	894.3	894.3	894.3	894.3	894.3

TEST NUMBER: P902542

CATALOG NUMBER: DFN2DIP-HX3F0-040D030US830-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.94	10.89	10.80	11.78	12.91	9.51	10.47	10.37	11.35	12.48
	3H	11.60	12.46	12.48	13.35	14.50	11.13	11.99	12.01	12.89	14.03
	4H	12.18	13.00	13.08	13.90	15.06	11.71	12.53	12.61	13.43	14.59
	6H	12.58	13.33	13.49	14.24	15.41	12.11	12.86	13.02	13.77	14.94
	8H	12.69	13.40	13.60	14.33	15.50	12.22	12.93	13.13	13.86	15.03
	12H	12.74	13.41	13.66	14.34	15.53	12.26	12.94	13.18	13.86	15.06
4H	2H	10.41	11.22	11.31	12.12	13.28	10.06	10.88	10.96	11.78	12.94
	3H	12.27	12.95	13.18	13.89	15.06	11.88	12.56	12.79	13.50	14.67
	4H	12.98	13.60	13.91	14.53	15.73	12.58	13.20	13.51	14.13	15.33
	6H	13.50	14.03	14.43	14.99	16.19	13.09	13.63	14.03	14.58	15.78
	8H	13.65	14.15	14.58	15.09	16.31	13.24	13.74	14.18	14.69	15.90
	12H	13.72	14.17	14.68	15.14	16.36	13.30	13.75	14.26	14.72	15.94
8H	4H	13.19	13.69	14.12	14.63	15.85	12.83	13.33	13.77	14.28	15.49
	6H	13.81	14.23	14.78	15.22	16.43	13.45	13.87	14.42	14.86	16.07
	8H	14.03	14.39	15.00	15.37	16.60	13.66	14.03	14.64	15.01	16.24
	12H	14.16	14.48	15.14	15.45	16.73	13.78	14.10	14.76	15.08	16.35
12H	4H	13.18	13.63	14.13	14.59	15.81	12.83	13.28	13.78	14.24	15.46
	6H	13.84	14.21	14.81	15.19	16.42	13.49	13.86	14.47	14.84	16.07
	8H	14.08	14.40	15.06	15.38	16.66	13.73	14.05	14.71	15.02	16.30

END OF REPORT