

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P902546

Luminaire Tested: DFN2DIP-HX3F0-040D040US830-FLLFLL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P902546  
REPORT IS A COMBINATION OF REPORTS P899217 AND P896089  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-HX3F0-040D040US830-FLLFLL  
Description: 3 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7069.0 lumens  
Efficiency: N/A  
Efficacy: 110.1 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29  
Luminous Opening: Rectangular w/ Sides (W: 2.84' x L: 3.28' x H: 0.1')  
CIE Type: General Diffuse  
  
Input Watts (W): 64.2  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9968  
Total Harmonic Distortion (THDi): 0.064  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P902546  
CATALOG NUMBER: DFN2DIP-HX3F0-040D040US830-FLLFLL

### Luminous Intensity Polar Plot

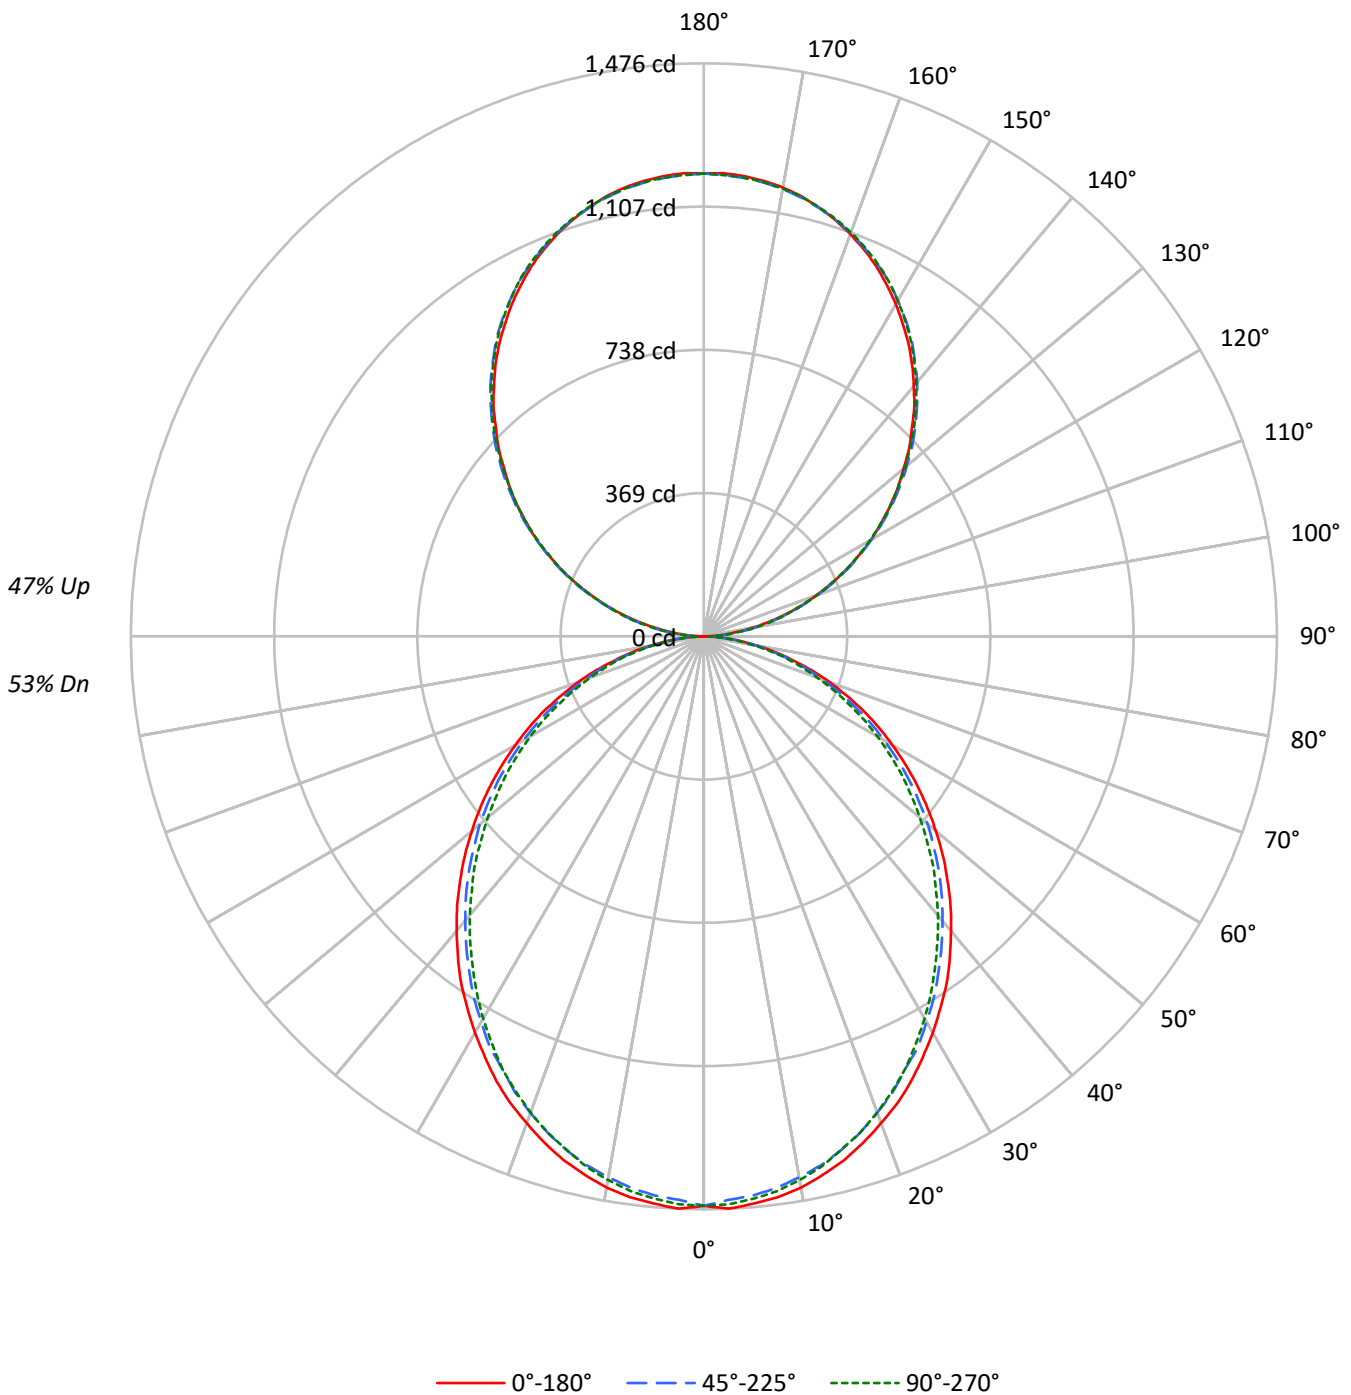



TEST NUMBER: P902546

CATALOG NUMBER: DFN2DIP-HX3F0-040D040US830-FLLFLL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	59	59	59	53
1	98	94	90	87	91	87	84	81	74	72	70	63	61	59	52	51	50	45
2	90	82	76	71	83	76	71	66	65	61	58	55	52	50	46	44	42	37
3	82	72	65	59	75	67	61	55	58	53	49	49	45	42	41	38	36	32
4	75	64	56	50	69	60	52	47	51	46	41	43	39	36	36	33	31	27
5	69	57	49	43	63	53	46	40	46	40	36	39	35	31	33	29	27	24
6	63	51	43	37	58	48	40	35	41	36	31	35	31	27	30	26	24	21
7	59	46	38	33	54	43	36	31	37	32	28	32	28	24	27	24	21	18
8	54	42	34	29	50	39	32	27	34	29	24	29	25	22	25	21	19	16
9	51	38	31	26	47	36	29	24	31	26	22	27	23	19	23	20	17	15
10	47	35	28	23	44	33	26	22	29	23	20	25	21	18	21	18	15	13

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1699	1699	1699
5°	1701	1674	1686
10°	1687	1651	1662
15°	1661	1622	1626
20°	1627	1583	1588
25°	1593	1537	1545
30°	1550	1494	1490
35°	1510	1443	1433
40°	1460	1392	1378
45°	1410	1340	1321
50°	1356	1286	1256
55°	1300	1224	1196
60°	1235	1149	1127
65°	1165	1072	1046
70°	1076	978	958
75°	952	866	876
80°	802	722	722
85°	569	477	468

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 1410 cd/sqm



TEST NUMBER: P902546

CATALOG NUMBER: DFN2DIP-HX3F0-040D040US830-FLLFLL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	138.1	2.0
10°-20°	388.5	5.5
20°-30°	570.9	8.1
30°-40°	663.1	9.4
40°-50°	662.3	9.4
50°-60°	577.5	8.2
60°-70°	426.9	6.0
70°-80°	241.5	3.4
80°-90°	67.1	0.9
90°-100°	73.8	1.0
100°-110°	234.4	3.3
110°-120°	401.2	5.7
120°-130°	527.6	7.5
130°-140°	592.2	8.4
140°-150°	580.8	8.2
150°-160°	487.2	6.9
160°-170°	323.1	4.6
170°-180°	112.9	1.6
0°-30°	1097.5	15.5
0°-40°	1760.6	24.9
0°-60°	3000.3	42.4
0°-90°	3735.9	52.8
90°-120°	709.4	10.0
90°-150°	2410.0	34.1
90°-180°	3333.0	47.1
0°-180°	7069.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1467	1467	1467	1467	1467	
5°	1467	1461	1446	1457	1454	139
15°	1396	1388	1370	1375	1368	393
25°	1264	1253	1229	1231	1229	582
35°	1090	1076	1054	1045	1038	681
45°	887	878	856	841	835	685
55°	672	663	646	629	622	600
65°	453	444	430	418	411	448
75°	237	234	227	219	222	253
85°	58	56	55	51	49	64
90°	1	13	35	33	34	7
95°	52	63	64	64	63	58
105°	216	219	221	223	223	228
115°	403	408	406	406	403	398
125°	586	595	592	588	587	523
135°	757	768	771	770	767	585
145°	920	927	932	934	930	575
155°	1051	1054	1058	1063	1059	484
165°	1144	1143	1143	1150	1145	323
175°	1190	1187	1185	1192	1186	113
180°	1192	1192	1192	1192	1192	



TEST NUMBER: P902546

CATALOG NUMBER: DFN2DIP-HX3F0-040D040US830-FLLFLL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1467.0	1467.0	1467.0	1467.0	1467.0
2.5°	1475.5	1468.5	1452.9	1467.0	1464.3
5°	1467.0	1461.4	1445.9	1457.1	1454.4
7.5°	1457.1	1448.7	1433.1	1444.5	1441.7
10°	1441.7	1431.8	1414.9	1426.2	1421.9
12.5°	1420.4	1412.0	1395.2	1402.2	1399.3
15°	1396.5	1388.1	1369.7	1375.4	1368.4
17.5°	1366.9	1358.5	1340.1	1347.1	1340.1
20°	1334.4	1326.0	1306.3	1310.4	1304.9
22.5°	1302.0	1289.3	1270.9	1270.9	1268.1
25°	1263.9	1252.6	1228.7	1231.4	1228.7
27.5°	1221.5	1211.6	1193.4	1189.2	1182.2
30°	1179.3	1168.0	1146.9	1142.6	1137.0
32.5°	1134.2	1125.8	1103.2	1094.7	1088.9
35°	1090.4	1076.4	1053.8	1045.3	1038.2
37.5°	1041.0	1028.3	1005.7	995.9	988.8
40°	990.3	978.9	956.3	943.8	938.1
42.5°	940.9	929.5	907.1	892.9	884.5
45°	887.3	877.5	856.2	840.8	835.1
47.5°	835.1	825.2	802.7	787.1	778.7
50°	780.0	773.0	753.3	733.5	726.4
52.5°	726.4	716.6	698.3	682.8	672.9
55°	671.6	663.0	646.1	629.1	622.2
57.5°	616.4	609.4	591.0	574.1	568.4
60°	561.4	555.8	536.1	520.6	516.3
62.5°	507.8	497.9	483.9	469.8	464.1
65°	452.9	444.3	430.3	417.5	410.6
67.5°	396.4	389.3	376.7	366.8	361.2
70°	344.2	338.6	325.8	315.9	310.4
72.5°	290.7	284.9	278.0	268.1	263.8
75°	237.0	234.2	227.1	218.7	221.5
77.5°	189.0	183.3	180.5	176.3	172.1
80°	141.1	139.6	136.8	132.6	129.8
82.5°	96.0	96.0	94.6	88.9	88.9
85°	57.8	56.5	55.0	50.7	49.4
87.5°	25.4	22.6	19.8	15.6	14.0
90°	1.0	12.9	35.3	33.1	34.1
92.5°	22.2	30.2	31.3	32.3	32.3
95°	52.5	62.6	64.4	64.4	62.6
97.5°	87.4	96.7	100.7	100.7	100.7
100°	127.6	135.9	138.7	138.7	137.7
102.5°	170.0	176.2	180.1	181.2	180.1
105°	216.4	219.2	221.4	223.2	223.2
107.5°	262.4	266.7	266.7	267.4	262.4
110°	307.0	312.7	312.7	312.7	309.9



TEST NUMBER: P902546

CATALOG NUMBER: DFN2DIP-HX3F0-040D040US830-FLLFLL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	355.1	361.3	360.1	357.3	355.1
115°	402.6	408.4	406.5	405.5	402.6
117.5°	449.7	457.6	452.6	449.7	446.9
120°	497.2	505.0	497.2	497.2	493.9
122.5°	540.3	550.4	545.4	542.4	540.3
125°	585.6	594.6	591.7	588.4	587.4
127.5°	629.8	640.9	637.0	632.6	629.8
130°	671.1	684.1	682.3	680.1	676.2
132.5°	717.5	727.5	728.3	723.2	720.4
135°	757.4	768.5	770.7	769.6	766.8
137.5°	802.0	811.0	812.8	812.0	807.8
140°	841.1	850.2	855.2	855.2	851.2
142.5°	881.5	890.4	893.2	894.4	890.4
145°	919.5	926.7	932.5	933.6	929.6
147.5°	953.7	962.6	967.0	968.7	964.8
150°	988.9	995.0	999.0	1002.2	999.0
152.5°	1020.2	1026.2	1031.3	1035.3	1031.3
155°	1051.4	1054.3	1057.5	1062.6	1059.3
157.5°	1078.5	1080.5	1082.3	1089.6	1084.5
160°	1102.5	1104.7	1105.7	1111.8	1107.5
162.5°	1124.7	1124.7	1125.9	1132.7	1127.7
165°	1143.9	1142.7	1142.7	1149.9	1144.9
167.5°	1161.1	1157.8	1157.8	1165.1	1160.0
170°	1174.0	1171.1	1170.1	1177.2	1171.1
172.5°	1183.0	1180.2	1179.0	1186.3	1180.2
175°	1190.2	1187.3	1185.2	1192.3	1186.3
177.5°	1194.2	1191.3	1189.1	1195.2	1189.1
180°	1192.3	1192.3	1192.3	1192.3	1192.3



TEST NUMBER: P902546  
 CATALOG NUMBER: DFN2DIP-HX3F0-040D040US830-FLLFLL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.33	10.22	10.26	11.17	12.40	8.90	9.79	9.83	10.74	11.97
	3H	10.98	11.78	11.93	12.74	13.99	10.51	11.31	11.46	12.27	13.52
	4H	11.57	12.32	12.53	13.28	14.55	11.10	11.85	12.06	12.82	14.08
	6H	11.96	12.66	12.93	13.63	14.90	11.49	12.19	12.46	13.16	14.43
	8H	12.06	12.73	13.04	13.71	14.98	11.60	12.26	12.57	13.24	14.51
	12H	12.11	12.74	13.09	13.72	15.02	11.64	12.27	12.62	13.25	14.54
4H	2H	9.79	10.54	10.75	11.51	12.77	9.45	10.20	10.41	11.16	12.43
	3H	11.65	12.28	12.62	13.27	14.55	11.26	11.89	12.23	12.88	14.16
	4H	12.36	12.93	13.34	13.92	15.22	11.96	12.53	12.94	13.52	14.82
	6H	12.87	13.36	13.86	14.37	15.67	12.46	12.96	13.46	13.97	15.27
	8H	13.02	13.48	14.01	14.48	15.79	12.61	13.07	13.60	14.07	15.39
	12H	13.09	13.50	14.10	14.52	15.84	12.67	13.09	13.68	14.11	15.43
8H	4H	12.56	13.02	13.55	14.02	15.33	12.20	12.66	13.19	13.66	14.98
	6H	13.18	13.56	14.20	14.61	15.92	12.82	13.20	13.84	14.25	15.56
	8H	13.39	13.73	14.42	14.76	16.09	13.03	13.37	14.06	14.40	15.73
	12H	13.52	13.82	14.55	14.85	16.22	13.14	13.44	14.18	14.47	15.84
12H	4H	12.54	12.96	13.56	13.98	15.30	12.19	12.61	13.21	13.63	14.95
	6H	13.21	13.54	14.24	14.58	15.91	12.86	13.20	13.89	14.23	15.56
	8H	13.44	13.74	14.48	14.77	16.14	13.09	13.39	14.12	14.41	15.79